



22-23 * vk leading light 1978 * new products catalog

leading light 1978 * new products catalogue 22-23 * vk

new

products

22-23

VK Leading Light

Since 1978



Parallel

universe

VK Leading Light

Since 1978

A: 8 Aristotelous St, Tavros, 177 78 Athens, Greece
T: +30 210 99 69 610-11, +30 210 34 58 072, +30 210 34 58 075
F: +30 210 99 58 374
E: info@vkleadinglight.gr
W: vkleadinglight.gr

Entrance: 13 Petrou Ralli St

Working Hours

Monday - Friday 8:00 - 18:00

Saturday 9:00 - 14:00

index


01 Outdoor lights

Pages 12-37




02 Decorative lighting

Pages 38-59

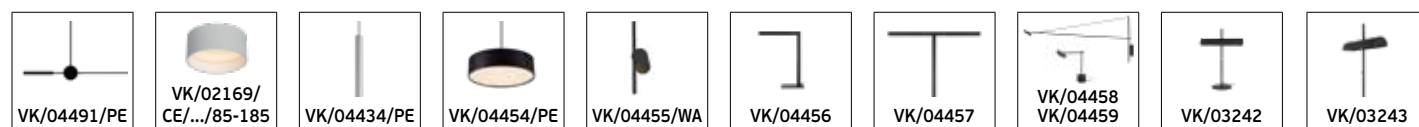


03 Recessed

Pages 60-75

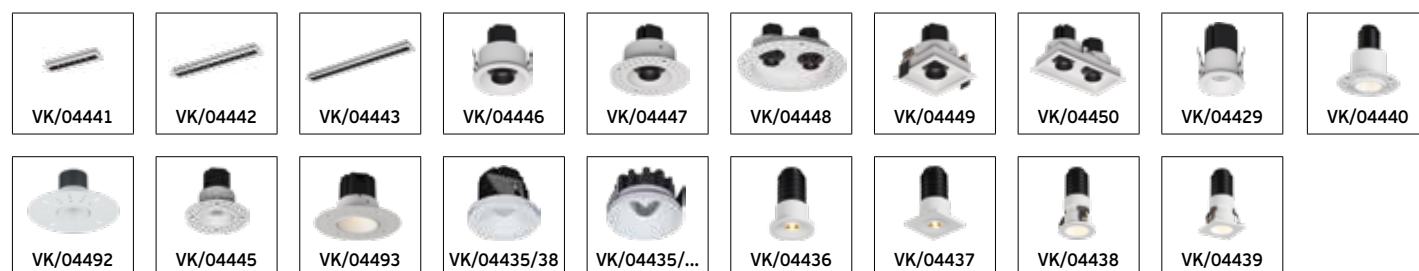

04 Magnetic ultra slim

Pages 76-107

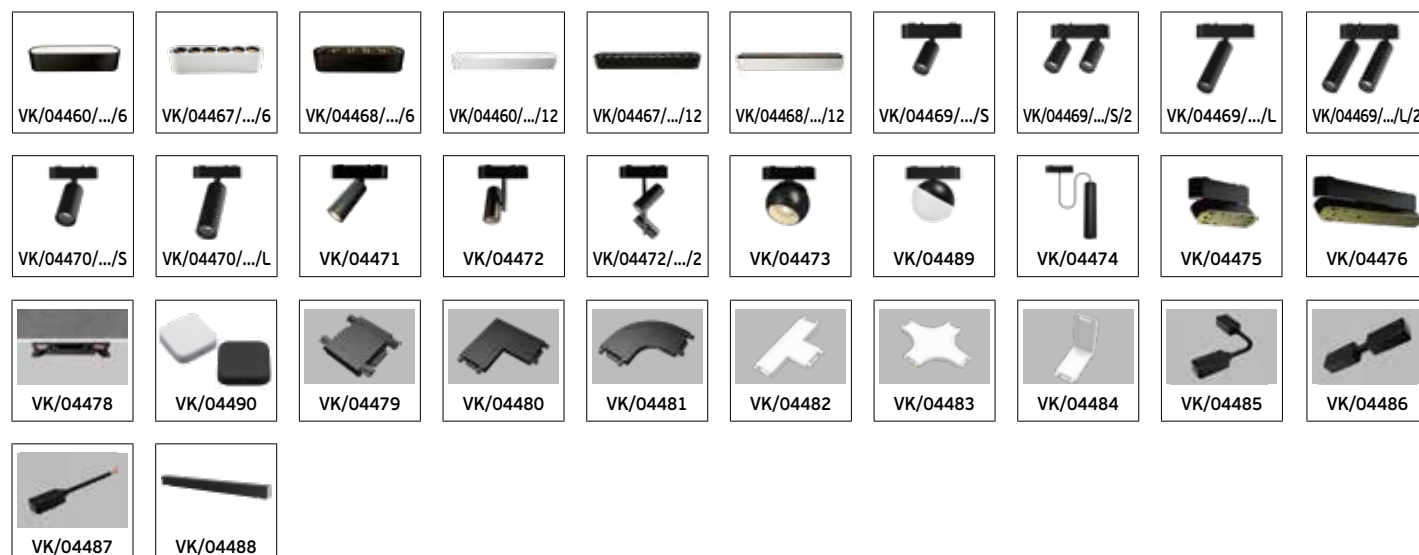

05 Magnetic track lighting

Page 108-111



VK/04433/TR

06 Track lights, ceiling & pendant lights

Pages 112-177



VK/04452/TR



VK/04453/TR



VK/04428/TR



VK/04428/REF



VK/04477/TR



VK/04477/WA




VK/04431



VK/04350/TR



VK/04350/TR/D



VK/04350/HONEYCOMB



VK/04352/TR



VK/04352/TR/D



VK/04352/HONEYCOMB



VK/04354/TR



VK/04354/TR/D



VK/04354/HONEYCOMB



VK/04350/WA



VK/04350/WA/D



VK/04350/HONEYCOMB



VK/04352/WA



VK/04352/WA/D



VK/04352/HONEYCOMB



VK/04354/WA



VK/04354/WA/D



VK/04354/HONEYCOMB




VK/04350/CE/.../15



VK/04350/CE/D/.../15



VK/04350/HONEYCOMB



VK/04352/CE/.../17



VK/04352/CE/D/.../17



VK/04352/HONEYCOMB



VK/04354/CE/.../18



VK/04354/CE/D/.../18



VK/04354/HONEYCOMB




VK/04350/PE/.../15



VK/04350/PE/D/.../15




VK/04350/HONEYCOMB



VK/04352/PE/.../17



VK/04352/PE/D/.../17



VK/04352/HONEYCOMB



VK/04424



VK/04426



VK/09



VK/10




VK/12




VK/K01



VK/GU10-E27/EME/3A



VK/GU10-E27/EME/6A



VK/04244, VK/04246



A40PBOX 100DB-150DB



A40SLBOX 60DB



A40PBF0 60D0B-100D0B



A40PLKE 1090B-2050B



A40DALI 1102B



A40PBOX 20D2B

outdoor lights 01

A dark, grainy landscape under a starry night sky. A bright, diagonal streak of light, possibly a comet or meteor, cuts across the upper half of the frame. The foreground is a dark, textured surface, likely a field of low-lying vegetation or a rocky terrain, illuminated by a soft, warm light source from the right, creating a gradient of light and shadow. The horizon is a flat line separating the dark ground from the starry sky.

HIRO



H I R O





VK/02166

Product Models


Code	Model	Box
63158-001115	VK/02166/B/D ■ Black. 5000K. 17.000lm. 200W. 4°. CRI>80	1pc

Details


Led Focus Light. Voltage 110-240V. Watt 200W. CRI>80. IP Rating IP66.
Type of Led Citizen048-2818C4. No Dimmable. Lifetime 20.000 hrs.
Working temperature -40 ~ 50°C. Material Aluminium. Driver MOSO. 2 years guarantee.




IP66. 200W.

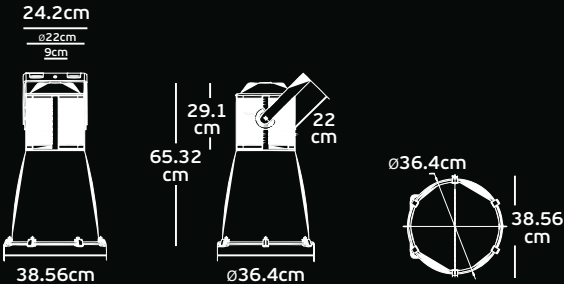





VK/04451/95



VK/04451/120

VK/04451

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Diameter	Box
75169-093721	VK/04451/B/W/95	■ Black sand	3000K	20W	1.200lm	45°	CRI>90	ø9.5cm	20pcs
75169-094721	VK/04451/W/W/95	□ White sand	3000K	20W	1.200lm	45°	CRI>90	ø9.5cm	20pcs
75169-095721	VK/04451/B/W/120	■ Black sand	3000K	29W	2.281lm	50°	CRI>90	ø12cm	20pcs
75169-096721	VK/04451/W/W/120	□ White sand	3000K	29W	2.281lm	50°	CRI>90	ø12cm	20pcs

Details

20W/30W: Input Voltage AC 220V. Driver: No.


Watt 20W/29W. CRI>90. Type of Led LUMENS COB. Angle 45°, 50°. Dimmable Triac. Lifetime 20.000 hrs. Working temperature -20°C~45°C.

Material Aluminium. Installation Surface-Mounted. 2 years guarantee.



IP54. 20W. 29W.

Outdoor Wall Light LED



VK/02175/WA

 VK/02175/WA



Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
75169-081721	VK/02175/WA/B/W	■ Black sand	3000K	2x2W	37lm	1° +1°	CRI>80	10pcs
75169-082721	VK/02175/WA/B/C	■ Black sand	4000K	2x2W	37lm	1° +1°	CRI>80	10pcs



Details
Input current 220-240VAC 50/60Hz. Driver: 6VDC 700mA 2x3W. Watt 2x2W. CRI>80. Type of Led CREE. Angle 1° + 1°. No Dimmable. Lifetime 20.000 hrs. Working temperature -20°C~45°C. Material Aluminium. Installation Ceiling. 2 years guarantee.

 IP65. 2x2W.







VK/02178



VK/02179



VK/02180

VK/02178, VK/02179 VK/02180


Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Dimensions	Degrees	CRI	Box
75169-108721	VK/02178/B/W	■ Black sand	3000K	1W	-lm	ø5.8x3cm	-	CRI>90	50pcs
75169-109721	VK/02178/W/W	□ White sand	3000K	1W	-lm	ø5.8x3cm	-	CRI>90	50pcs
75169-110721	VK/02179/B/W	■ Black sand	3000K	1W	-lm	5.6x5.6x3cm	-	CRI>90	50pcs
75169-111721	VK/02179/W/W	□ White sand	3000K	1W	-lm	5.6x5.6x3cm	-	CRI>90	50pcs
75169-112721	VK/02180/B	■ Black sand	-	-	-	ø6.1x5cm	-	-	50pcs

Details

1W: Input current 350mA. Input Voltage DC3V. Watt 1W. CRI>90. Type of Led **OSRAM** SMD with driver. Driver input AC220-240V 50/60Hz output DC 1.8-4V 350mA. Angle -. **No Dimmable**. Lifetime 20.000 hrs. Working temperature -20°C~45°C. Material Aluminium, Plastic (accessoir). Installation **Recessed**. 2 years guarantee.






VK/02174

VK/02174		Product Models						
Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
75169-075721	VK/02174/W/W	□ White sand	3000K	2W	170lm	15°	CRI>80	50pcs
75169-076721	VK/02174/W/C	□ White sand	4000K	2W	170lm	15°	CRI>80	50pcs
75169-077721	VK/02174/B/W	■ Black sand	3000K	2W	170lm	15°	CRI>80	50pcs
75169-078721	VK/02174/B/C	■ Black sand	4000K	2W	170lm	15°	CRI>80	50pcs
75169-079721	VK/02174/BR/W	■ Brown	3000K	2W	170lm	15°	CRI>80	50pcs
75169-080721	VK/02174/BR/C	■ Brown	4000K	2W	170lm	15°	CRI>80	50pcs

Details
Input current 24VDC 50/60Hz. Driver: 3VDC 700mA 2W. Watt 2W. CRI>80. Type of Led CREE SMD. Angle 15°. No Dimmable. Lifetime 20.000 hrs.
Working temperature -20°C~45°C. Material Aluminium. Installation Ground. 2 years guarantee.





VK/02181

VK/02181

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
75169-113721	VK/02181/W/W	□ White sand	3000K	7W	228lm	120°	CRI>80	6pcs
75169-114721	VK/02181/W/C	□ White sand	4000K	7W	228lm	120°	CRI>80	6pcs
75169-115721	VK/02181/B/W	■ Black sand	3000K	7W	228lm	120°	CRI>80	6pcs
75169-116721	VK/02181/B/C	■ Black sand	4000K	7W	228lm	120°	CRI>80	6pcs
75169-117721	VK/02181/G/W	■ Grey	3000K	7W	228lm	120°	CRI>80	6pcs
75169-118721	VK/02181/G/C	■ Grey	4000K	7W	228lm	120°	CRI>80	6pcs
75169-119721	VK/02181/BR/W	■ Brown	3000K	7W	228lm	120°	CRI>80	6pcs
75169-120721	VK/02181/BR/C	■ Brown	4000K	7W	228lm	120°	CRI>80	6pcs

Details
7W: Input current 220-240VAC 50/60Hz Output DC300mA 18V. Driver: Built-in. Watt 7W. CRI>80. Type of Led Edison. Angle 120°. No Dimmable. Lifetime 20.000 hrs. Working temperature -20°C~45°C. Material Aluminium. Installation Ground. 3 years guarantee.





VK/02173

VK/02173

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
75169-067721	VK/02173/W/W	□ White sand	3000K	7.2W	228lm	120°	CRI>80	6pcs
75169-068721	VK/02173/W/C	□ White sand	4000K	7.2W	228lm	120°	CRI>80	6pcs
75169-069721	VK/02173/B/W	■ Black sand	3000K	7.2W	228lm	120°	CRI>80	6pcs
75169-070721	VK/02173/B/C	■ Black sand	4000K	7.2W	228lm	120°	CRI>80	6pcs
75169-071721	VK/02173/G/W	■ Grey	3000K	7.2W	228lm	120°	CRI>80	6pcs
75169-072721	VK/02173/G/C	■ Grey	4000K	7.2W	228lm	120°	CRI>80	6pcs
75169-073721	VK/02173/BR/W	■ Brown	3000K	7.2W	228lm	120°	CRI>80	6pcs
75169-074721	VK/02173/BR/C	■ Brown	4000K	7.2W	228lm	120°	CRI>80	6pcs


Details

7.2W: Input current 100-240VAC 50/60Hz. Driver: 18VDC 300mA 7W. Watt 7.2W. CRI>80. Type of Led Edison. Angle 120°. No Dimmable. Lifetime 20.000 hrs. Working temperature -20°C~45°C. Material Aluminium. Installation Ground. 2 years guarantee.



IP65. 7.2W.






VK/02176

VK/02176		Product Models						
Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
75169-083721	VK/02176/W/W	□ White sand	3000K	2W	37lm	10x180°	CRI>80	12pcs
75169-084721	VK/02176/W/C	□ White sand	4000K	2W	37lm	10x180°	CRI>80	12pcs
75169-085721	VK/02176/B/W	■ Black sand	3000K	2W	37lm	10x180°	CRI>80	12pcs
75169-086721	VK/02176/B/C	■ Black sand	4000K	2W	37lm	10x180°	CRI>80	12pcs
75169-087721	VK/02176/BR/W	■ Brown	3000K	2W	37lm	10x180°	CRI>80	12pcs
75169-088721	VK/02176/BR/C	■ Brown	4000K	2W	37lm	10x180°	CRI>80	12pcs

Details
Input current 200-240VAC 50/60Hz. Driver: 3VDC 700mA 2W. Watt 2W. CRI>80. Type of Led CREE. Angle 10x180°. No Dimmable. Lifetime 20.000 hrs. Working temperature -20°C~45°C. Material Aluminium. Installation Ceiling/Wall/Ground. 2 years guarantee.





VK/02177

VK/02177

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
75169-089721	VK/02177/W/W	□ White sand	3000K	5W	606lm	38°	CRI>80	50pcs
75169-090721	VK/02177/W/C	□ White sand	4000K	5W	606lm	38°	CRI>80	50pcs
75169-091721	VK/02177/B/W	■ Black sand	3000K	5W	606lm	38°	CRI>80	50pcs
75169-092721	VK/02177/B/C	■ Black sand	4000K	5W	606lm	38°	CRI>80	50pcs


Details

Input current 200-240VAC 50/60Hz. Driver: 200-240VAC 5W. Watt 5W. CRI>80. Type of Led EPISTAR. Angle 38°. No Dimmable. Lifetime 20.000 hrs. Working temperature -20°C~45°C. Material Aluminium. Installation Ceiling/Wall/Ground. 2 years guarantee.




IP65. 5W.






VK/02170/125



VK/02170/137



VK/02170/185

VK/02170

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
75169-129721	VK/02170/B/W/125	■ Black sand	3000K	5W	274lm	38°	CRI>80	20pcs
75169-130721	VK/02170/B/C/125	■ Black sand	4000K	5W	274lm	38°	CRI>80	20pcs
75169-131721	VK/02170/B/W/137	■ Black sand	3000K	9W	563lm	38°	CRI>80	20pcs
75169-132721	VK/02170/B/C/137	■ Black sand	4000K	9W	563lm	38°	CRI>80	20pcs
75169-133721	VK/02170/B/W/185	■ Black sand	3000K	19W	801lm	38°	CRI>80	20pcs
75169-134721	VK/02170/B/C/185	■ Black sand	4000K	19W	801lm	38°	CRI>80	20pcs

Details


5W: Input current 100-240VAC 50/60Hz, Driver: 9VDC 450mA. 9W: Input current 85-265VAC 50/60Hz, Driver: 36VDC 250mA. 19W: Input current 220-240VAC 50/60Hz. Driver: 36VDC 500mA. Watt 5W/9W/19W. CRI>80. Type of Led CREE. Angle 15°/24°/38°/45°/60°. No Dimmable. Lifetime 20.000 hrs. Working temperature -20°C~45°C. Material Aluminium. Installation Ground. 2 years guarantee.




IP65. 5W. 9W. 19W.



Outdoor Ground Light LED



VK/02171



VK/02172

VK/02171
VK/02172

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
75169-135721	VK/02171/B/W/90	■ Black sand	3000K	2W	119lm	30°	CRI>80	24pcs
75169-136721	VK/02171/B/C/90	■ Black sand	4000K	2W	119lm	30°	CRI>80	24pcs
75169-137721	VK/02172/B/W/124	■ Black sand	3000K	3x1W	245lm	25°	CRI>80	12pcs
75169-138721	VK/02172/B/C/124	■ Black sand	4000K	3x1W	245lm	25°	CRI>80	12pcs

Details

2W: Input current **650mA**, Input Voltage **DC 3V**. Driver: **100-240V 50/60Hz**, Output **DC 2.5-4V 650mA**. Watt **2W**. CRI>80. Type of Led **SMD CREE**. Angle **30°**. **No Dimmable**. Lifetime **50.000 hrs**. Working temperature **< 85°C**. Material **Aluminium**. Installation **Ground**. 2 years guarantee.


3x1W: Input current **100-240VAC 50/60Hz**. Driver: **9VDC 350mA**. Watt **3W**. CRI>80. Type of Led **SMD CREE**. Angle **25°**. **No Dimmable**. Lifetime **20.000 hrs**. Working temperature **-20°C~45°C**. Material **Aluminium**. Installation **Ground**. 2 years guarantee.



IP65. 2W. 3x1W.



02 *decorative lighting*



Acrovatis 15 W. 120° 5 W. 24°


/a.kro'va.tis/

The Greek word for Acrobat.

Design & Developed by VK Leading Light




Ceiling Light LED

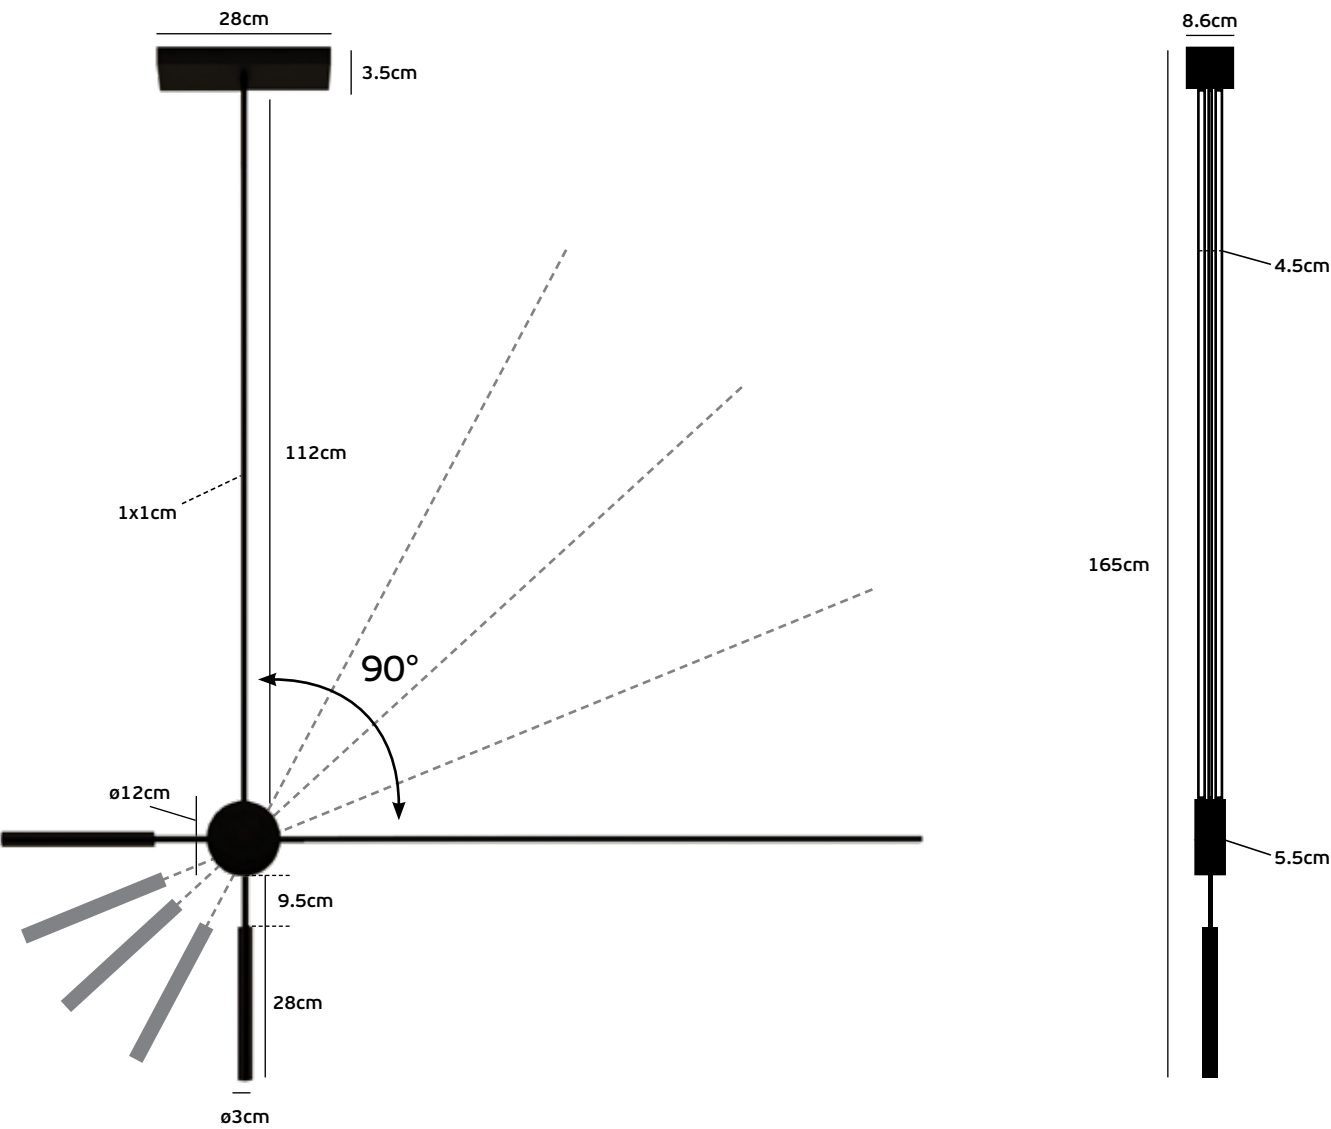


VK/04491/PE								
Product Models								
Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-178721	VK/04491/PE/B/W	■ Black sand	3000K	5W+15W	230lm + 600lm	24°+120°	CRI>90	1pc
71164-179721	VK/04491/PE/B/C	■ Black sand	4000K	5W+15W	230lm + 600lm	24°+120°	CRI>90	1pc

Details
AC220-240V 50/60Hz. Watt 5W+15W. CRI>90. Angle 24°+120°. No Dimmable. Lifetime 20.000 hrs. Working temperature -20°C~45°C.
Material Aluminium. Installation Surface-Mounted.


5 years guarantee  or  IP20. 5W+15W.

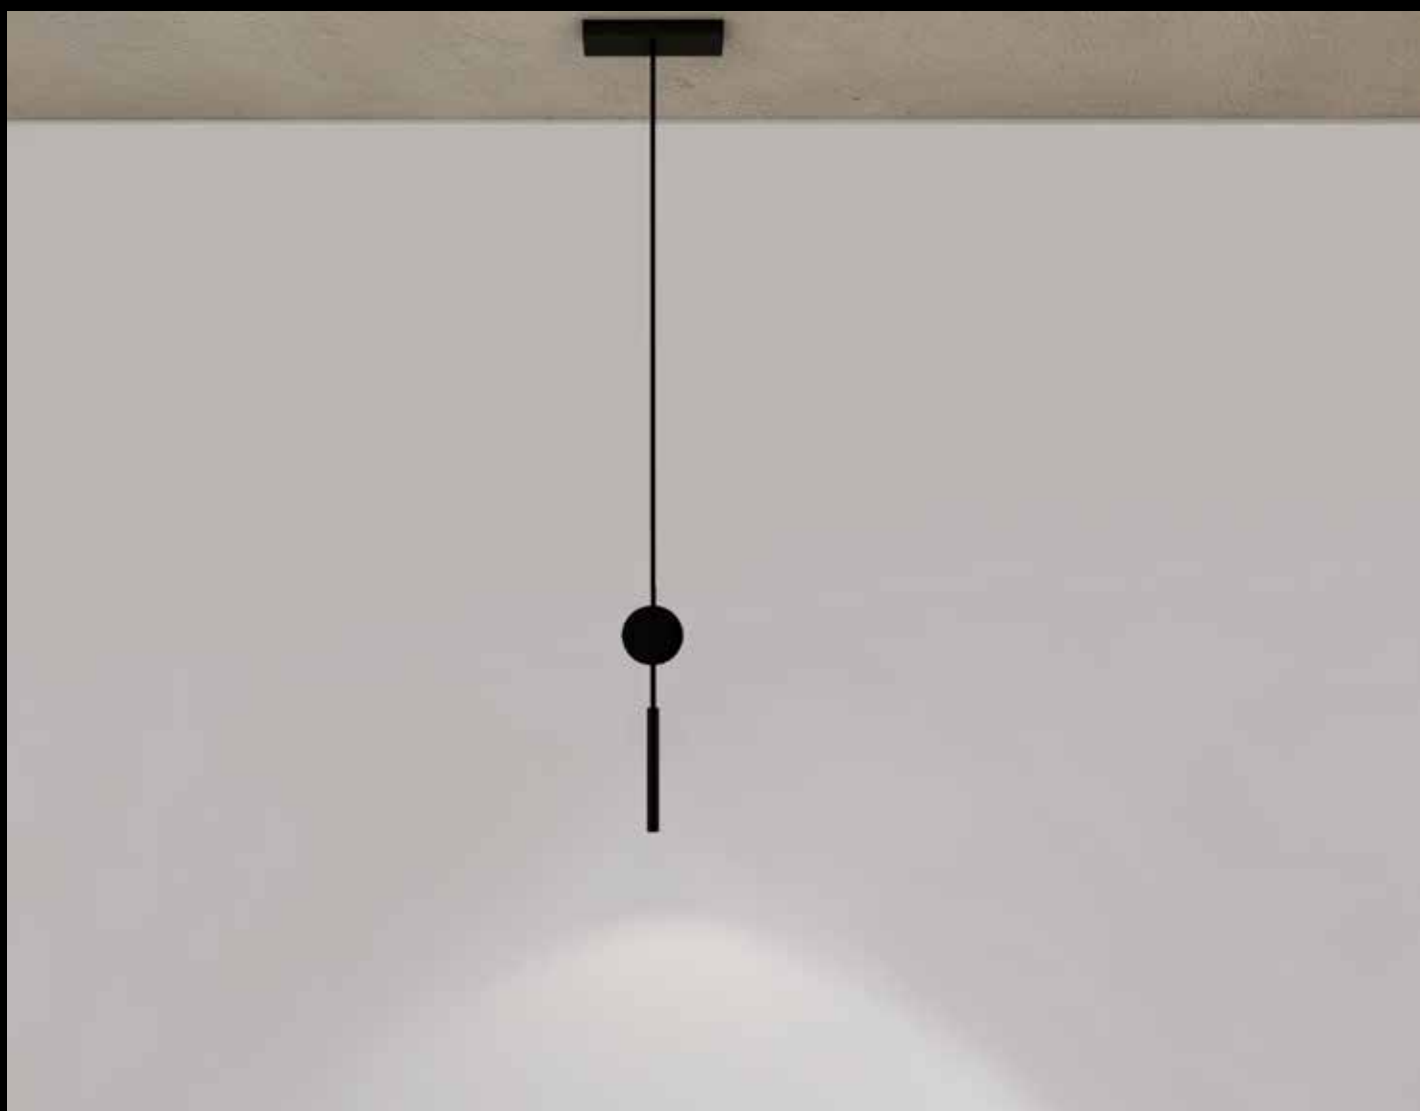


Ceiling Light LED



VK/02169/CE/85



VK/02169/CE/110



VK/02169/CE/185

VK/02169/CE/.../85-185

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Diameter	Box
75169-055721	VK/02169/CE/W/W/85	□ White sand	3000K	4W	200lm	80°	CRI>90	ø8.5cm	30pcs
75169-056721	VK/02169/CE/W/C/85	□ White sand	4000K	4W	200lm	80°	CRI>90	ø8.5cm	30pcs
75169-057721	VK/02169/CE/B/W/85	■ Black sand	3000K	4W	200lm	80°	CRI>90	ø8.5cm	30pcs
75169-058721	VK/02169/CE/B/C/85	■ Black sand	4000K	4W	200lm	80°	CRI>90	ø8.5cm	30pcs
75169-059721	VK/02169/CE/W/W/110	□ White sand	3000K	8W	457lm	80°	CRI>90	ø11cm	18pcs
75169-060721	VK/02169/CE/W/C/110	□ White sand	4000K	8W	457lm	80°	CRI>90	ø11cm	18pcs
75169-061721	VK/02169/CE/B/W/110	■ Black sand	3000K	8W	457lm	80°	CRI>90	ø11cm	18pcs
75169-062721	VK/02169/CE/B/C/110	■ Black sand	4000K	8W	457lm	80°	CRI>90	ø11cm	18pcs
75169-063721	VK/02169/CE/W/W/185	□ White sand	3000K	17W	1290lm	80°	CRI>90	ø18.5cm	12pcs
75169-064721	VK/02169/CE/W/C/185	□ White sand	4000K	17W	1290lm	80°	CRI>90	ø18.5cm	12pcs
75169-065721	VK/02169/CE/B/W/185	■ Black sand	3000K	17W	1290lm	80°	CRI>90	ø18.5cm	12pcs
75169-066721	VK/02169/CE/B/C/185	■ Black sand	4000K	17W	1290lm	80°	CRI>90	ø18.5cm	12pcs

Details

4W: Input current **350mA**, Input Voltage **DC 12V**. Driver: Input AC220-240V 50/60Hz, Output DC 12-21V 350mA.

8W: Input current **250mA**, Input Voltage **DC 36V**. Driver: Input AC220-240V 50/60Hz, Output DC 30-42V 250mA.

17W: Input current **500mA**, Input Voltage **DC 36V**. Driver: Input AC220-240V 50/60Hz, Output DC 27-38V 500mA.

Watt **4W/8W/17W**. CRI>90. Type of Led **bridgeLux SMD with driver**. Angle **80°**. No Dimmable Lifetime **20.000 hrs**. Working temperature **-20°C~45°C**.


Material **Aluminium**. Installation **Surface-Mounted**. 2 years guarantee.



IP44. 4W. 8W. 17W.



Pendant Light LED



VK/04434/PE


 VK/04434/PE

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
75169-127721	VK/04434/PE/B/W	■ Black sand	3000K	2W	125lm	15°/24°	CRI>90	20pcs
75169-128721	VK/04434/PE/W/W	□ White sand	3000K	2W	125lm	15°/24°	CRI>90	20pcs

Details



Input current **700mA**. Input Voltage **DC3V**. Watt **2W**. CRI**>90**. Type of Led **OSRAM SMD with driver**. Driver input **AC220-240V 50/60Hz**. Angle **24°**.
Optional Angle **15°**. **No Dimmable**. Lifetime **20.000 hrs**. Working temperature **-20°C~45°C**. Material **Aluminium**. Installation **Surface-Mounted**. 2 years guarantee.



IP20. 2W.



Pendant Light LED

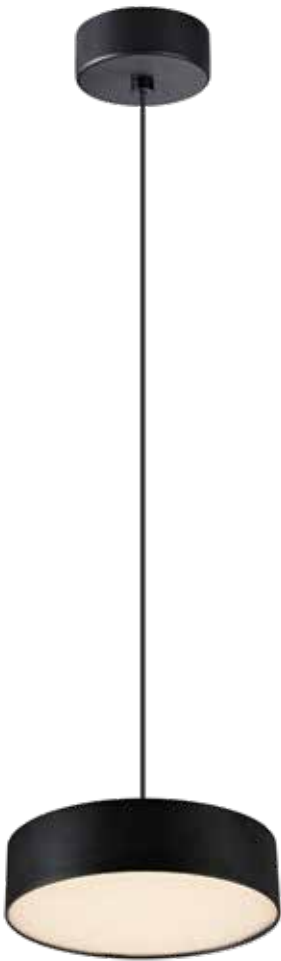

VK/04454/PE


 VK/04454/PE

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
75169-098721	VK/04454/PE/B/W	■ Black sand	3000K	11W	1243lm	120°	CRI>90	20pcs
75169-099721	VK/04454/PE/W/W	□ White sand	3000K	11W	1243lm	120°	CRI>90	20pcs


Details

Input current <500mA. Input Voltage DC24V. Watt 11W. CRI>90. Type of Led bridge  SMD with driver. Driver input AC220-240V 50/60Hz output DC 16-25V 500mA. Angle 120°. No Dimmable. Lifetime 20.000 hrs. Working temperature -20°C~45°C. Material Aluminium. Installation Surface-Mounted. 2 years guarantee.



IP20. 11W.



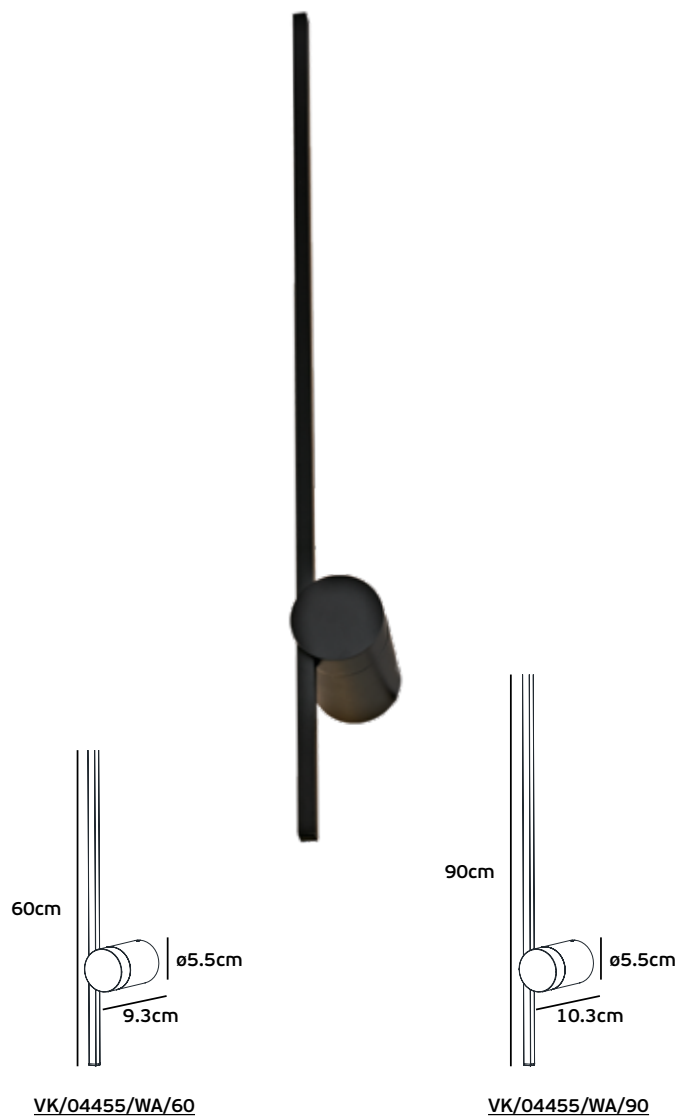


VK/04455/WA										Product Models									
Code	Model	Color	Kelvin	Watt	Lumen	Length	Degrees	CRI	Box	Code	Model	Color	Kelvin	Watt	Lumen	Length	Degrees	CRI	Box
75169-100721	VK/04455/WA/B/W/60	■ Black sand	3000K	5W	-lm	60cm	110°	CRI>90	12pcs	75169-104721	VK/04455/WA/B/W/90	■ Black sand	3000K	8W	-lm	90cm	110°	CRI>90	8pcs
75169-101721	VK/04455/WA/B/C/60	■ Black sand	4000K	5W	-lm	60cm	110°	CRI>90	12pcs	75169-105721	VK/04455/WA/B/C/90	■ Black sand	4000K	8W	-lm	90cm	110°	CRI>90	8pcs
75169-102721	VK/04455/WA/W/W/60	□ White sand	3000K	5W	-lm	60cm	110°	CRI>90	12pcs	75169-106721	VK/04455/WA/W/W/90	□ White sand	3000K	8W	-lm	90cm	110°	CRI>90	8pcs
75169-103721	VK/04455/WA/W/C/60	□ White sand	4000K	5W	-lm	60cm	110°	CRI>90	12pcs	75169-107721	VK/04455/WA/W/C/90	□ White sand	4000K	8W	-lm	90cm	110°	CRI>90	8pcs

Details

5W: Input current **600mA**. Input Voltage **DC9V**. Watt **5W**. CRI**>90**. Type of Led **bridgeLux SMD with driver**. Driver input **AC200-240V 50/60Hz** output **DC 6-10V 600mA**.
8W: Input current **700mA**. Input Voltage **DC12V**. Watt **8W**. CRI**>90**. Type of Led **bridgeLux SMD with driver**. Driver input **AC200-240V 50/60Hz** output **DC 5-12V 700mA**.
Angle **110°**. Rotation angle **350°**. **No Dimmable**. Lifetime **20.000 hrs**. Working temperature **-20°C~45°C**. Material **Aluminium**. Installation **Surface-Mounted**.
2 years guarantee.

  **IP20. 5W. 8W.**

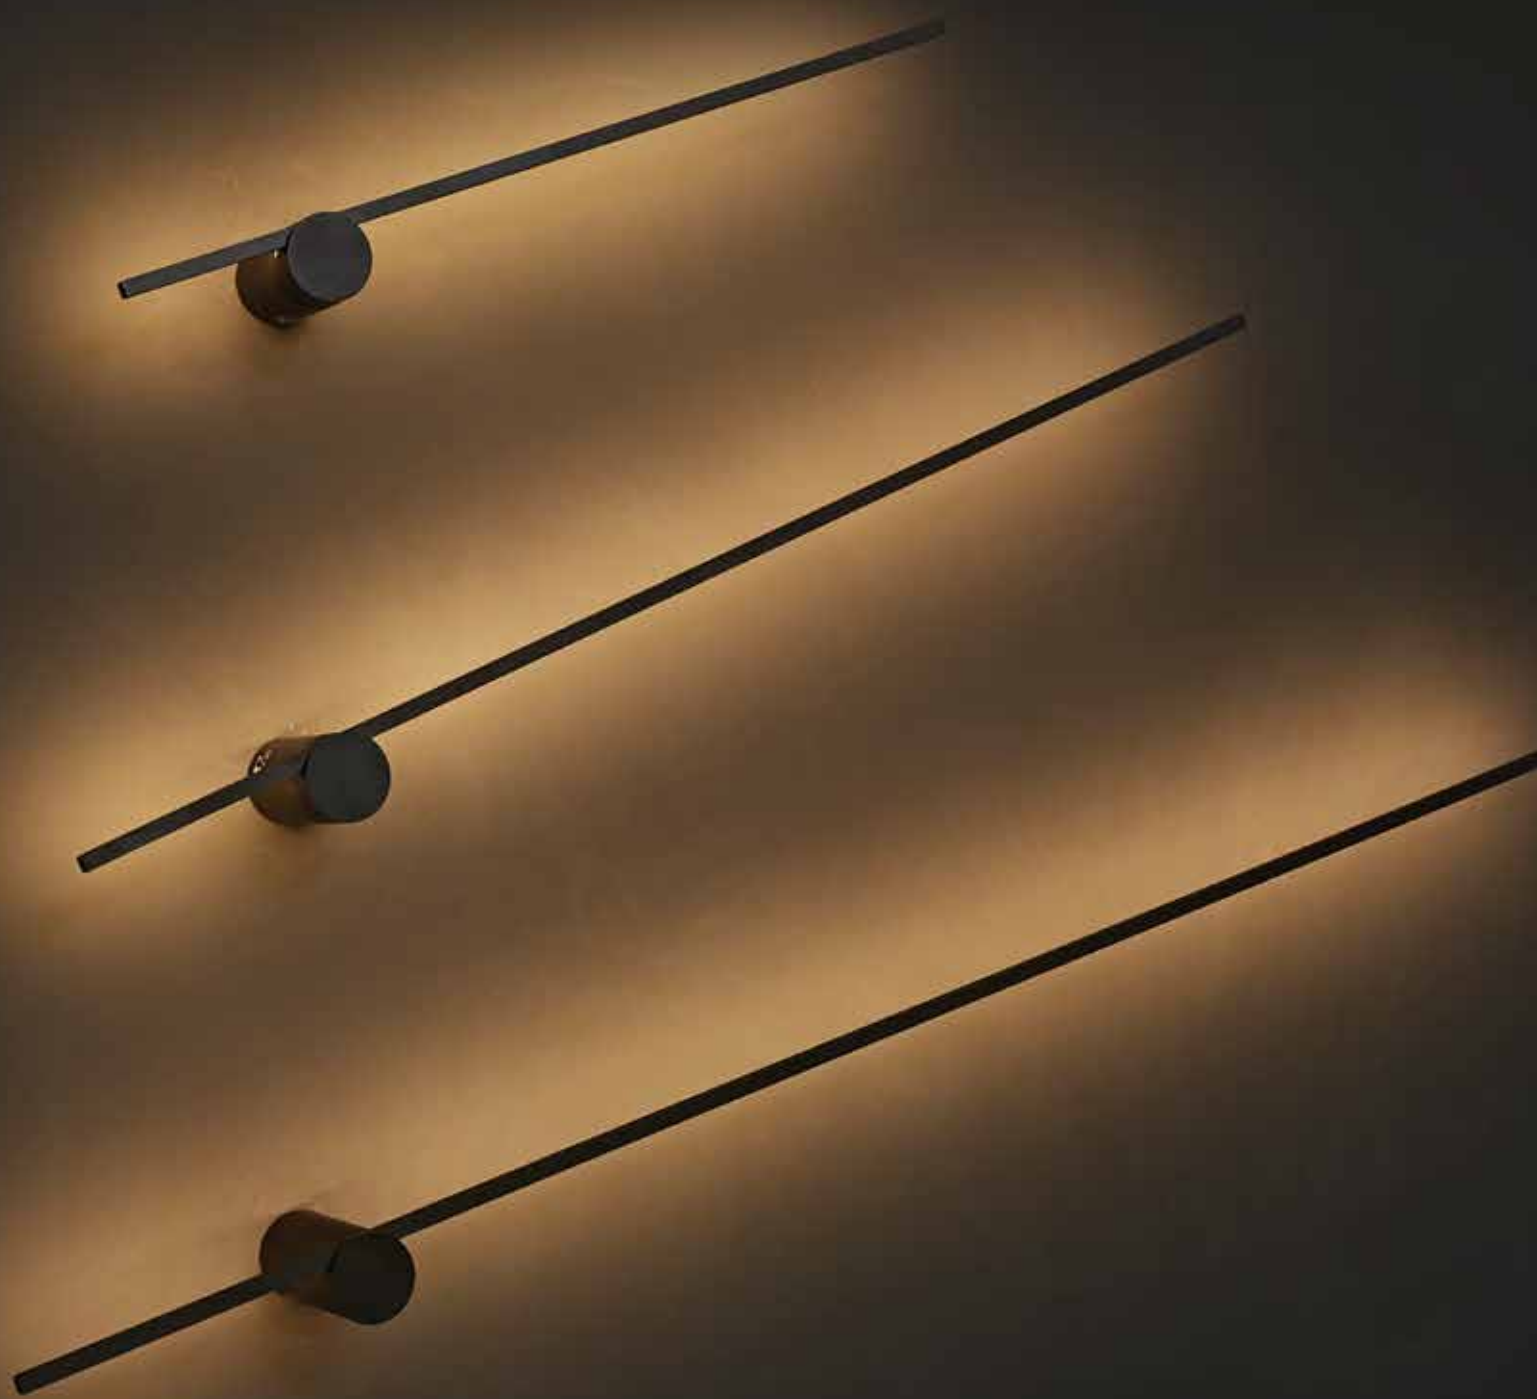


Floor & Table LED



Rotation of the horizontal beam



Connection of the wire

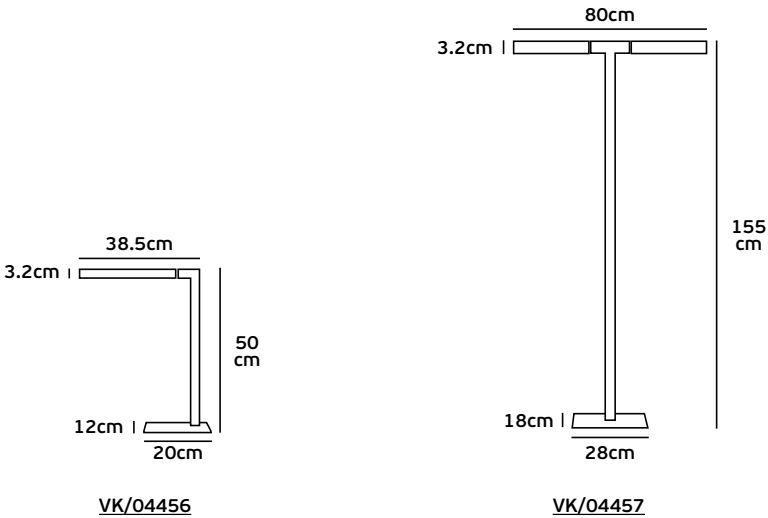

VK/04456
VK/04457

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
75169-121721	VK/04456/B/W	■ Black sand	3000K	12W	129lm	90°	CRI>80	1pc
75169-122721	VK/04457/B/W	■ Black sand	3000K	24W	481lm	180°	CRI>80	1pc


Details

Input current 0.1040mA. Input Voltage DC218.9V. Watt 12W. 24W. CRI>80. Type of Led SMD with driver. Input AC 220-240V 50/60Hz Output DC24V 0.5mA. Angle 120°. Rotation Angle 350°. Dimmable. Lifetime 50.000 hrs. Working temperature < 75°C. Material Metal. 2 years guarantee.




IP20. 12W. 24W.



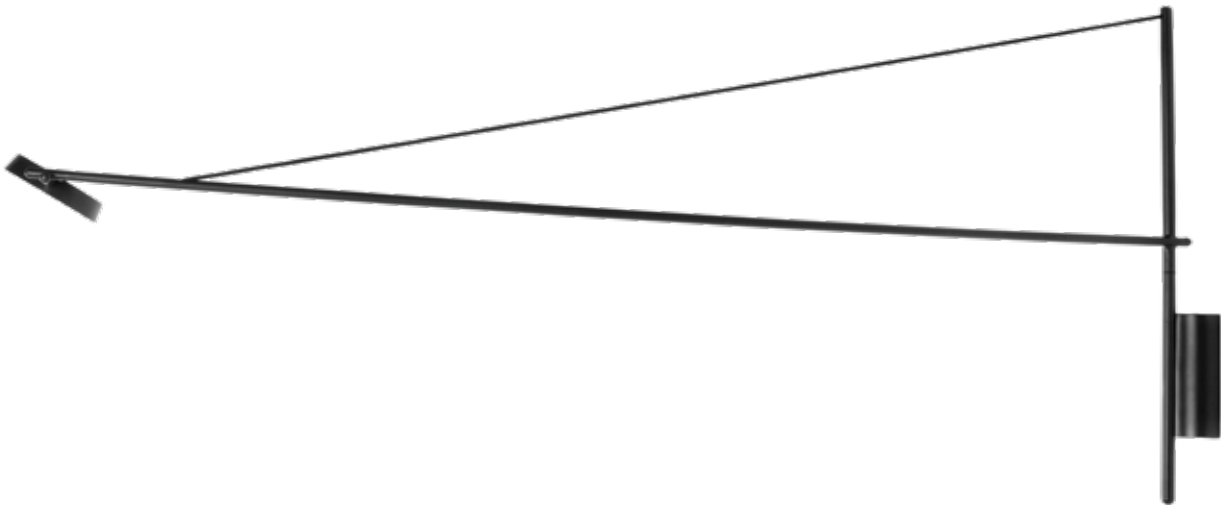

Detail of the LED shade and the signature junction

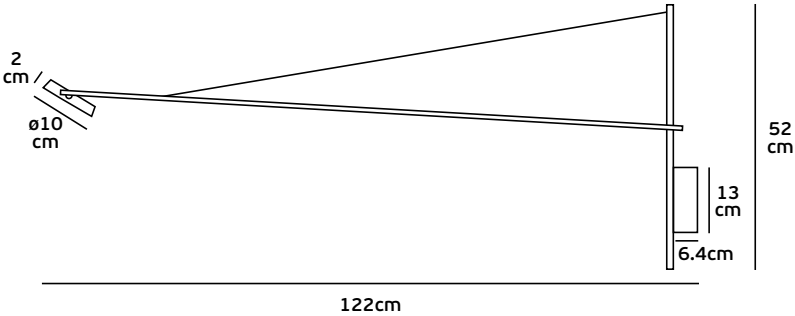

VK/04458

VK/04458								
Product Models								
Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
75169-123721	VK/04458/WA/B/W	■ Black sand	3000K	6W	258lm	95°	CRI>85	1pc

Details
Input current 0.0340mA. Input Voltage DC218.9V. Watt 6W. CRI>80. Type of Led COB with driver. Input AC 220-240V 50/60Hz Output DC20V 0.075mA. Angle 120°. Rotation Angle 350°. Dimmable. Lifetime 50.000 hrs. Working temperature < 75°C. Material Metal. 2 years guarantee.




IP20. 6W.



Table Light LED



Detail of the LED shade and the signature junction



VK/04459

VK/04459								
Product Models								
Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
75169-124721	VK/04459/B/W	■ Black sand	3000K	6W	207lm	95°	CRI>85	1pc

Details

Input current 0.0350mA. Input Voltage DC218.9V. Watt 6W. CRI>85. Type of Led COB with driver. Input AC 220-240V 50/60Hz Output DC12V 0.12mA. Angle 160°. Rotation Angle 350°. Dimmable. Lifetime 50.000 hrs. Working temperature < 75°C. Material Metal. 2 years guarantee.



IP20. 6W.




Floor & Table LIGHTS



Side view of the shade and its ventillation holes



Detail of the metal pull switch

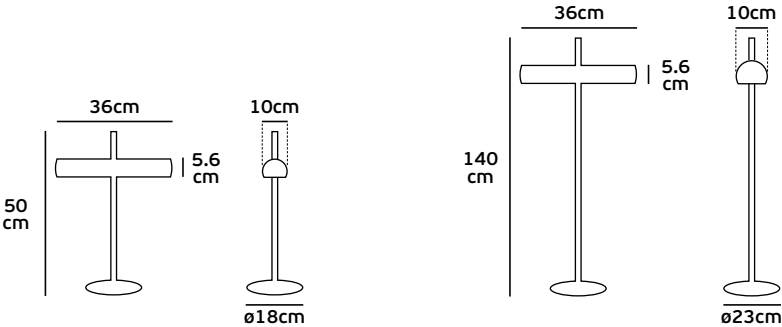

VK/03242

VK/03243

VK/03242
VK/03243

Product Models

Code	Model	Color	Lampholder	Max watt	Box
75169-125721	VK/03242/B	■ Black sand	2xE27	Max 2x40W	8pcs
75169-126721	VK/03243/B	■ Black sand	2xE27	Max 2x40W	8pcs

Details


Voltage 220-240V. Max Watt 40W. Lampholder 2xE27. Working temperature < 45°C. Material Iron. Installation Desk/Floor.
With metal pull switch

IP20. Max 40W. 2xE27.



03 *recessed*

Recessed Ceiling Lights LED

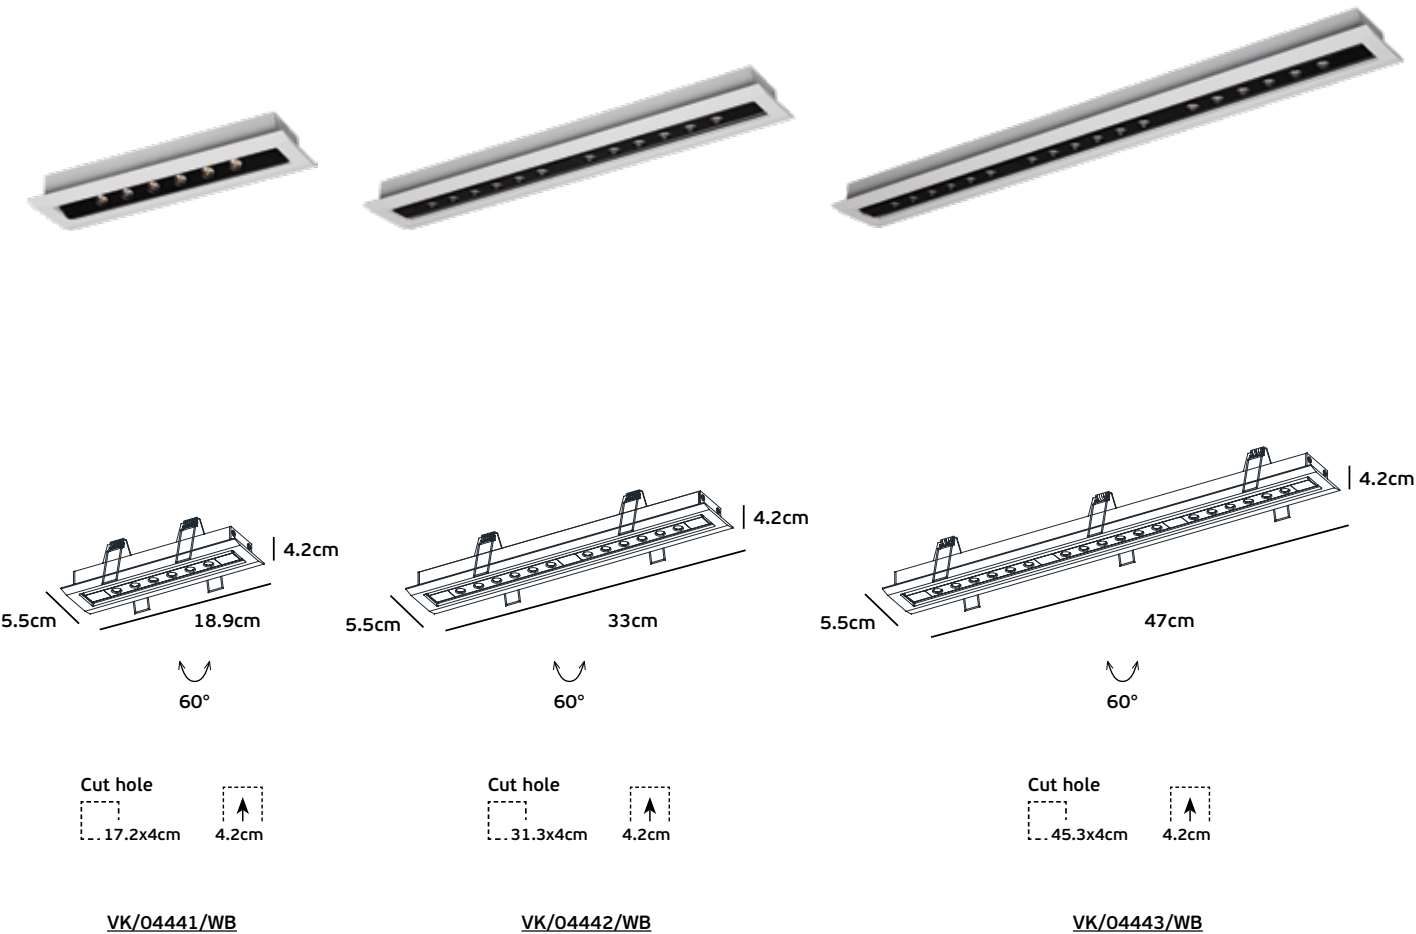

VK/04441, VK/04442, VK/04443									
Product Models									
Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-195721	VK/04441/WB/WW	□ ■ White+Black sand	2700K	6x1W	400lm	24°	CRI>90	18.9x5.5cm	20pcs
64174-196721	VK/04441/WB/W	□ ■ White+Black sand	3000K	6x1W	400lm	24°	CRI>90	18.9x5.5cm	20pcs
64174-197721	VK/04441/WB/C	□ ■ White+Black sand	4000K	6x1W	400lm	24°	CRI>90	18.9x5.5cm	20pcs
64174-198721	VK/04441/B/WW	■ Black sand	2700K	6x1W	400lm	24°	CRI>90	18.9x5.5cm	20pcs
64174-199721	VK/04441/B/W	■ Black sand	3000K	6x1W	400lm	24°	CRI>90	18.9x5.5cm	20pcs
64174-200721	VK/04441/B/C	■ Black sand	4000K	6x1W	400lm	24°	CRI>90	18.9x5.5cm	20pcs
64174-201721	VK/04442/WB/WW	□ ■ White+Black sand	2700K	12x1W	870lm	24°	CRI>90	33x5.5cm	12pcs
64174-202721	VK/04442/WB/W	□ ■ White+Black sand	3000K	12x1W	870lm	24°	CRI>90	33x5.5cm	12pcs
64174-203721	VK/04442/WB/C	□ ■ White+Black sand	4000K	12x1W	870lm	24°	CRI>90	33x5.5cm	12pcs
64174-204721	VK/04442/B/WW	■ Black sand	2700K	12x1W	870lm	24°	CRI>90	33x5.5cm	12pcs
64174-205721	VK/04442/B/W	■ Black sand	3000K	12x1W	870lm	24°	CRI>90	33x5.5cm	12pcs
64174-206721	VK/04442/B/C	■ Black sand	4000K	12x1W	870lm	24°	CRI>90	33x5.5cm	12pcs



Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-207721	VK/04443/WB/WW	□ ■ White+Black sand	2700K	18x1W	1352lm	24°	CRI>90	47x5.5cm	12pcs
64174-208721	VK/04443/WB/W	□ ■ White+Black sand	3000K	18x1W	1352lm	24°	CRI>90	47x5.5cm	12pcs
64174-209721	VK/04443/WB/C	□ ■ White+Black sand	4000K	18x1W	1352lm	24°	CRI>90	47x5.5cm	12pcs
64174-210721	VK/04443/B/WW	■ Black sand	2700K	18x1W	1352lm	24°	CRI>90	47x5.5cm	12pcs
64174-211721	VK/04443/B/W	■ Black sand	3000K	18x1W	1352lm	24°	CRI>90	47x5.5cm	12pcs
64174-212721	VK/04443/B/C	■ Black sand	4000K	18x1W	1352lm	24°	CRI>90	47x5.5cm	12pcs

Details

6x1W: Input current **350mA**, Input Voltage **DC 18V**. Driver: Input **AC220-240V 50/60Hz**, Output **DC 12-22V 350mA**.

12x1W: Input current **350mA**, Input Voltage **DC 36V**. Driver: Input **AC220-240V 50/60Hz**, Output **DC 25-38V 350mA**.

18x1W: Input current **350mA/350mA**, Input Voltage **DC 18V/36V**. Driver: Input **AC220-240V 50/60Hz**, Output **DC 12-22V 350mA**, **DC 25-38V 350mA**.


Watt **6W, 12W, 18W**. CRI>90, CRI>80 (5000K). Type of Led **OSRAM SMD with driver**. Angle 24°. Angle of inclination 60° No Dimmable Lifetime 20.000 hrs.

Working temperature < 45°C. Material **Iron + aluminium**. Installation **Recessed**. 2 years guarantee.




IP20. 6W. 12W. 18W.


Recessed Ceiling Lights LED



VK/04446/WB



VK/04447/WB



VK/04448/WB

VK/04446, VK/04447, VK/04448

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-225721	VK/04446/WB/W	□ ■ White+Black sand	3000K	5W	358lm	30°	CRI>90	ø6.2cm	30pcs
64174-226721	VK/04446/WB/C	□ ■ White+Black sand	4000K	5W	358lm	30°	CRI>90	ø6.2cm	30pcs
64174-227721	VK/04447/WB/W	□ ■ White+Black sand	3000K	5W	358lm	30°	CRI>90	ø9cm	30pcs
64174-228721	VK/04447/WB/C	□ ■ White+Black sand	4000K	5W	358lm	30°	CRI>90	ø9cm	30pcs
64174-229721	VK/04448/WB/W	□ ■ White+Black sand	3000K	11W	744lm	30°	CRI>90	ø16.3cm	12pcs
64174-230721	VK/04448/WB/C	□ ■ White+Black sand	4000K	11W	744lm	30°	CRI>90	ø16.3cm	12pcs

Details

5W: Input current **150mA**, Input Voltage **DC 36V**. Driver: Input **AC200-240V 50/60Hz**, Output **DC 30-45V 150mA**.

11W: Input current **150mA**, Input Voltage **DC 36V**. Driver: Input **AC200-240V 50/60Hz**, Output **DC 30-45V 150mA**.

Watt **5W, 11W**. CRI>90. Type of Led  **COB with driver**. Angle **30°**. Angle of inclination **21°, 30°, 32°**. **No Dimmable** Lifetime **20.000 hrs**.


Working temperature < **45°C**. Material **Aluminium**. Installation **Recessed**. 2 years guarantee.




IP20. 5W. 11W.



Recessed Ceiling Lights LED



VK/04449/WB



VK/04450/WB

VK/04449, VK/04450

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-231721	VK/04449/WB/W	White+Black sand	3000K	5W	363lm	30°	CRI>90	6x6cm	30pcs
64174-232721	VK/04449/WB/C	White+Black sand	4000K	5W	363lm	30°	CRI>90	6x6cm	30pcs
64174-233721	VK/04450/WB/W	White+Black sand	3000K	11W	803lm	30°	CRI>90	12.1x6.7cm	20pcs
64174-234721	VK/04450/WB/C	White+Black sand	4000K	11W	803lm	30°	CRI>90	12.1x6.7cm	20pcs



Details

5W: Input current 150mA, Input Voltage DC 36V. Driver: Input AC200-240V 50/60Hz, Output DC 30-45V 150mA.
11W: Input current 150mA, Input Voltage DC 36V. Driver: Input AC200-240V 50/60Hz, Output DC 30-45V 150mA.
Watt 5W, 11W. CRI>90. Type of Led  COB with driver. Angle 30°. Angle of inclination 21°. No Dimmable Lifetime 20.000 hrs.
Working temperature < 45°C. Material Aluminium. Installation Recessed. 2 years guarantee.



IP20. 5W. 11W.





VK/04429

VK/04429

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-213721	VK/04429/W/WW	□ White sand	2700K	5W	612lm	30°	CRI>90	ø4.2cm	30pcs
64174-159721	VK/04429/W/W	□ White sand	3000K	5W	612lm	30°	CRI>90	ø4.2cm	30pcs
64174-215721	VK/04429/W/C	□ White sand	4000K	5W	612lm	30°	CRI>90	ø4.2cm	30pcs
64174-216721	VK/04429/B/WW	■ Black sand	2700K	5W	612lm	30°	CRI>90	ø4.2cm	30pcs
64174-217721	VK/04429/B/W	■ Black sand	3000K	5W	612lm	30°	CRI>90	ø4.2cm	30pcs
64174-218721	VK/04429/B/C	■ Black sand	4000K	5W	612lm	30°	CRI>90	ø4.2cm	30pcs



Details
Input current **150mA**, Input Voltage **DC 36V**. Driver: Input **AC200-260V 50/60Hz**, Output **DC 30-45V 150mA**.
Watt **5W**. CRI**>90**. Type of Led  **COB with driver**. Angle **30°**. **No Dimmable** Lifetime **20.000 hrs**. Working temperature **< 45°C**.
Material **Aluminium**. Installation **Recessed**. 2 years guarantee. (The cut hole also fits the light driver).





IP20. 5W.



Recessed Ceiling Lights LED



VK/04440



VK/04492

VK/04440
VK/04492

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-189721	VK/04440/W/WW	□ White matt	2700K	1W	65lm	24°	CRI>90	ø4cm	50pcs
64174-190721	VK/04440/W/W	□ White matt	3000K	1W	65lm	24°	CRI>90	ø4cm	50pcs
64174-191721	VK/04440/W/C	□ White matt	4000K	1W	65lm	24°	CRI>90	ø4cm	50pcs
64174-192721	VK/04440/B/WW	■ Black matt	2700K	1W	65lm	24°	CRI>90	ø4cm	50pcs
64174-193721	VK/04440/B/W	■ Black matt	3000K	1W	65lm	24°	CRI>90	ø4cm	50pcs
64174-194721	VK/04440/B/C	■ Black matt	4000K	1W	65lm	24°	CRI>90	ø4cm	50pcs
64174-239721	VK/04492/W/WW	□ White sand	2700K	5W	337lm	12°	CRI>90	ø13.8 (ø4.9)cm	20pcs
64174-240721	VK/04492/W/W	□ White sand	3000K	5W	337lm	12°	CRI>90	ø13.8 (ø4.9)cm	20pcs
64174-241721	VK/04492/W/C	□ White sand	4000K	5W	337lm	12°	CRI>90	ø13.8 (ø4.9)cm	20pcs
64174-242721	VK/04492/B/WW	■ Black sand	2700K	5W	337lm	12°	CRI>90	ø13.8 (ø4.9)cm	20pcs
64174-243721	VK/04492/B/W	■ Black sand	3000K	5W	337lm	12°	CRI>90	ø13.8 (ø4.9)cm	20pcs
64174-244721	VK/04492/B/C	■ Black sand	4000K	5W	337lm	12°	CRI>90	ø13.8 (ø4.9)cm	20pcs

Details

1W: Input current **300mA**, Input Voltage **DC 3V**. Driver: Input **AC100-260V 50/60Hz**, Output **DC 2-4V 300mA**.

CRI>90. Type of Led **OSRAM SMD with driver**. Angle **24°**. **No Dimmable** Lifetime **20.000 hrs**. Working temperature **< 45°C**.

Material **Aluminium**. Installation **Recessed**. 2 years guarantee. (The cut hole also fits the light driver).



5W: Input current **≤500mA**, Input Voltage **DC 9V**. Driver: Input **AC220-240V 50/60Hz**, Output **DC 9-14V 500mA**.

CRI>90. Type of Led **SMD CREE with driver**. Angle **12°**. **No Dimmable** Lifetime **20.000 hrs**. Working temperature **< 45°C**.



Material **Aluminium**. Installation **Recessed**. 2 years guarantee. (The cut hole also fits the light driver).



IP20. 1W. 5W.



VK/04445



VK/04493

VK/04445 VK/04493

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-219721	VK/04445/W/WW	□ White sand	2700K	5W	426lm	30°	CRI>90	ø7.3 (ø3.7)cm	30pcs
64174-220721	VK/04445/W/W	□ White sand	3000K	5W	426lm	30°	CRI>90	ø7.3 (ø3.7)cm	30pcs
64174-221721	VK/04445/W/C	□ White sand	4000K	5W	426lm	30°	CRI>90	ø7.3 (ø3.7)cm	30pcs
64174-222721	VK/04445/B/WW	■ Black sand	2700K	5W	426lm	30°	CRI>90	ø7.3 (ø3.7)cm	30pcs
64174-223721	VK/04445/B/W	■ Black sand	3000K	5W	426lm	30°	CRI>90	ø7.3 (ø3.7)cm	30pcs
64174-224721	VK/04445/B/C	■ Black sand	4000K	5W	426lm	30°	CRI>90	ø7.3 (ø3.7)cm	30pcs
64174-245721	VK/04493/W/WW	□ White sand	2700K	9W	810lm	24°	CRI>90	ø12 (ø5.7)cm	30pcs
64174-246721	VK/04493/W/W	□ White sand	3000K	9W	810lm	24°	CRI>90	ø12 (ø5.7)cm	30pcs
64174-247721	VK/04493/W/C	□ White sand	4000K	9W	810lm	24°	CRI>90	ø12 (ø5.7)cm	30pcs
64174-248721	VK/04493/B/WW	■ Black sand	2700K	9W	810lm	24°	CRI>90	ø12 (ø5.7)cm	30pcs
64174-249721	VK/04493/B/W	■ Black sand	3000K	9W	810lm	24°	CRI>90	ø12 (ø5.7)cm	30pcs
64174-250721	VK/04493/B/C	■ Black sand	4000K	9W	810lm	24°	CRI>90	ø12 (ø5.7)cm	30pcs

Details



5W: Input current 150mA, Input Voltage DC 36V. Driver: Input AC200-260V 50/60Hz, Output DC 30-45V 150mA. CRI>90. Type of Led **bridgeLux**. COB with driver. Angle 30°. No Dimmable Lifetime 20.000 hrs. Working temperature < 45°C. Material **Aluminium**. Installation **Recessed**. 2 years guarantee. (The cut hole also fits the light driver).

9W: Input current 250mA, Input Voltage DC 36V. Driver: Input AC220-240V 50/60Hz, Output DC 30-50V 250mA. CRI>90. Type of Led **bridgeLux**. COB with driver. Angle 24°. No Dimmable Lifetime 20.000 hrs. Working temperature < 45°C. Material **Aluminium**. Installation **Recessed**. 2 years guarantee. (The cut hole also fits the light driver).





IP20. 5W. 9W.



Recessed Ceiling Lights LED





VK/04435/38



VK/04435/68



VK/04435/83



VK/04435/98

VK/04435/...

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Diameter	Box
64174-235721	VK/04435/W/W/38	□ White sand	3000K	2W	220lm	24°	CRI>90	ø3.8cm	50pcs
64174-236721	VK/04435/W/C/38	□ White sand	4000K	2W	220lm	24°	CRI>90	ø3.8cm	50pcs
64174-237721	VK/04435/B/W/38	■ Black sand	3000K	2W	220lm	24°	CRI>90	ø3.8cm	50pcs
64174-238721	VK/04435/B/C/38	■ Black sand	4000K	2W	220lm	24°	CRI>90	ø3.8cm	50pcs
64174-161721	VK/04435/W/W/68	□ White sand	3000K	6W	382lm	24°	CRI>90	ø6.8cm	30pcs
64174-162721	VK/04435/W/C/68	□ White sand	4000K	6W	382lm	24°	CRI>90	ø6.8cm	30pcs
64174-163721	VK/04435/B/W/68	■ Black sand	3000K	6W	382lm	24°	CRI>90	ø6.8cm	30pcs
64174-164721	VK/04435/B/C/68	■ Black sand	4000K	6W	382lm	24°	CRI>90	ø6.8cm	30pcs
64174-165721	VK/04435/W/W/83	□ White sand	3000K	11W	690lm	24°	CRI>90	ø8.3cm	30pcs
64174-166721	VK/04435/W/C/83	□ White sand	4000K	11W	690lm	24°	CRI>90	ø8.3cm	30pcs
64174-167721	VK/04435/B/W/83	■ Black sand	3000K	11W	690lm	24°	CRI>90	ø8.3cm	30pcs
64174-168721	VK/04435/B/C/83	■ Black sand	4000K	11W	690lm	24°	CRI>90	ø8.3cm	30pcs



Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Diameter	Box
64174-169721	VK/04435/W/W/98	□ White sand	3000K	17W	905lm	20°	CRI>90	ø9.8cm	30pcs
64174-170721	VK/04435/W/C/98	□ White sand	4000K	17W	905lm	20°	CRI>90	ø9.8cm	30pcs
64174-171721	VK/04435/B/W/98	■ Black sand	3000K	17W	905lm	20°	CRI>90	ø9.8cm	30pcs
64174-172721	VK/04435/B/C/98	■ Black sand	4000K	17W	905lm	20°	CRI>90	ø9.8cm	30pcs

Details

2W: Input current **700mA**, Input Voltage **DC 3V**. Driver: Input **AC100-240V 50/60Hz**, Output **DC 2-4V 700mA**.

6W: Input current **150mA**, Input Voltage **DC 36V**. Driver: Input **AC220-240V 50/60Hz**, Output **DC 20-42V 150mA**.

11W: Input current **300mA**, Input Voltage **DC 36V**. Driver: Input **AC220-240V 50/60Hz**, Output **DC 25-42V 300mA**.



17W: Input current **450mA**, Input Voltage **DC 36V**. Driver: Input **AC220-240V 50/60Hz**, Output **DC 20-40V 450mA**.

Watt **2W/6W/11W/17W**. CRI>90. Type of Led **bridgeLux**. COB with driver. Angle **24°, 20°**. No Dimmable. Lifetime **20.000 hrs**. Working temperature **< 45°C**. Material **Aluminium**. Installation **Recessed**. 2 years guarantee. (The cut hole also fits the light driver).





IP42. 2W. IP44. 6W. 11W. 17W.



Recessed Ceiling Lights LED





VK/04436/W



VK/04437/W



VK/04438/W



VK/04439/W

VK/04436, VK/04437 VK/04438, VK/04439

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-173721	VK/04436/W/W	□ White matt	3000K	1W	65lm	24°	CRI>90	2.3cm	50pcs
64174-174721	VK/04436/W/C	□ White matt	4000K	1W	65lm	24°	CRI>90	2.3cm	50pcs
64174-175721	VK/04436/B/W	■ Black matt	3000K	1W	65lm	24°	CRI>90	2.3cm	50pcs
64174-176721	VK/04436/B/C	■ Black matt	4000K	1W	65lm	24°	CRI>90	2.3cm	50pcs
64174-177721	VK/04437/W/W	□ White matt	3000K	1W	65lm	24°	CRI>90	2.3x2.3cm	50pcs
64174-178721	VK/04437/W/C	□ White matt	4000K	1W	65lm	24°	CRI>90	2.3x2.3cm	50pcs
64174-179721	VK/04437/B/W	■ Black matt	3000K	1W	65lm	24°	CRI>90	2.3x2.3cm	50pcs
64174-180721	VK/04437/B/C	■ Black matt	4000K	1W	65lm	24°	CRI>90	2.3x2.3cm	50pcs
64174-181721	VK/04438/W/W	□ White matt	3000K	1W	65lm	24°	CRI>90	2.3cm	50pcs
64174-182721	VK/04438/W/C	□ White matt	4000K	1W	65lm	24°	CRI>90	2.3cm	50pcs
64174-183721	VK/04438/B/W	■ Black matt	3000K	1W	65lm	24°	CRI>90	2.3cm	50pcs
64174-184721	VK/04438/B/C	■ Black matt	4000K	1W	65lm	24°	CRI>90	2.3cm	50pcs



Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Dimensions	Box
64174-185721	VK/04439/W/W	□ White matt	3000K	1W	65lm	24°	CRI>90	2.3x2.3cm	50pcs
64174-186721	VK/04439/W/C	□ White matt	4000K	1W	65lm	24°	CRI>90	2.3x2.3cm	50pcs
64174-187721	VK/04439/B/W	■ Black matt	3000K	1W	65lm	24°	CRI>90	2.3x2.3cm	50pcs
64174-188721	VK/04439/B/C	■ Black matt	4000K	1W	65lm	24°	CRI>90	2.3x2.3cm	50pcs

Details

1W: Input current **300mA**, Input Voltage **DC 3V**. Driver: Input **AC100-260V 50/60Hz**, Output **DC 2-4V 300mA**.

Watt **1W**. CRI>**90**. Type of Led **OSRAM SMD with driver**. Angle **24°**. **No Dimmable** Lifetime **20,000 hrs**. Working temperature **< 45°C**.

Material **Aluminium**. Installation **Recessed**. 2 years guarantee. (The cut hole also fits the light driver).



IP20. 1W.



operation
only with





zigbee





magnetic ultra slim 04





VK/04460/DW/6

VK/04460/.../6

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-134721	VK/04460/B/DW/6	■ Black	2700K-6000K	5W	208lm	120°	CRI>90	50pcs
71164-135721	VK/04460/W/DW/6	□ White	2700K-6000K	5W	208lm	120°	CRI>90	50pcs

Details


Input Voltage 40V. Input current 0.133A. Output Voltage 18.8V. Output current 300mA. Watt 5W. CRI>90. Type of Led San'an. Numbers of Led 12. Angle 120°. Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminium. Installation Track. 3 years guarantee. Bluetooth, Zigbee.




IP20. 5W.

operation only with



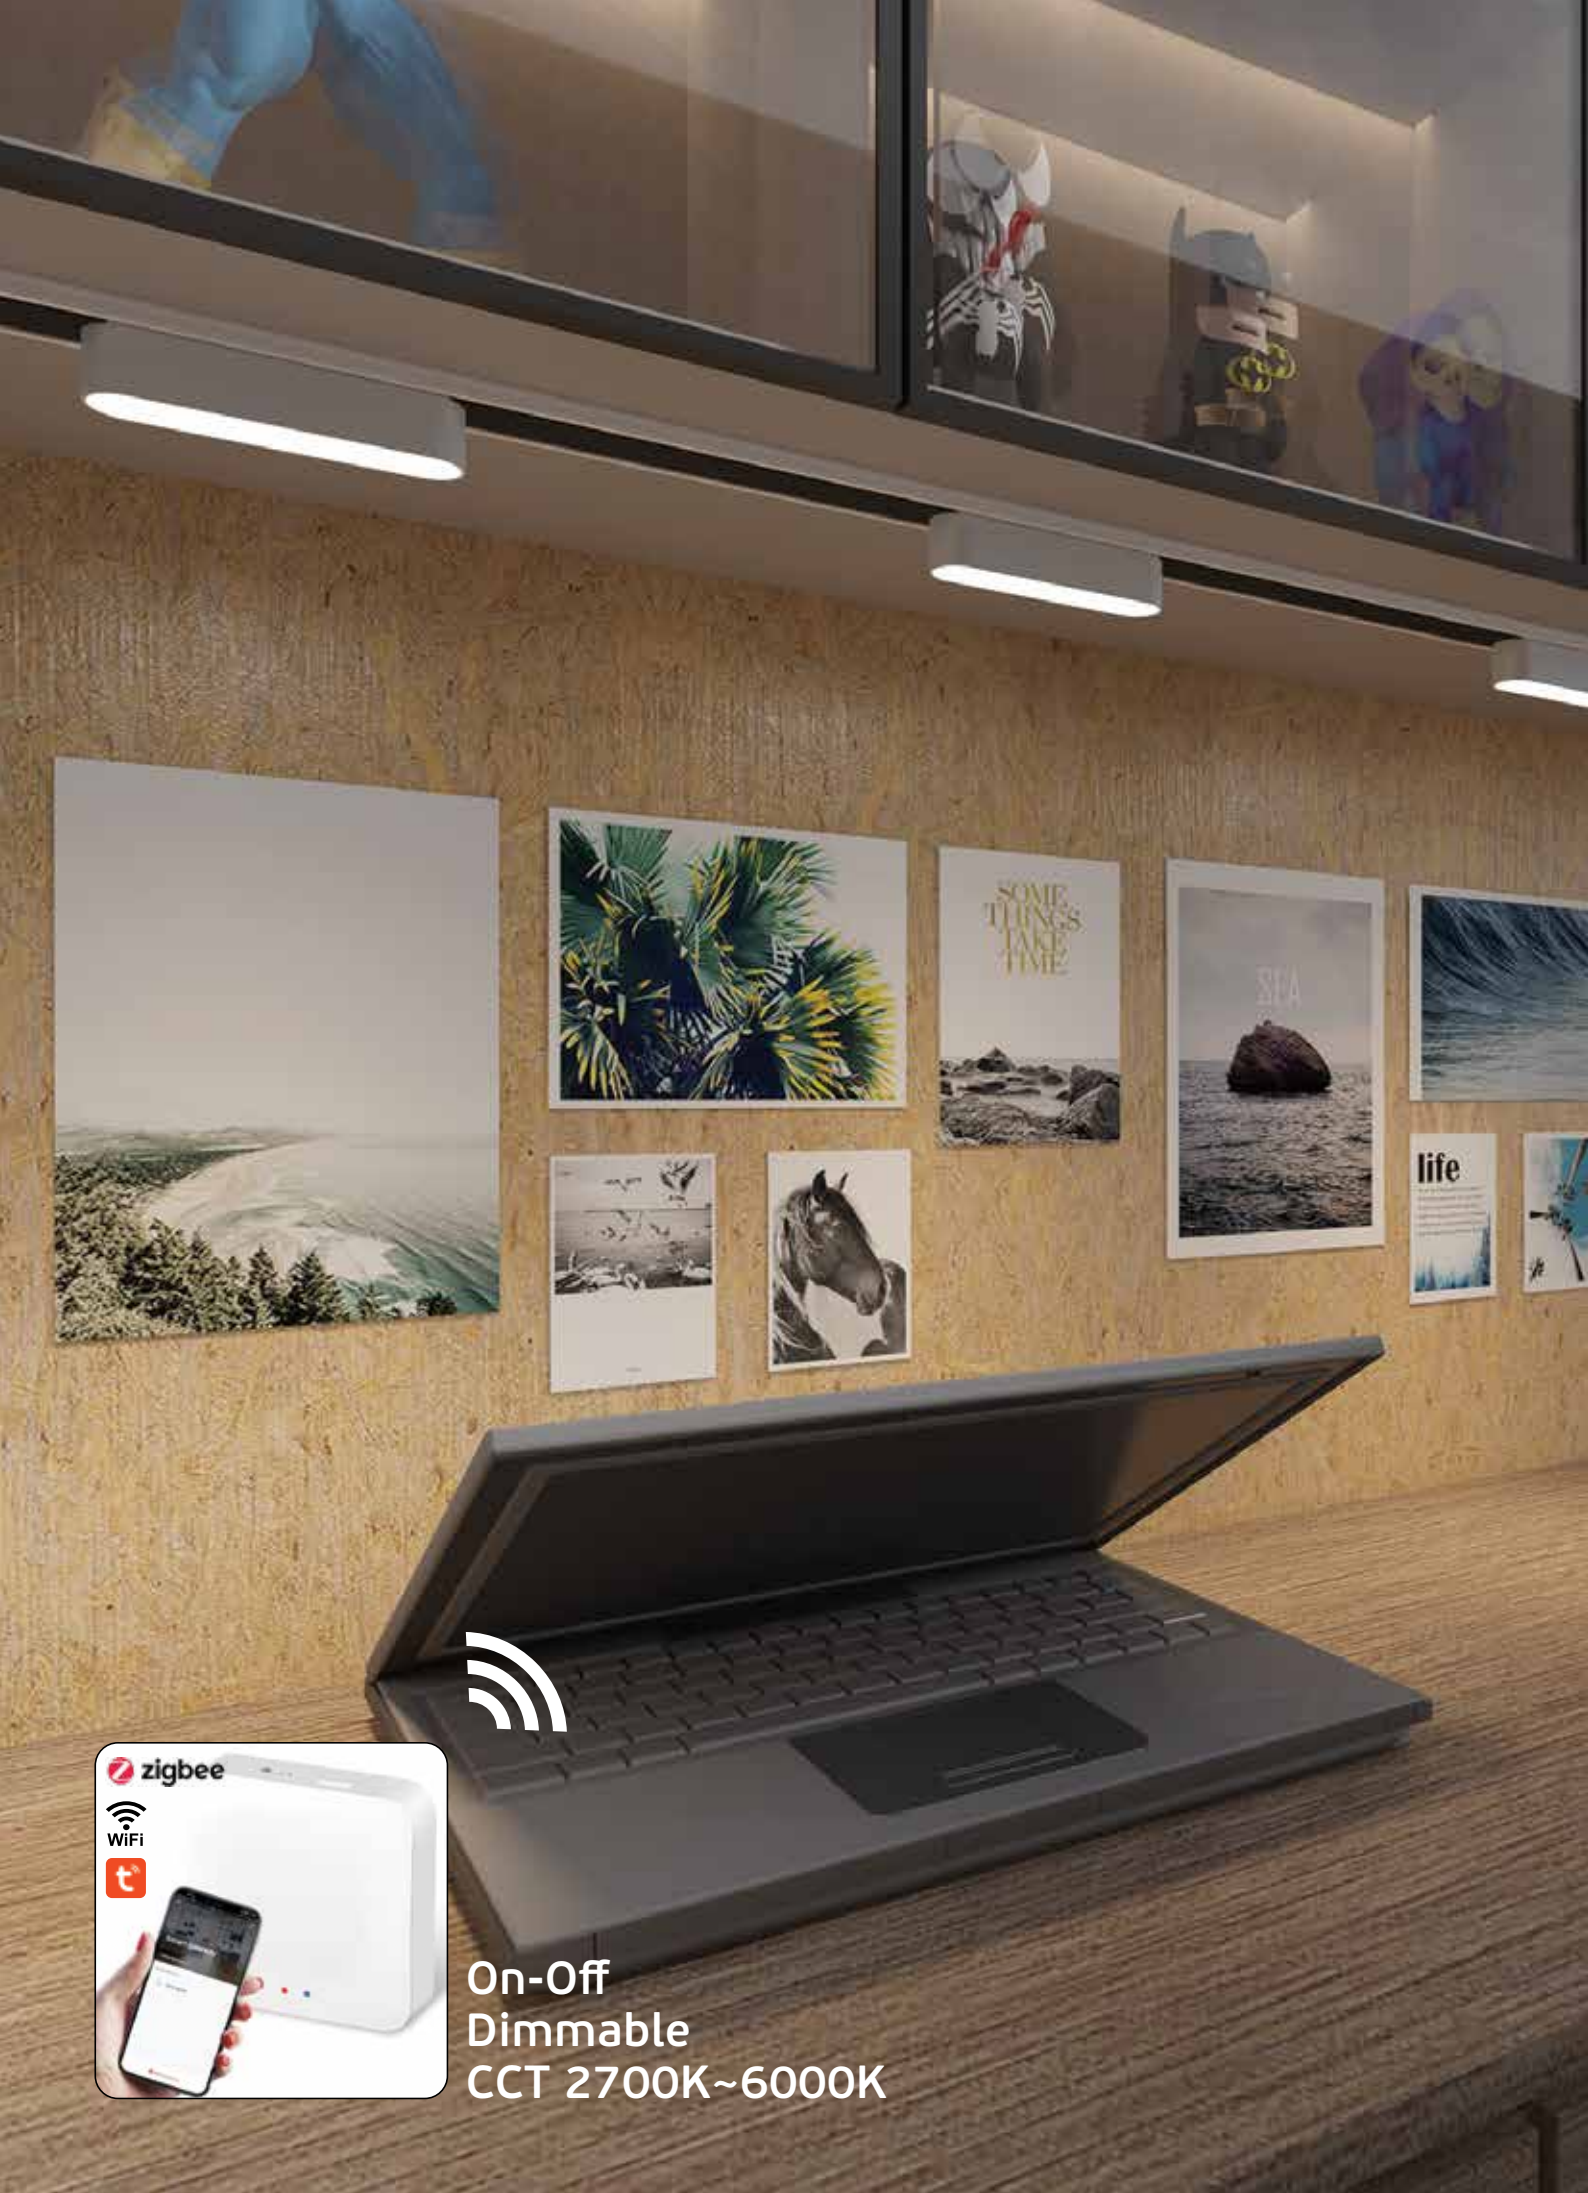

On-Off
Dimmable
CCT 2700K~6000K



VK/04467/DW/6

VK/04467/.../6

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-136721	VK/04467/B/DW/6	■ Black	2700K-6000K	5W	376lm	36°	CRI>90	50pcs
71164-137721	VK/04467/W/DW/6	□ White	2700K-6000K	5W	376lm	36°	CRI>90	50pcs

Details

Input Voltage 40V. Input current 0.128A. Output Voltage 18.8V. Output current 300mA. Watt 5W. CRI>90. Type of Led San'an. Numbers of Led 6. Angle 36°. Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminium. Installation Track. 3 years guarantee. Bluetooth, Zigbee.



IP20. 5W.

operation only with

 WiFi

 android


 iOS

 zigbee

 t



On-Off
Dimmable
CCT 2700K~6000K



VK/04468/DW/6

VK/04468/.../6

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-138721	VK/04468/B/DW/6	■ Black	2700K-6000K	5W	143lm	60°	CRI>90	50pcs
71164-139721	VK/04468/W/DW/6	□ White	2700K-6000K	5W	143lm	60°	CRI>90	50pcs

Details

Input Voltage **40V**. Input current **0.133A**. Output Voltage **189V**. Output current **300mA**. Watt **5W**. CRI>90. Type of Led **San'an**. Numbers of Led **12**. Angle **60°**. **Dimmable**. Lifetime **8000 hrs**. Working temperature < **70°C**. Material **Aluminium**. Installation **Track**. 3 years guarantee. **Bluetooth, Zigbee**.



IP20. 5W.


operation only with





On-Off
Dimmable
CCT 2700K~6000K

Magnetic Track Lights LED



VK/04460/DW/12

VK/04460/.../12

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-140721	VK/04460/B/DW/12	■ Black	2700K-6000K	8W	614lm	120°	CRI>90	50pcs
71164-141721	VK/04460/W/DW/12	□ White	2700K-6000K	8W	614lm	120°	CRI>90	50pcs

Details


Input Voltage 40V. Input current 0.26A. Output Voltage 37.8V. Output current 300mA. Watt 8W. CRI>90. Type of Led San'an. Numbers of Led 24. Angle 120°. Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminium. Installation Track. 3 years guarantee. Bluetooth, Zigbee.





IP20. 8W.

operation only with



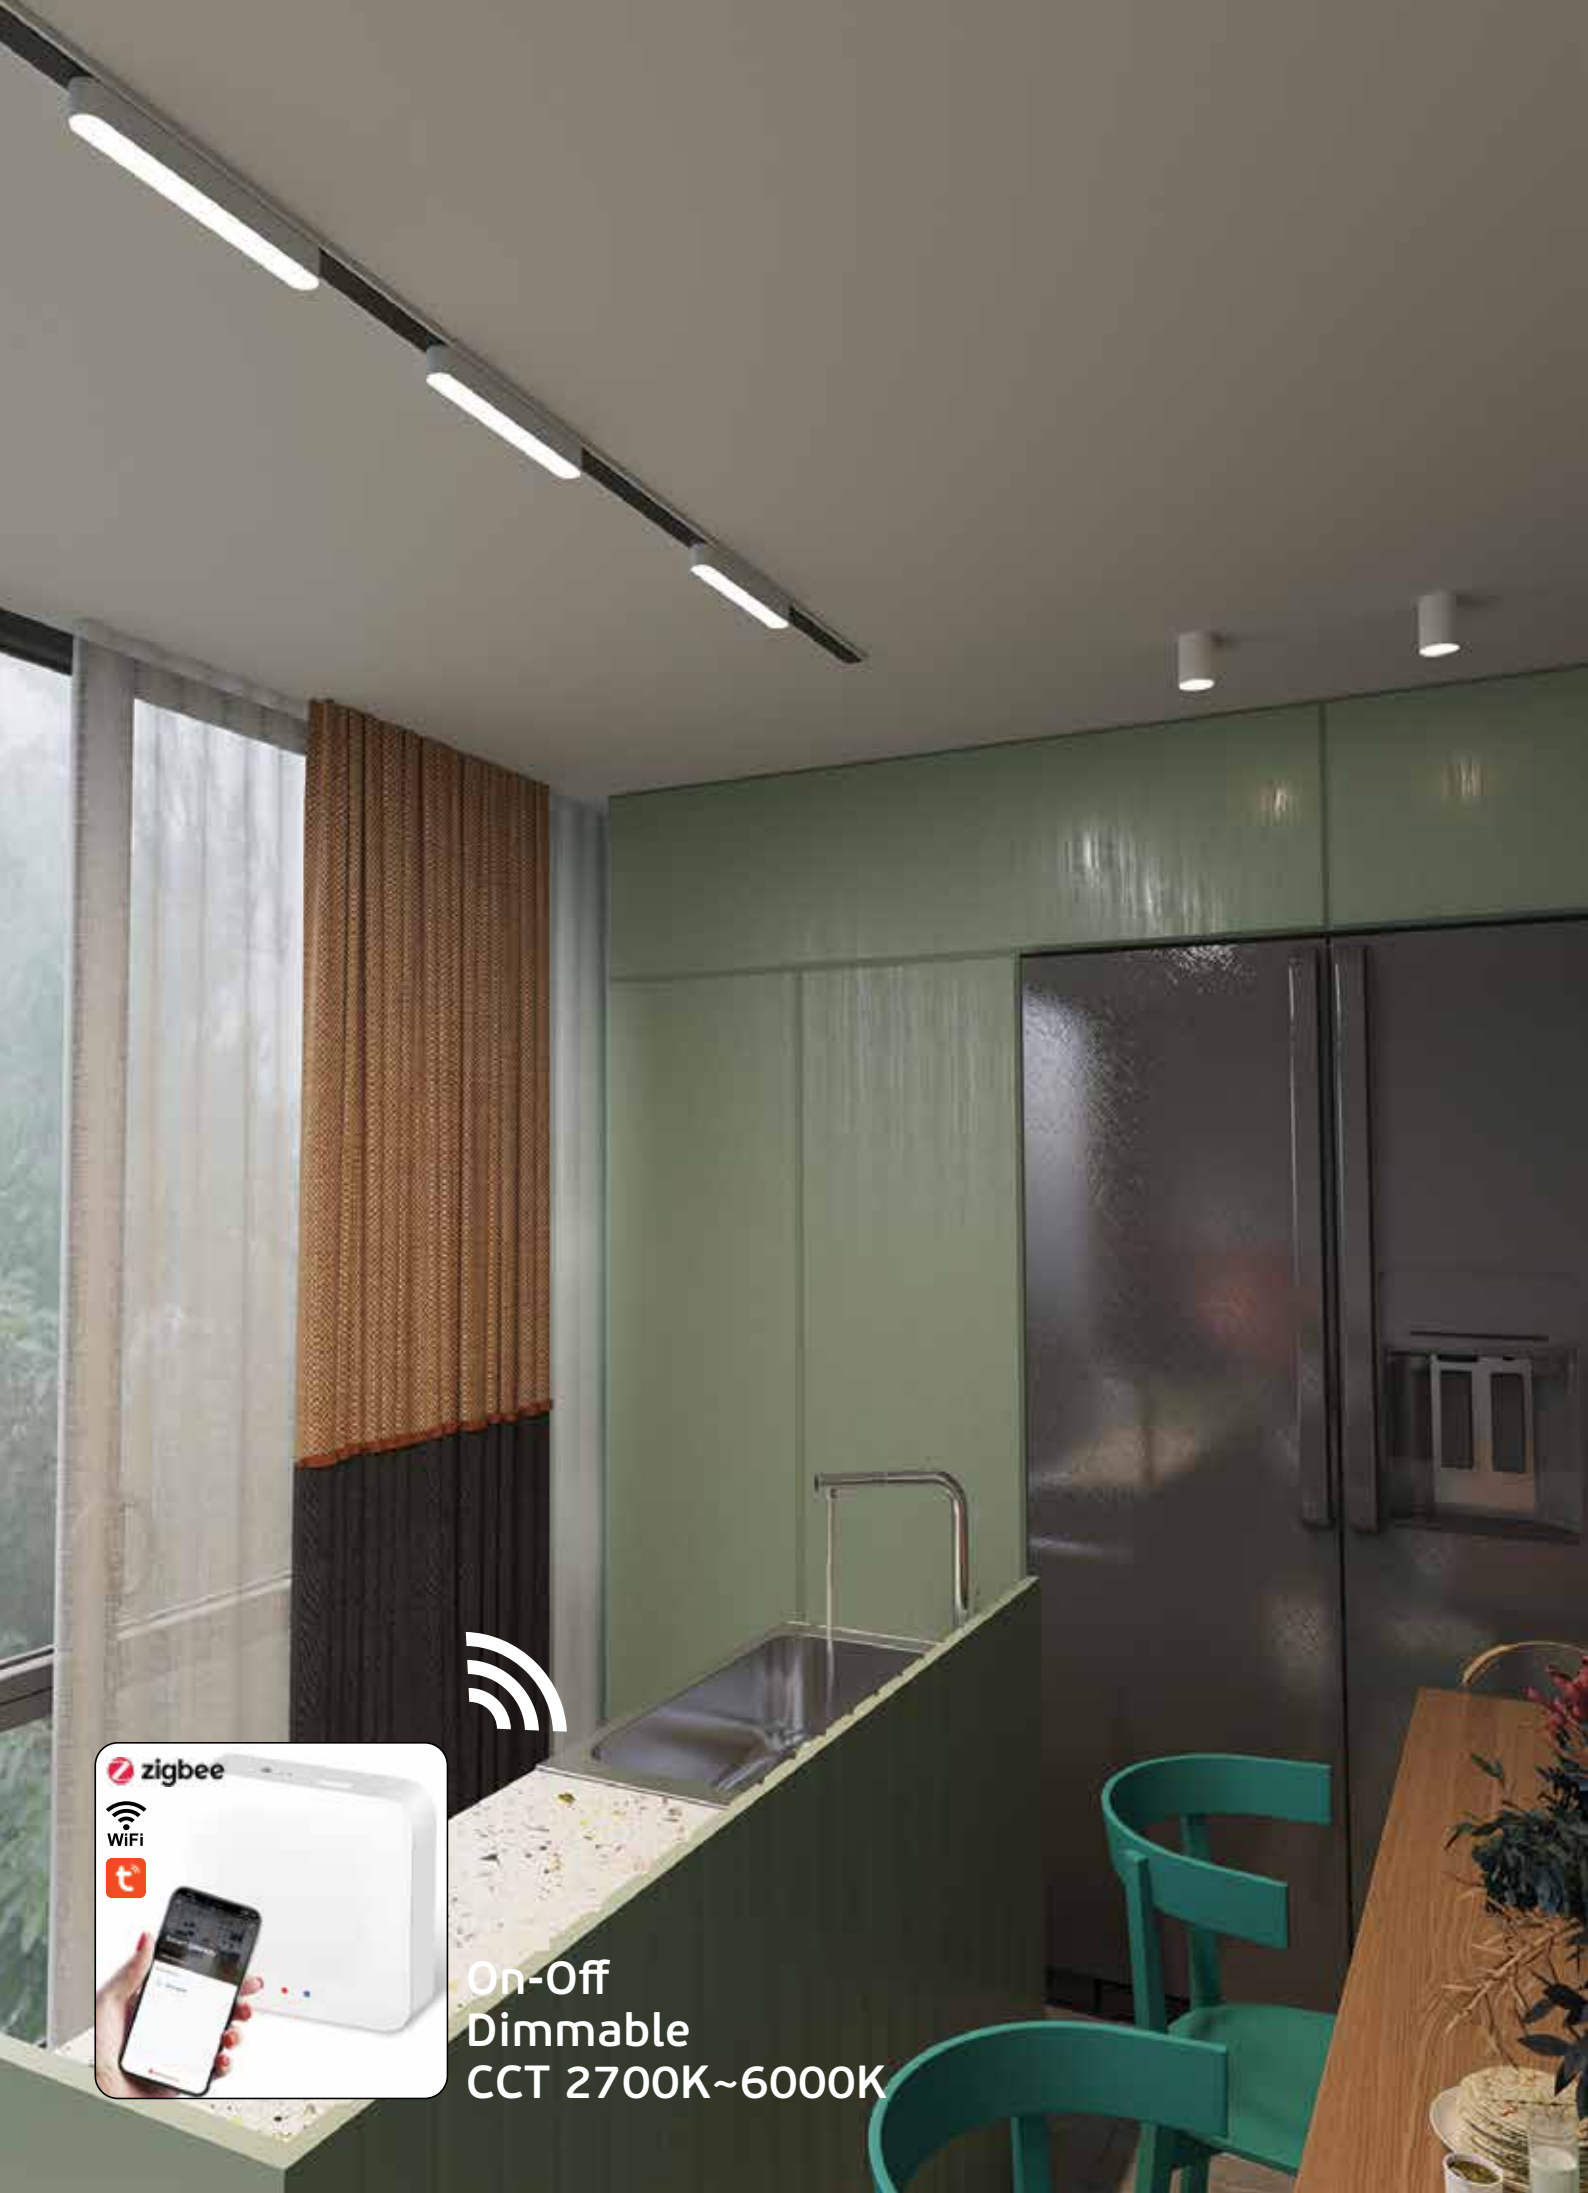

On-Off
Dimmable
CCT 2700K~6000K

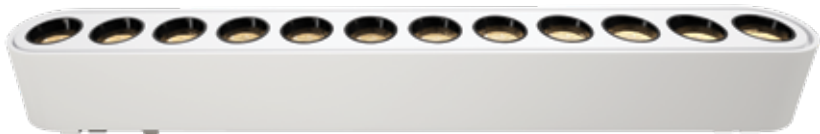

VK/04467/DW/12

VK/04467/.../12

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-142721	VK/04467/B/DW/12	■ Black	2700K-6000K	8W	626lm	36°	CRI>90	50pcs
71164-143721	VK/04467/W/DW/12	□ White	2700K-6000K	8W	626lm	36°	CRI>90	50pcs

Details

Input Voltage 40V. Input current 0.242A. Output Voltage 35.6V. Output current 300mA. Watt 8W. CRI>90. Type of Led San'an. Numbers of Led 12. Angle 36°. Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminium. Installation Track. 3 years guarantee. Bluetooth, Zigbee.




IP20. 8W.

operation only with



On-Off
Dimmable
CCT 2700K~6000K



VK/04468/DW/12

VK/04468/.../12

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-144721	VK/04468/B/DW/12	■ Black	2700K-6000K	8W	342lm	60°	CRI>90	50pcs
71164-145721	VK/04468/W/DW/12	□ White	2700K-6000K	8W	342lm	60°	CRI>90	50pcs

Details

Input Voltage 40V. Input current 0.26A. Output Voltage 37.6V. Output current 300mA. Watt 8W. CRI>90. Type of Led San'an. Numbers of Led 24. Angle 60°. Dimmable. Lifetime 8000 hrs. Working temperature < 70°C. Material Aluminium. Installation Track. 3 years guarantee. Bluetooth, Zigbee.



IP20. 8W.

operation only with


 WiFi

 Android


 iOS



 zigbee

 t

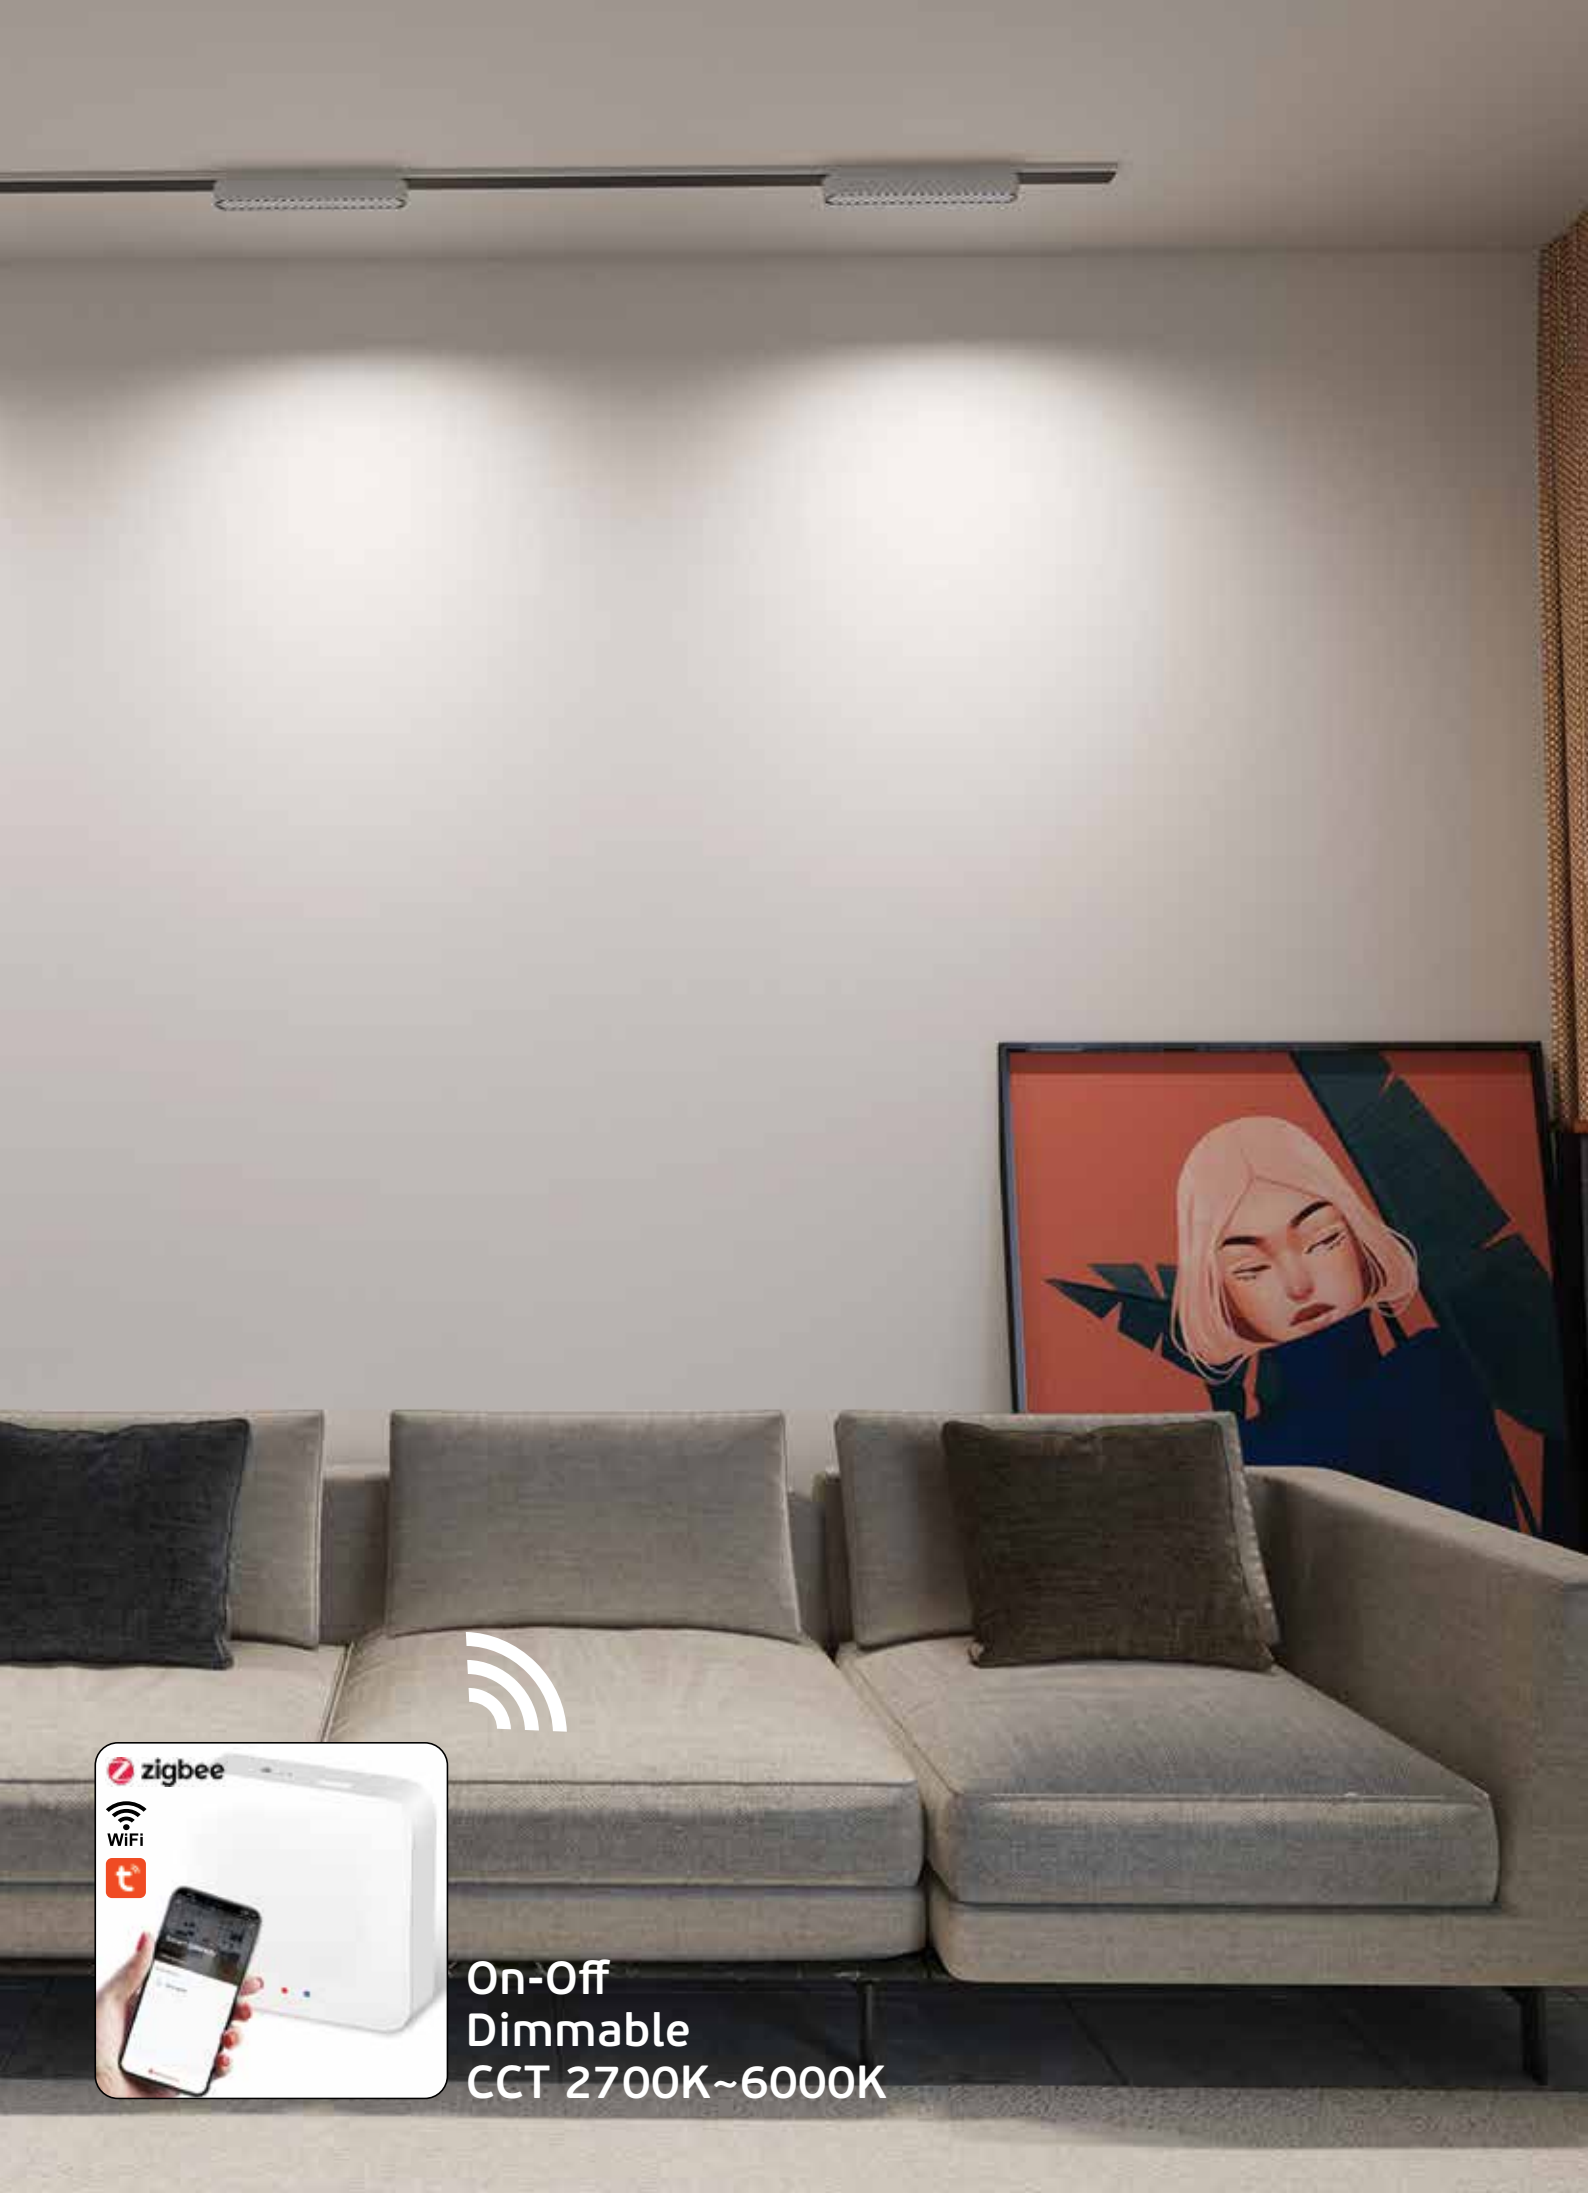


On-Off
Dimmable
CCT 2700K~6000K

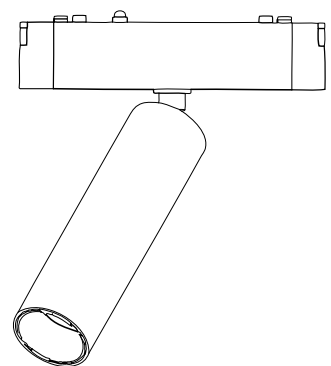


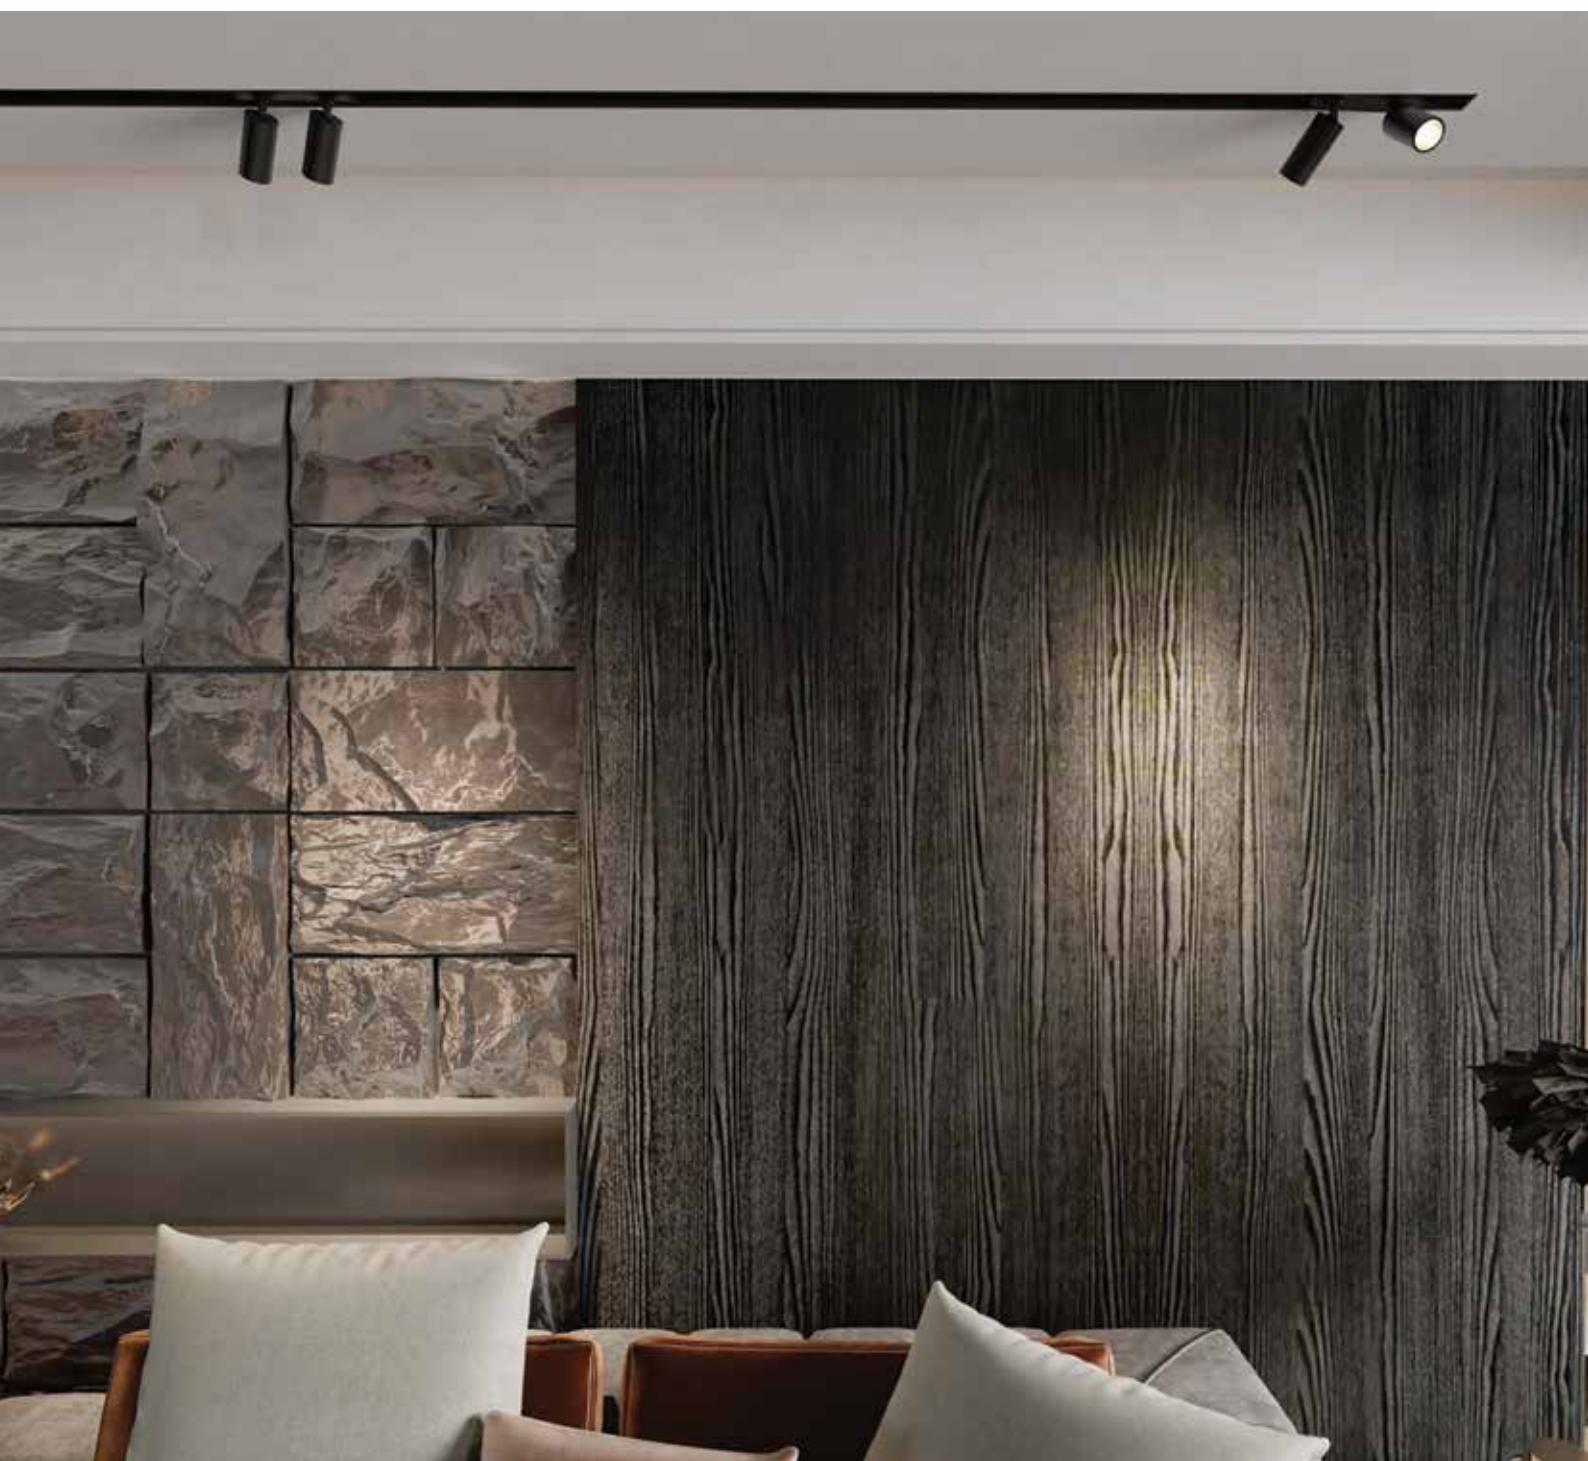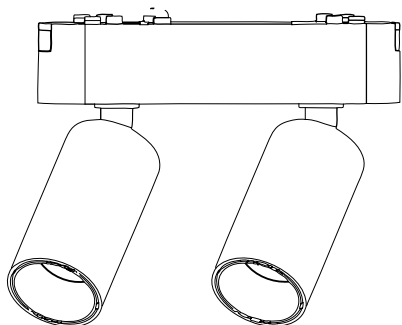

Magnetic Track Lights LED



VK/04469/TR/DW/S



VK/04469/TR/DW/S/2

VK/04469/.../S

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-146721	VK/04469/TR/B/DW/S	■ Black	2700K-6000K	4W	234lm	24°	CRI>90	30pcs
71164-147721	VK/04469/TR/W/DW/S	□ White	2700K-6000K	4W	234lm	24°	CRI>90	30pcs
71164-148721	VK/04469/TR/B/DW/S/2	■ Black	2700K-6000K	2x4W	518lm	24°	CRI>90	30pcs
71164-149721	VK/04469/TR/W/DW/S/2	□ White	2700K-6000K	2x4W	518lm	24°	CRI>90	30pcs

Details

Input Voltage **40V**. Input current **0.107/0.2A**. Output Voltage **33.8/33.4V**. Output current **130/250mA**. Watt **4W, 2x4W**. CRI>90. Type of Led **bridgeLux**. Numbers of Led **1/2**. Angle **24°**. Rotation Angle **360°** **Dimmable**. Lifetime **8000 hrs**. Working temperature **< 70°C**. Material **Aluminium**. Installation **Track**. 3 years guarantee. **Bluetooth, Zigbee**.




IP20. 4W. 2x4W.

operation
only with




zigbee





VK/04469/TR/DW/L



VK/04469/TR/DW/L/2

VK/04469/.../L

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-150721	VK/04469/TR/B/DW/L/2	■ Black	2700K-6000K	6W	383lm	24°	CRI>90	30pcs
71164-151721	VK/04469/TR/W/DW/L	□ White	2700K-6000K	6W	383lm	24°	CRI>90	30pcs
71164-152721	VK/04469/TR/B/DW/L/2	■ Black	2700K-6000K	2x6W	705lm	24°	CRI>90	30pcs
71164-153721	VK/04469/TR/W/DW/L/2	□ White	2700K-6000K	2x6W	705lm	24°	CRI>90	30pcs

Details

Input Voltage **40V**. Input current **0.135/0.293A**. Output Voltage **34.8/34.5V**. Output current **170/350mA**. Watt **6W. 2x6W**. CRI>90. Type of Led **bridgeLux**. Numbers of Led **1/2**. Angle **24°**. Rotation Angle **360°** **Dimmable**. Lifetime **8000 hrs**. Working temperature **< 70°C**. Material **Aluminium**. Installation **Track**. 3 years guarantee. **Bluetooth, Zigbee**.




IP20. 6W. 2x6W.


operation
only with

zigbee





VK/04470/TR/DW/S



VK/04470/TR/DW/L

VK/04470

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-154721	VK/04470/TR/B/DW/S	■ Black	2700K-6000K	8W	507lm	24°	CRI>90	30pcs
71164-172721	VK/04470/TR/W/DW/S	□ White	2700K-6000K	8W	507lm	24°	CRI>90	30pcs
71164-155721	VK/04470/TR/B/DW/L	■ Black	2700K-6000K	11W	685lm	24°	CRI>90	30pcs
71164-173721	VK/04470/TR/W/DW/L	□ White	2700K-6000K	11W	685lm	24°	CRI>90	30pcs


Details

Input Voltage **40V**. Input current **0.239/0.322A**. Output Voltage **37/36.1V**. Output current **300/400mA**. Watt **8W. 11W**. CRI>90. Type of Led **bridgeLux**. Numbers of Led **1**. Angle **24°**. Rotation Angle **360° Dimmable**. Lifetime **8000 hrs**. Working temperature **< 70°C**. Material **Aluminium**. Installation **Track**. 3 years guarantee. **Bluetooth, Zigbee**.



IP20. 8W. 11W.





VK/04471/TR/DW

VK/04471

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-156721	VK/04471/TR/B/DW	■ Black	2700K-6000K	14W	906lm	24°	CRI>90	30pcs
71164-157721	VK/04471/TR/W/DW	□ White	2700K-6000K	14W	906lm	24°	CRI>90	30pcs

Details

Input Voltage **40V**. Input current **0.237A**. Output Voltage **35V**. Output current **300mA**. Watt **14W**. CRI>90. Type of Led **bridgeLux**. Numbers of Led **1**. Angle **24°**. Rotation Angle **360°** **Dimmable**. Lifetime **8000 hrs**. Working temperature **< 75°C**. Material **Aluminium**. Installation **Track**. 3 years guarantee. **Bluetooth, Zigbee**.




IP20. 14W.

operation
only with


zigbee



Magnetic Track Lights LED



VK/04472/1R/DW



VK/04472/2R/DW

VK/04472

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-158721	VK/04472/TR/B/DW	■ Black	2700K-6000K	10W	581lm	24°	CRI>90	30pcs
71164-159721	VK/04472/TR/W/DW	□ White	2700K-6000K	10W	581lm	24°	CRI>90	30pcs
71164-160721	VK/04472/TR/B/DW/2	■ Black	2700K-6000K	2x9W	1.218lm	24°	CRI>90	20pcs
71164-161721	VK/04472/TR/W/DW/2	□ White	2700K-6000K	2x9W	1.218lm	24°	CRI>90	20pcs

Details

Input Voltage **40V**. Input current **0.131/0.31A**. Output Voltage **35.2/35.5V**. Output current **300/400mA**. Watt **10W. 2x9W**. CRI>90. Type of Led **bridgeLux**. Numbers of Led **1/2**. Angle **24°**. Rotation Angle **360°** **Dimmable**. Lifetime **8000 hrs**. Working temperature **< 70°C**. Material **Aluminium**. Installation **Track**. 3 years guarantee. **Bluetooth, Zigbee**.




IP20. 10W. 2x9W.

operation
only with




zigbee





VK/04473/CE/DW



VK/04489/CE/DW

VK/04473 VK/04489

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-162721	VK/04473/CE/B/DW	■ Black	2700K-6000K	12W	753lm	24°	CRI>90	20pcs
71164-163721	VK/04473/CE/W/DW	□ White	2700K-6000K	12W	753lm	24°	CRI>90	20pcs
71164-174721	VK/04489/CE/B/DW	■ Black	2700K-6000K	12W	1.002lm	120°	CRI>90	20pcs
71164-175721	VK/04489/CE/W/DW	□ White	2700K-6000K	12W	1.002lm	120°	CRI>90	20pcs

Details

VK/04473/CE: Input Voltage **40V**. Input current **0.243A**. Output Voltage **37V**. Output current **300mA**. Watt **12W**. CRI>90. Type of Led **San'an**. Numbers of Led **1**. Angle **24°**.

VK/04489/CE: Input Voltage **40V**. Input current **0.191A**. Output Voltage **34.5V**. Output current **250mA**. Watt **12W**. CRI>90. Type of Led **San'an**. Numbers of Led **60**. Angle **120°**.

Rotation Angle **360°** Dimmable. Lifetime **8000 hrs**. Working temperature < **60°C**. Material **Aluminium**. Installation **Track**. 3 years guarantee. **Bluetooth, Zigbee**.





IP20. 12W.

operation
only with



zigbee



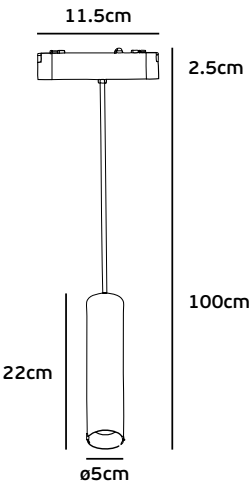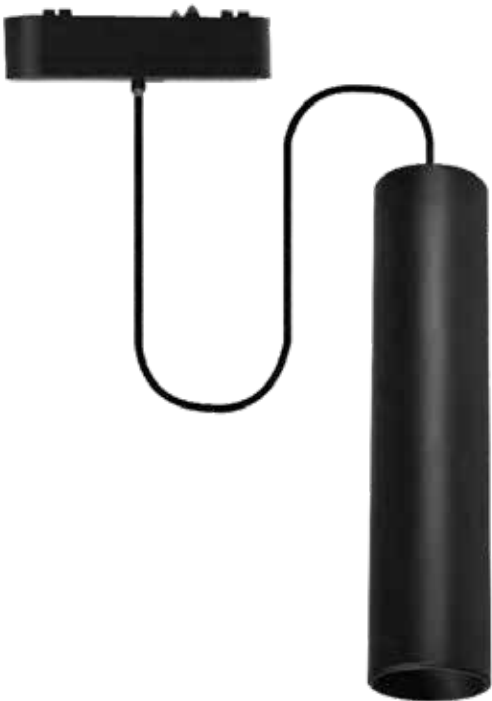

VK/04474/PE/DW

VK/04474

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-166721	VK/04474/PE/B/DW	■ Black	2700K-6000K	11W	678lm	20°	CRI>90	20pcs
71164-167721	VK/04474/PE/W/DW	□ White	2700K-6000K	11W	678lm	20°	CRI>90	20pcs

Details

Input Voltage **40V**. Input current **0.207A**. Output Voltage **36.7V**. Output current **250mA**. Watt **11W**. CRI>**90**. Type of Led **bridgeLux**. Numbers of Led **1**. Angle **20°**. Rotation Angle **360° Dimmable**. Lifetime **8000 hrs**. Working temperature **< 70°C**. Material **Aluminium**. Installation **Track**. 3 years guarantee. **Bluetooth, Zigbee**.



IP20. 11W.

operation only with





On-Off
Dimmable
CCT 2700K~6000K






Base for magnetics lights




+

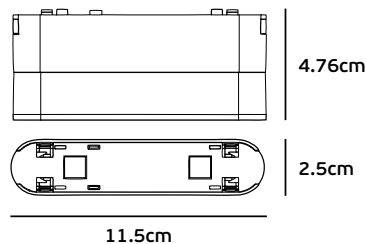

=

VK/04475/BASE



VK/04475

Product Models

Code	Model	Color	Box
71164-168721	VK/04475/B/BASE	■ Black	50pcs
71164-169721	VK/04475/W/BASE	□ White	50pcs

Details
Input Voltage **DC40-48V**. Rotation Angle **0-90°**. Material **Aluminium**. Installation **Track**.

operation only with







On-Off
Dimmable
CCT 2700K~6000K



Base for magnetics lights

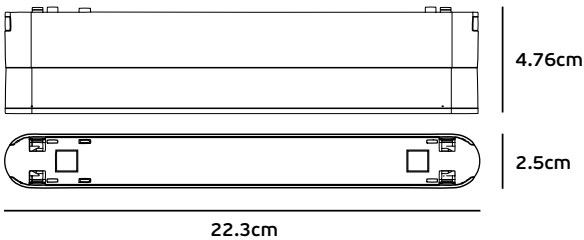

VK/04476/BASE



+



=




VK/04476

Product Models

Code	Model	Color	Box
71164-170721	VK/04476/B/BASE	■ Black	50pcs
71164-171721	VK/04476/W/BASE	□ White	50pcs

Details
Input Voltage **DC40-48V**. Rotation Angle **0-90°**. Material **Aluminium**. Installation **Track**.



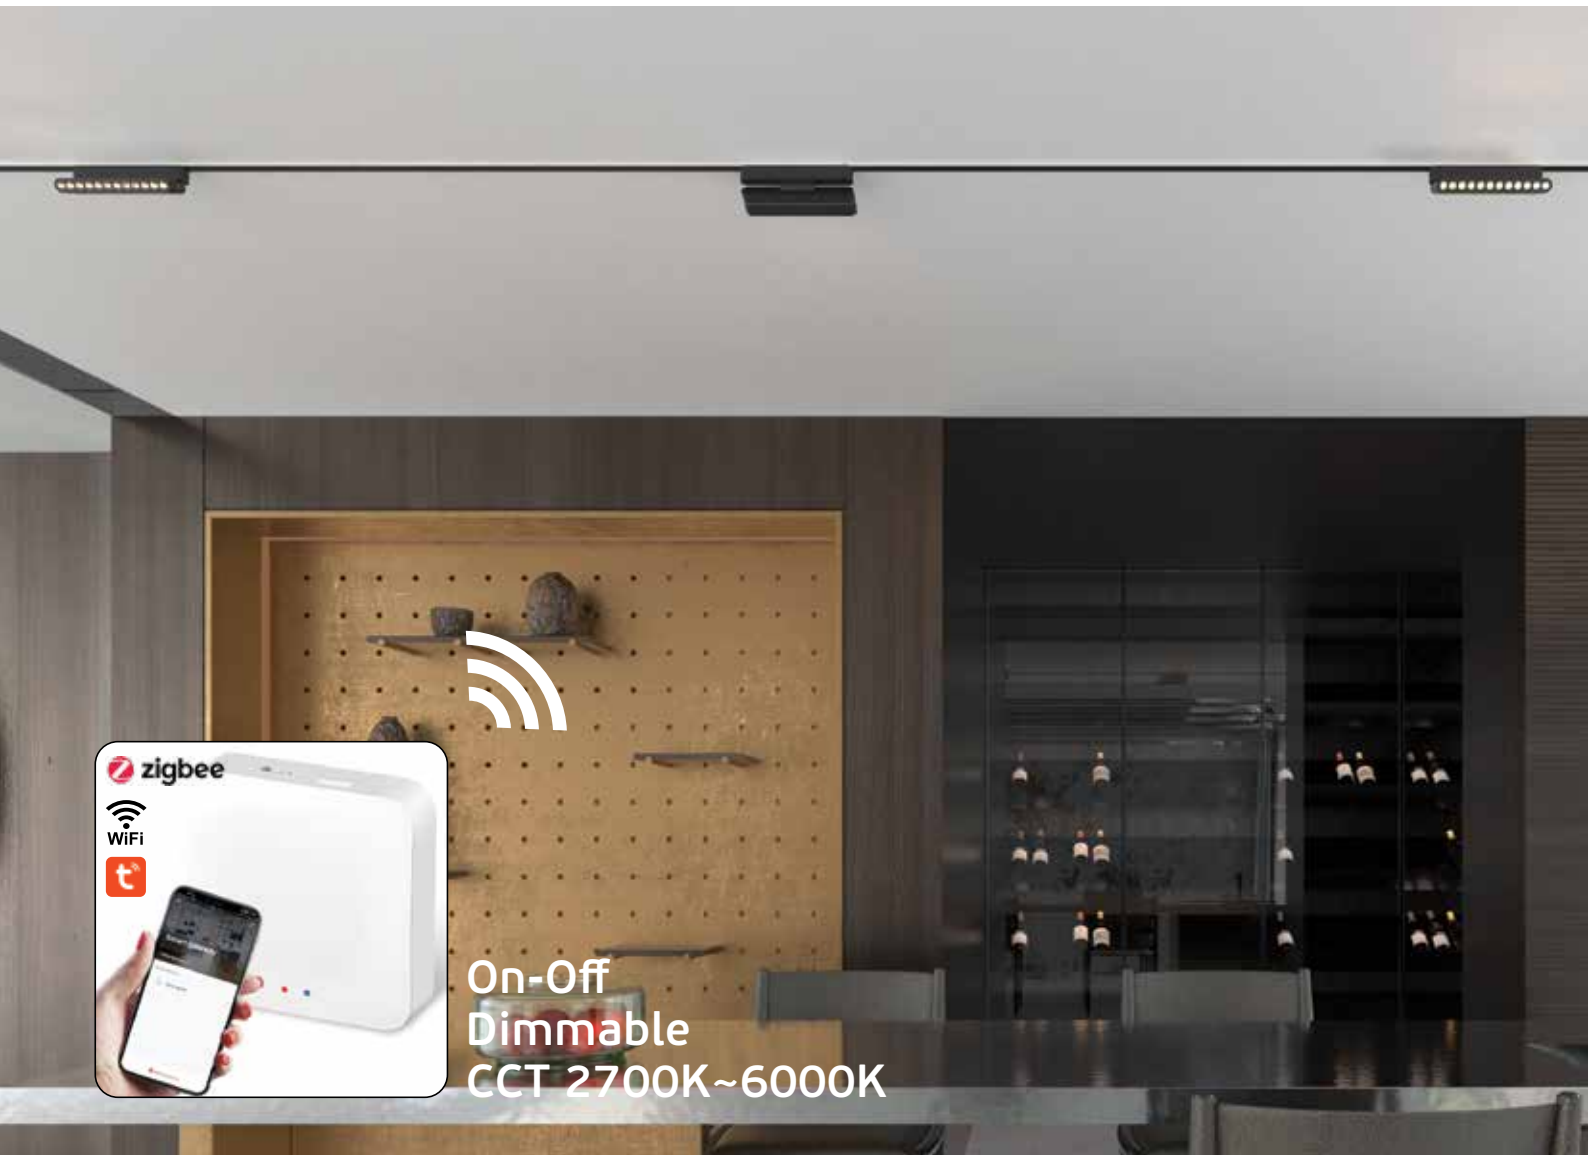



200cm, 150cm, 100cm

VK/04478

Product Models

Code	Model	Color	Voltage	Length	Thickness	Box
71164-009115	VK/04478/2/B	■ Black	40V	200cm	0.55cm	40pcs
71164-010115	VK/04478/2/W	□ White	40V	200cm	0.55cm	40pcs
71164-033115	VK/04478/1.5/B	■ Black	40V	150cm	0.55cm	40pcs
71164-034115	VK/04478/1.5/W	□ White	40V	150cm	0.55cm	40pcs
71164-031115	VK/04478/1/B	■ Black	40V	100cm	0.55cm	40pcs
71164-032115	VK/04478/1/W	□ White	40V	100cm	0.55cm	40pcs

Details

Magnetic surface mounted track line 40V. Length 2m, thickness 0.55cm. IP Rating IP20. Working temperature <45°C. Material Aluminium.

operation only with



VK/04490 Zigbee wireless gateway

Product Models


Code	Model	Color	Power input	Dimensions	Box
71164-176721	VK/04490/B/ZB	■ Black	DC 5V 1A	6.1x6.1x1.5cm	1pc
71164-177721	VK/04490/W/ZB	□ White	DC 5V 1A	6.1x6.1x1.5cm	1pc

Details

Connection method **Zigbee wireless gateway**. Power input **DC 5V 1A**. Operating temperature **-20°C~45°C**. Working humidity **10%-90%RH (No condensation)**. Application **"Tuya Smart"**.



Product description

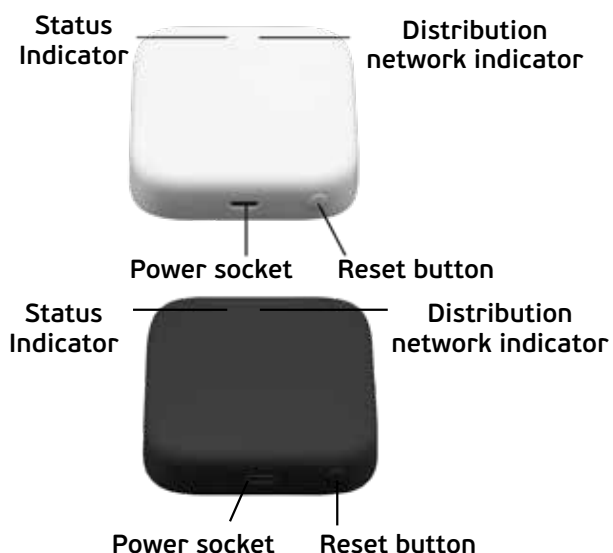

Preparation for use

1. Connect your phone to Wi-fi.






Ensure that the product is within the effective coverage of the Wifi network to ensure an effective connection between the product and the smart host (gateway) Zigbee network.

*The gateway is in the network distribution mode (the indicator lights are on at the same time)

2. Download and open the App. Search for "Tuya Smart" in the application store or scan the QR code on the outer packaging /instructions to download and install the App.



Magnetic Track Lights *LED*

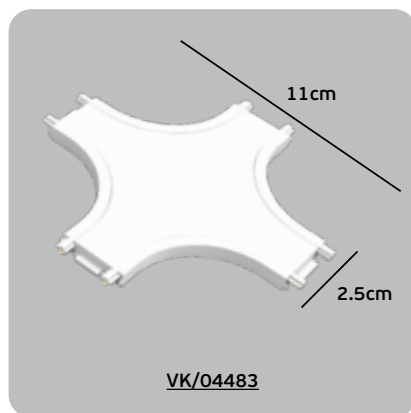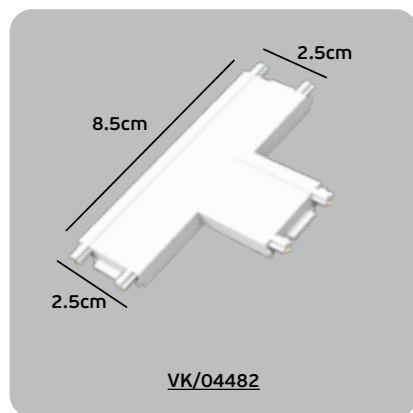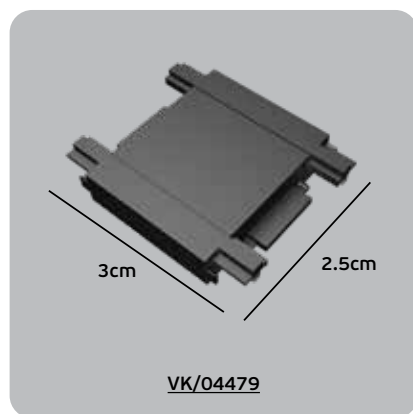


VK/04479-VK/04484

Product Models

Code	Model	Color	Voltage	Dimensions	Thickness	Box
71164-011115	VK/04479/B/CON	■ Black	40V	3x2.5cm	0.55cm	50pcs
71164-012115	VK/04479/W/CON	□ White	40V	3x2.5cm	0.55cm	50pcs
71164-013115	VK/04480/B/CON	■ Black	40V	5.5x5.5cm	0.55cm	50pcs
71164-014115	VK/04480/W/CON	□ White	40V	5.5x5.5cm	0.55cm	50pcs
71164-015115	VK/04481/B/CON	■ Black	40V	5x5cm	0.55cm	50pcs
71164-016115	VK/04481/W/CON	□ White	40V	5x5cm	0.55cm	50pcs
71164-017115	VK/04482/B/CON	■ Black	40V	8.5x2.5cm	0.55cm	50pcs
71164-018115	VK/04482/W/CON	□ White	40V	8.5x2.5cm	0.55cm	50pcs
71164-019115	VK/04483/B/CON	■ Black	40V	11x2.5cm	0.55cm	50pcs
71164-020115	VK/04483/W/CON	□ White	40V	11x2.5cm	0.55cm	50pcs
71164-021115	VK/04484/B/CON	■ Black	40V	5.5x5.5cm	0.55cm	50pcs
71164-022115	VK/04484/W/CON	□ White	40V	5.5x5.5cm	0.55cm	50pcs

Details

Connectors for Magnetic surface mounted track line **40V**. IP Rating **IP20**. Working temperature **<45°C**. Material **Aluminium**.

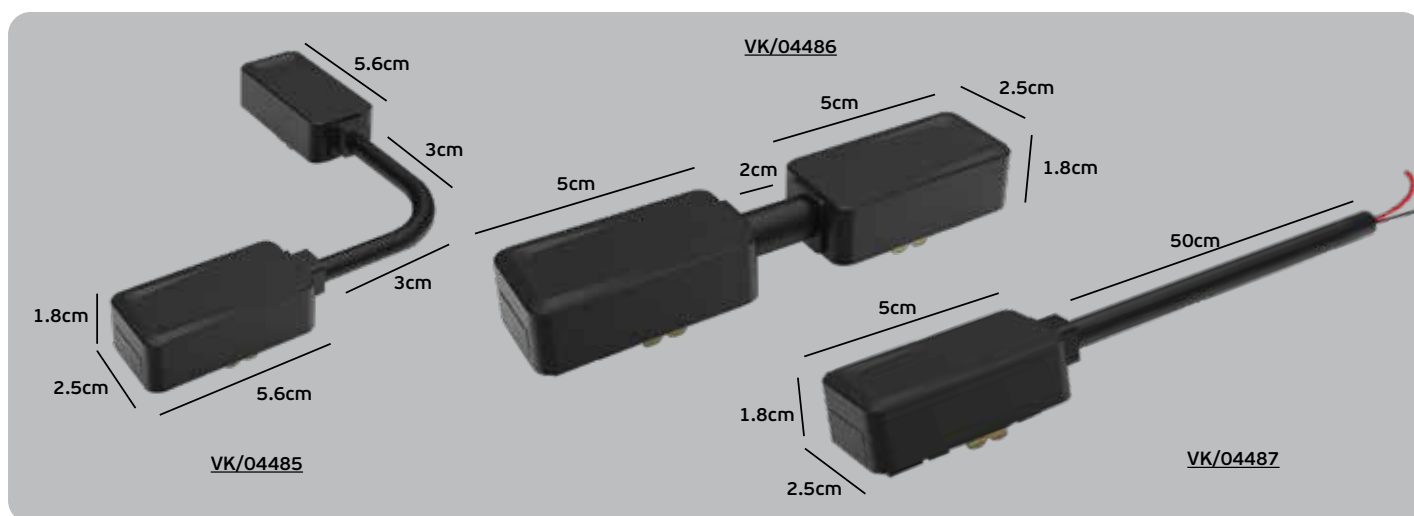


VK/04485-VK/04487

Product Models

Code	Model	Color	Voltage	Dimensions	Thickness	Box
71164-023115	VK/04485/B/MOD	■ Black	40V	5.6x2.5cm	1.8cm	100pcs
71164-024115	VK/04485/W/MOD	□ White	40V	5.6x2.5cm	1.8cm	100pcs
71164-025115	VK/04486/B/MOD	■ Black	40V	5x2.5cm	1.8cm	100pcs
71164-026115	VK/04486/W/MOD	□ White	40V	5x2.5cm	1.8cm	100pcs
71164-027115	VK/04487/B/MOD	■ Black	40V	5x2.5cm (+50cm cable)	1.8cm	100pcs
71164-028115	VK/04487/W/MOD	□ White	40V	5x2.5cm (+50cm cable)	1.8cm	100pcs

Details

Connection module for Magnetic surface mounted track line **40V**. IP Rating **IP20**. Working temperature **<45°C**. Material **Aluminium**.

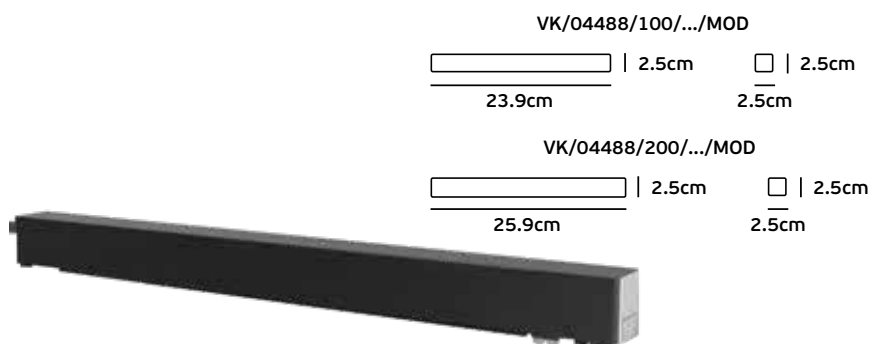

VK/04488

Product Models

Code	Model	Color	Power	Voltage	Dimensions	Thickness	Box
71164-029115	VK/04488/100/B/MOD	■ Black	100W	40V	23.9x2.5cm	2.5cm	50pcs
71164-030115	VK/04488/100/W/MOD	□ White	100W	40V	23.9x2.5cm	2.5cm	50pcs
71164-035115	VK/04488/200/B/MOD	■ Black	200W	40V	25.9x2.5cm	2.5cm	50pcs
71164-036115	VK/04488/200/W/MOD	□ White	200W	40V	25.9x2.5cm	2.5cm	50pcs

Details

Connection module for Magnetic surface mounted track line **40V**. IP Rating **IP20**. Working temperature **<45°C**. Material **Aluminium**.




Dimmable LED Magnetic Track lights 48V



*magnetic 05
track lighting*

Magnetic Track Light LED

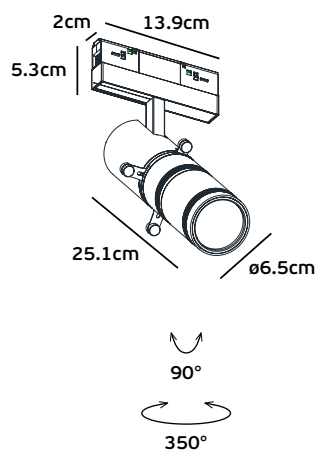

VK/04433/TR


VK/04433/TR

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-127721	VK/04433/TR/B/W	■ Black sand	3000K	25W	15°-1180lm / 21°-1600lm	15°-21°	CRI>90	8pcs

Details

Input current **700mA**. Input Voltage **DC36V**. Watt **25W**. CRI>90. Type of Led **bridgeLux**. COB with driver. Driver input **DC48V**, Output **DC 3-40V 700mA**. Angle **15-21°**. Angle of inclination **90°**. Rotation Angle **350°**. Options **ON/OFF, 0-10V, Dali**. Dimmable. Lifetime **20.000 hrs**. Working temperature **< 45°C**. Material **Aluminium+PC**. Installation **Magnet+buckle**. 2 years guarantee.



IP20. 25W. DC48V.



15°




<<<




>>>

21°



*06 track lights
&
ceiling/pendant lights*



VK/04452/TR


VK/04452/TR		Product Models							
Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Diameter	Box
71164-128721	VK/04452/TR/W/W	□ White sand	3000K	9W	580lm	110º	CRI>90	ø15cm	20pcs
71164-129721	VK/04452/TR/W/C	□ White sand	4000K	9W	580lm	110º	CRI>90	ø15cm	20pcs
71164-130721	VK/04452/TR/B/W	■ Black sand	3000K	9W	580lm	110º	CRI>90	ø15cm	20pcs
71164-131721	VK/04452/TR/B/C	■ Black sand	4000K	9W	580lm	110º	CRI>90	ø15cm	20pcs

Details
9W: Input current 300mA, Input Voltage DC 30V. Driver: Input AC220-240V 50/60Hz, Output DC 26-40V 300mA.
Watt 9W. CRI>90. Type of Led **bridgeLux SMD with driver**. Angle 110°. Angle of inclination 45°. Rotation Angle 350°. No Dimmable Lifetime 20.000 hrs.
Working temperature < 45°C. Material Aluminium. Installation Surface-mounted spot track light. 2 years guarantee.



IP20. 9W.



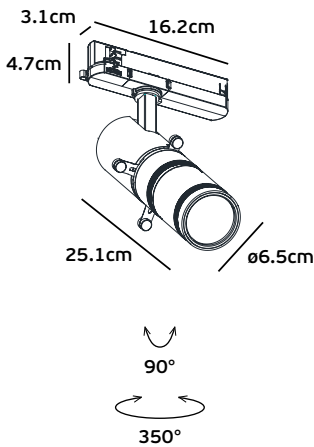

VK/04453/TR

VK/04453/TR

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Degrees	CRI	Box
71164-132721	VK/04453/TR/B/W	■ Black sand	3000K	25W	15°-1180lm / 21°-1600lm	15°-21°	CRI>90	8pcs
71164-133721	VK/04453/TR/B/C	■ Black sand	4000K	25W	15°-1180lm / 21°-1600lm	15°-21°	CRI>90	8pcs

Details

Input current **700mA**. Input Voltage **DC36V**. Watt **25W**. CRI>90. Type of Led **bridgeLux**. **COB with driver**. Driver: input AC 220-240V 50/60Hz Output **DC30-40V 700mA**. Angle **15-21°**. Angle of inclination **90°**. Rotation Angle **350°**. **No Dimmable**. Lifetime **20.000 hrs**. Working temperature **< 45°C**. Material **Aluminium**. Installation **Track**. 2 years guarantee.




IP20. 25W. 220-240V.



15°



21°



Track lights LED



VK/04428/TR/W



VK/04428/TR/B

VK/04428/TR 36° ø10cm

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-957128	VK/04428/TR/W/36/830	□ White	3000K	12.6→42W	1.547→4.619lm	F	36°	CRI>80	KGP	2pcs
64174-958128	VK/04428/TR/W/36/840	□ White	4000K	12.6→42W	1.547→4.619lm	F	36°	CRI>80	KGP	2pcs
64174-959128	VK/04428/TR/B/36/830	■ Black	3000K	12.6→42W	1.547→4.619lm	F	36°	CRI>80	KGP	2pcs
64174-960128	VK/04428/TR/B/36/840	■ Black	4000K	12.6→42W	1.547→4.619lm	F	36°	CRI>80	KGP	2pcs


Details

Voltage 220-240V. LED source  COB. Working temperature -20°C→ 45°C. Lifetime 50.000hrs. Clicks 25.000. Material Die-casting aluminium. 4-wires adapter driver.

 **5 years guarantee**



IP20.




VK/04428/REF

Product Models

Code	Model	Box
64174-961128	VK/04428/REF/15 Silver. Metal. Reflector 15°.	1pc
64174-962128	VK/04428/REF/24 Silver. Metal. Reflector 24°.	1pc

Details

Can be used to VK/04428/TR. Material Metal.



SINCE 1978

\X

LEADING LIGHT

12.6W~42W



5 years guarantee

Pout	Lumen	Iout	1	2	3	4
12.6W	1547	300mA	-	-	-	-
14.7W	1760	350mA	-	-	-	ON
16.8W	2026	400mA	-	-	ON	-
18.9W	2231	450mA	-	-	ON	ON
21W	2478	500mA	-	ON	-	-
23.1W	2672	550mA	-	ON	-	ON
25.2W	2915	600mA	-	ON	ON	-
27.3W	3117	650mA	-	ON	ON	ON
29.4W	3314	700mA	ON	-	-	-
31.5W	3493	750mA	ON	-	-	ON
33.6W	3742	800mA	ON	-	ON	-
34W	3907	850mA	ON	-	ON	ON
36W	4102	900mA	ON	ON	-	-
38W	4275	950mA	ON	ON	-	ON
40W	4460	1000mA	ON	ON	ON	-
42W	4619	1050mA	ON	ON	ON	ON

Track lights/Ceiling lights



VK/04477/TR
ø4cm

Product Models


Code	Model	Color	Lampholder	Max Watt	Box
64174-954121	VK/04477/TR/W	□ White	GU10 (MR11)	35W	1pc
64174-955121	VK/04477/TR/B	■ Black	GU10 (MR11)	35W	1pc

Details

Voltage 230V. Max watt 35W. Lampholder GU10 (MR11). Working temperature -20°C→ 45°C. Material Pure aluminium. 4-wires adapter driver.



IP20. 230V.




VK/04477/WA
ø4cm

Product Models


Code	Model	Color	Lampholder	Max Watt	Box
64174-956121	VK/04477/WA/W	□ White	GU10 (MR11)	35W	1pc
64174-957121	VK/04477/WA/B	■ Black	GU10 (MR11)	35W	1pc

Details

Voltage 230V. Max watt 35W. Lampholder GU10 (MR11). Working temperature -20°C→ 45°C. Material Pure aluminium. Wall/Ceiling.



IP20. 230V.





VK/04431

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Box
64174-886111	VK/04431/B/W	■ Black	3000K	23W	1.600lm	G	120°	CRI>80	1pc
64174-887111	VK/04431/B/C	■ Black	4000K	23W	1.650lm	G	120°	CRI>80	1pc


Details

Voltage 100-240V. LED source SMD2835. Working temperature -20°C→ 60°C. Lifetime 50.000hrs. Clicks 15.000.

Material Plastic. 4-wires adapter driver. 2 years quarantee.



IP20.



Track lights LED



ø6cm
18° 24° 40°

Flicker free

VK/04350/TR

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-542269	VK/04350/TR/W/18/927	□ White	2700K	18.5W	1.958lm	E	18°	CRI>90	OSRAM 500mA	6pcs
64174-543269	VK/04350/TR/W/18/930	□ White	3000K	17.1W	2.052lm	D	18°	CRI>90	OSRAM 500mA	6pcs
64174-733269	VK/04350/TR/W/18/935	□ White	3500K	16.4W	2.124lm	D	18°	CRI>90	OSRAM 500mA	6pcs
64174-544269	VK/04350/TR/W/18/940	□ White	4000K	16.0W	2.167lm	D	18°	CRI>90	OSRAM 500mA	6pcs
64174-545269	VK/04350/TR/B/18/927	■ Black	2700K	18.5W	1.958lm	E	18°	CRI>90	OSRAM 500mA	6pcs
64174-499269	VK/04350/TR/B/18/930	■ Black	3000K	17.1W	2.052lm	D	18°	CRI>90	OSRAM 500mA	6pcs
64174-734269	VK/04350/TR/B/18/935	■ Black	3500K	16.4W	2.124lm	D	18°	CRI>90	OSRAM 500mA	6pcs
64174-546269	VK/04350/TR/B/18/940	■ Black	4000K	16.0W	2.167lm	D	18°	CRI>90	OSRAM 500mA	6pcs
64174-547269	VK/04350/TR/G/18/927	■ Grey	2700K	18.5W	1.958lm	E	18°	CRI>90	OSRAM 500mA	6pcs
64174-548269	VK/04350/TR/G/18/930	■ Grey	3000K	17.1W	2.052lm	D	18°	CRI>90	OSRAM 500mA	6pcs
64174-735269	VK/04350/TR/G/18/935	■ Grey	3500K	16.4W	2.124lm	D	18°	CRI>90	OSRAM 500mA	6pcs
64174-549269	VK/04350/TR/G/18/940	■ Grey	4000K	16.0W	2.167lm	D	18°	CRI>90	OSRAM 500mA	6pcs
64174-550269	VK/04350/TR/W/24/927	□ White	2700K	18.5W	1.958lm	E	24°	CRI>90	OSRAM 500mA	6pcs
64174-500269	VK/04350/TR/W/24/930	□ White	3000K	17.1W	2.052lm	D	24°	CRI>90	OSRAM 500mA	6pcs
64174-736269	VK/04350/TR/W/24/935	□ White	3500K	16.4W	2.124lm	D	24°	CRI>90	OSRAM 500mA	6pcs
64174-551269	VK/04350/TR/W/24/940	□ White	4000K	16.0W	2.167lm	D	24°	CRI>90	OSRAM 500mA	6pcs
64174-552269	VK/04350/TR/B/24/927	■ Black	2700K	18.5W	1.958lm	E	24°	CRI>90	OSRAM 500mA	6pcs
64174-553269	VK/04350/TR/B/24/930	■ Black	3000K	17.1W	2.052lm	D	24°	CRI>90	OSRAM 500mA	6pcs
64174-737269	VK/04350/TR/B/24/935	■ Black	3500K	16.4W	2.124lm	D	24°	CRI>90	OSRAM 500mA	6pcs
64174-554269	VK/04350/TR/B/24/940	■ Black	4000K	16.0W	2.164lm	D	24°	CRI>90	OSRAM 500mA	6pcs
64174-555269	VK/04350/TR/G/24/927	■ Grey	2700K	18.5W	1.958lm	E	24°	CRI>90	OSRAM 500mA	6pcs
64174-556269	VK/04350/TR/G/24/930	■ Grey	3000K	17.1W	2.052lm	D	24°	CRI>90	OSRAM 500mA	6pcs
64174-738269	VK/04350/TR/G/24/935	■ Grey	3500K	16.4W	2.124lm	D	24°	CRI>90	OSRAM 500mA	6pcs
64174-557269	VK/04350/TR/G/24/940	■ Grey	4000K	16.0W	2.164lm	D	24°	CRI>90	OSRAM 500mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-558269	VK/04350/TR/W/40/927	□ White	2700K	18.5W	1.958lm	E	40°	CRI>90	OSRAM 500mA	6pcs
64174-559269	VK/04350/TR/W/40/930	□ White	3000K	17.1W	2.052lm	D	40°	CRI>90	OSRAM 500mA	6pcs
64174-739269	VK/04350/TR/W/40/935	□ White	3500K	16.4W	2.124lm	D	40°	CRI>90	OSRAM 500mA	6pcs
64174-561269	VK/04350/TR/W/40/940	□ White	4000K	16.0W	2.167lm	D	40°	CRI>90	OSRAM 500mA	6pcs
64174-562269	VK/04350/TR/B/40/927	■ Black	2700K	18.5W	1.958lm	E	40°	CRI>90	OSRAM 500mA	6pcs
64174-563269	VK/04350/TR/B/40/930	■ Black	3000K	17.1W	2.052lm	D	40°	CRI>90	OSRAM 500mA	6pcs
64174-740269	VK/04350/TR/B/40/935	■ Black	3500K	16.4W	2.124lm	D	40°	CRI>90	OSRAM 500mA	6pcs
64174-564269	VK/04350/TR/B/40/940	■ Black	4000K	16.0W	2.167lm	D	40°	CRI>90	OSRAM 500mA	6pcs
64174-565269	VK/04350/TR/G/40/927	■ Grey	2700K	18.5W	1.958lm	E	40°	CRI>90	OSRAM 500mA	6pcs
64174-501269	VK/04350/TR/G/40/930	■ Grey	3000K	17.1W	2.052lm	D	40°	CRI>90	OSRAM 500mA	6pcs
64174-741269	VK/04350/TR/G/40/935	■ Grey	3500K	16.4W	2.124lm	D	40°	CRI>90	OSRAM 500mA	6pcs
64174-566269	VK/04350/TR/G/40/940	■ Grey	4000K	16.0W	2.167lm	D	40°	CRI>90	OSRAM 500mA	6pcs

Details


Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20°C → 50°C**. Lifetime **60.000hrs**. Clicks **100.000**. Material **Aluminium**. 3-phase adapter.

5 years guarantee




IP20.



VK/04350/18




VK/04350/24



VK/04350/40

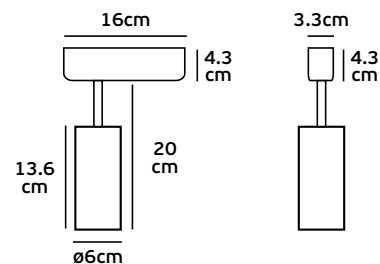

VK/04350/HONEYCOMB

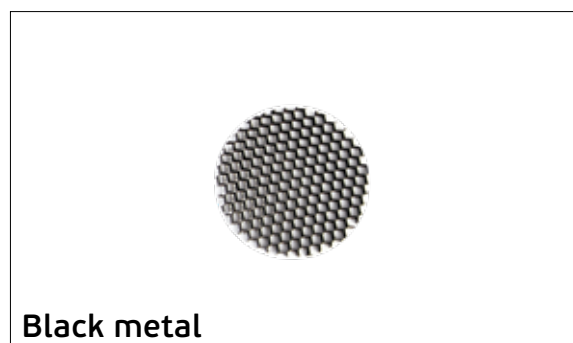


Product Models

Code	Model	Box
64174-742269	VK/04350/HONEYCOMB Black. Metal. Filter.	1pc

Details

Can be used to **VK/04350**. Material **Metal**.



Track lights *LED Dimmable*



ø6cm
18° 24° 40°

Flicker free

VK/04350/TR/D

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-567269	VK/04350/TR/D/W/18/927	□ White	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64174-568269	VK/04350/TR/D/W/18/930	□ White	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-743269	VK/04350/TR/D/W/18/935	□ White	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-569269	VK/04350/TR/D/W/18/940	□ White	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-570269	VK/04350/TR/D/B/18/927	■ Black	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64174-496269	VK/04350/TR/D/B/18/930	■ Black	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-744269	VK/04350/TR/D/B/18/935	■ Black	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-571269	VK/04350/TR/D/B/18/940	■ Black	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-572269	VK/04350/TR/D/G/18/927	■ Grey	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64174-573269	VK/04350/TR/D/G/18/930	■ Grey	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-745269	VK/04350/TR/D/G/18/935	■ Grey	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-574269	VK/04350/TR/D/G/18/940	■ Grey	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-575269	VK/04350/TR/D/W/24/927	□ White	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64174-497269	VK/04350/TR/D/W/24/930	□ White	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-746269	VK/04350/TR/D/W/24/935	□ White	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-576269	VK/04350/TR/D/W/24/940	□ White	4000K	16.0W	2.167lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-577269	VK/04350/TR/D/B/24/927	■ Black	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64174-578269	VK/04350/TR/D/B/24/930	■ Black	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-747269	VK/04350/TR/D/B/24/935	■ Black	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-579269	VK/04350/TR/D/B/24/940	■ Black	4000K	16.0W	2.164lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-580269	VK/04350/TR/D/G/24/927	■ Grey	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64174-581269	VK/04350/TR/D/G/24/930	■ Grey	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-748269	VK/04350/TR/D/G/24/935	■ Grey	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-582269	VK/04350/TR/D/G/24/940	■ Grey	4000K	16.0W	2.164lm	D	24°	CRI>90	HEP 500mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-583269	VK/04350/TR/D/W/40/927	□ White	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64174-584269	VK/04350/TR/D/W/40/930	□ White	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-749269	VK/04350/TR/D/W/40/935	□ White	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-585269	VK/04350/TR/D/W/40/940	□ White	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-586269	VK/04350/TR/D/B/40/927	■ Black	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64174-587269	VK/04350/TR/D/B/40/930	■ Black	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-750269	VK/04350/TR/D/B/40/935	■ Black	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-588269	VK/04350/TR/D/B/40/940	■ Black	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-589269	VK/04350/TR/D/G/40/927	■ Grey	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64174-498269	VK/04350/TR/D/G/40/930	■ Grey	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-751269	VK/04350/TR/D/G/40/935	■ Grey	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-590269	VK/04350/TR/D/G/40/940	■ Grey	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs

Details


Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20°C → 50°C**. Lifetime **60.000hrs**. Clicks **100.000**. Material **Aluminium**. 3-phase adapter.

5 years guarantee




IP20.



VK/04350/18




VK/04350/24



VK/04350/40

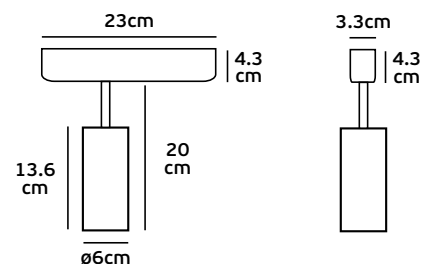

VK/04350/HONEYCOMB

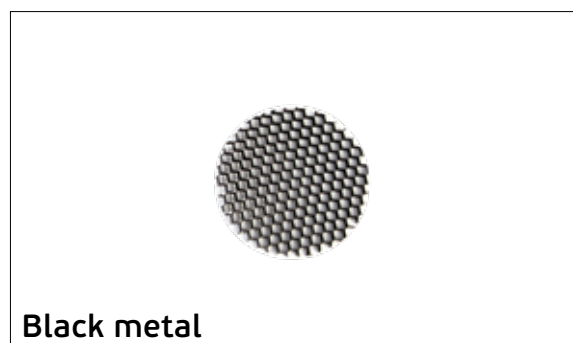


Product Models

Code	Model	Box
64174-742269	VK/04350/HONEYCOMB Black. Metal. Filter.	1pc

Details

Can be used to **VK/04350**. Material **Metal**.



Track lights LED



ø8cm
18° 24° 40°

Flicker free

VK/04352/TR

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-591269	VK/04352/TR/W/18/927	□ White	2700K	27.0W	2.828lm	E	18°	CRI>90	OSRAM 700mA	6pcs
64174-592269	VK/04352/TR/W/18/930	□ White	3000K	25.5W	2.959lm	D	18°	CRI>90	OSRAM 700mA	6pcs
64174-752269	VK/04352/TR/W/18/935	□ White	3500K	24.3W	3.071lm	D	18°	CRI>90	OSRAM 700mA	6pcs
64174-593269	VK/04352/TR/W/18/940	□ White	4000K	23.7W	3.137lm	D	18°	CRI>90	OSRAM 700mA	6pcs
64174-753269	VK/04352/TR/W/18/865	□ White	6500K	18.7W	2.935lm	C	18°	CRI>80	OSRAM 550mA	6pcs
64174-594269	VK/04352/TR/B/18/927	■ Black	2700K	27.0W	2.828lm	E	18°	CRI>90	OSRAM 700mA	6pcs
64174-514269	VK/04352/TR/B/18/930	■ Black	3000K	25.5W	2.959lm	D	18°	CRI>90	OSRAM 700mA	6pcs
64174-754269	VK/04352/TR/B/18/935	■ Black	3500K	24.3W	3.071lm	D	18°	CRI>90	OSRAM 700mA	6pcs
64174-595269	VK/04352/TR/B/18/940	■ Black	4000K	23.7W	3.137lm	D	18°	CRI>90	OSRAM 700mA	6pcs
64174-755269	VK/04352/TR/B/18/865	■ Black	6500K	18.7W	2.935lm	C	18°	CRI>80	OSRAM 550mA	6pcs
64174-596269	VK/04352/TR/G/18/927	■ Grey	2700K	27.0W	2.828lm	E	18°	CRI>90	OSRAM 700mA	6pcs
64174-597269	VK/04352/TR/G/18/930	■ Grey	3000K	25.5W	2.959lm	D	18°	CRI>90	OSRAM 700mA	6pcs
64174-756269	VK/04352/TR/G/18/935	■ Grey	3500K	24.3W	3.071lm	D	18°	CRI>90	OSRAM 700mA	6pcs
64174-598269	VK/04352/TR/G/18/940	■ Grey	4000K	23.7W	3.137lm	D	18°	CRI>90	OSRAM 700mA	6pcs
64174-757269	VK/04352/TR/G/18/865	■ Grey	6500K	18.7W	2.935lm	C	18°	CRI>80	OSRAM 550mA	6pcs
64174-599269	VK/04352/TR/W/24/927	□ White	2700K	27.0W	2.828lm	E	24°	CRI>90	OSRAM 700mA	6pcs
64174-515269	VK/04352/TR/W/24/930	□ White	3000K	25.5W	2.959lm	D	24°	CRI>90	OSRAM 700mA	6pcs
64174-758269	VK/04352/TR/W/24/935	□ White	3500K	24.3W	3.071lm	D	24°	CRI>90	OSRAM 700mA	6pcs
64174-600269	VK/04352/TR/W/24/940	□ White	4000K	23.7W	3.137lm	D	24°	CRI>90	OSRAM 700mA	6pcs
64174-759269	VK/04352/TR/W/24/865	□ White	6500K	18.7W	2.935lm	C	24°	CRI>80	OSRAM 550mA	6pcs
64174-601269	VK/04352/TR/B/24/927	■ Black	2700K	27.0W	2.828lm	E	24°	CRI>90	OSRAM 700mA	6pcs
64174-602269	VK/04352/TR/B/24/930	■ Black	3000K	25.5W	2.959lm	D	24°	CRI>90	OSRAM 700mA	6pcs
64174-760269	VK/04352/TR/B/24/935	■ Black	3500K	24.3W	3.071lm	D	24°	CRI>90	OSRAM 700mA	6pcs
64174-603269	VK/04352/TR/B/24/940	■ Black	4000K	23.7W	3.137lm	D	24°	CRI>90	OSRAM 700mA	6pcs
64174-761269	VK/04352/TR/B/24/865	■ Black	6500K	18.7W	2.935lm	C	24°	CRI>80	OSRAM 550mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-604269	VK/04352/TR/G/24/927	■ Grey	2700K	27.0W	2.828lm	E	24°	CRI>90	OSRAM 700mA	6pcs
64174-605269	VK/04352/TR/G/24/930	■ Grey	3000K	25.5W	2.959lm	D	24°	CRI>90	OSRAM 700mA	6pcs
64174-762269	VK/04352/TR/G/24/935	■ Grey	3500K	24.3W	3.071lm	D	24°	CRI>90	OSRAM 700mA	6pcs
64174-606269	VK/04352/TR/G/24/940	■ Grey	4000K	23.7W	3.137lm	D	24°	CRI>90	OSRAM 700mA	6pcs
64174-763269	VK/04352/TR/G/24/865	■ Grey	6500K	18.7W	2.935lm	C	24°	CRI>80	OSRAM 550mA	6pcs
64174-607269	VK/04352/TR/W/40/927	□ White	2700K	27.0W	2.828lm	E	40°	CRI>90	OSRAM 700mA	6pcs
64174-608269	VK/04352/TR/W/40/930	□ White	3000K	25.5W	2.959lm	D	40°	CRI>90	OSRAM 700mA	6pcs
64174-764269	VK/04352/TR/W/40/935	□ White	3500K	24.3W	3.071lm	D	40°	CRI>90	OSRAM 700mA	6pcs
64174-609269	VK/04352/TR/W/40/940	□ White	4000K	23.7W	3.137lm	D	40°	CRI>90	OSRAM 700mA	6pcs
64174-765269	VK/04352/TR/W/40/865	□ White	6500K	18.7W	2.935lm	C	40°	CRI>80	OSRAM 550mA	6pcs
64174-610269	VK/04352/TR/B/40/927	■ Black	2700K	27.0W	2.828lm	E	40°	CRI>90	OSRAM 700mA	6pcs
64174-611269	VK/04352/TR/B/40/930	■ Black	3000K	25.5W	2.959lm	D	40°	CRI>90	OSRAM 700mA	6pcs
64174-766269	VK/04352/TR/B/40/935	■ Black	3500K	24.3W	3.071lm	D	40°	CRI>90	OSRAM 700mA	6pcs
64174-612269	VK/04352/TR/B/40/940	■ Black	4000K	23.7W	3.137lm	D	40°	CRI>90	OSRAM 700mA	6pcs
64174-767269	VK/04352/TR/B/40/865	■ Black	6500K	18.7W	2.935lm	C	40°	CRI>80	OSRAM 550mA	6pcs
64174-613269	VK/04352/TR/G/40/927	■ Grey	2700K	27.0W	2.828lm	E	40°	CRI>90	OSRAM 700mA	6pcs
64174-516269	VK/04352/TR/G/40/930	■ Grey	3000K	25.5W	2.959lm	D	40°	CRI>90	OSRAM 700mA	6pcs
64174-768269	VK/04352/TR/G/40/935	■ Grey	3500K	24.3W	3.071lm	D	40°	CRI>90	OSRAM 700mA	6pcs
64174-614269	VK/04352/TR/G/40/940	■ Grey	4000K	23.7W	3.137lm	D	40°	CRI>90	OSRAM 700mA	6pcs
64174-769269	VK/04352/TR/G/40/865	■ Grey	6500K	18.7W	2.935lm	C	40°	CRI>80	OSRAM 550mA	6pcs

Details


Voltage 220-240V. LED source **OSRAM**. Working temperature -20°C → 50°C. Lifetime 60.000hrs. Clicks 100.000.
Material **Aluminium**. 3-phase adapter.

5 years guarantee




IP20.



VK/04352/18



VK/04352/24



VK/04352/40

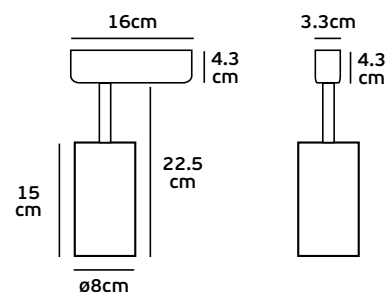

VK/04352/HONEYCOMB

Product Models

Code
64174-770269

Model
VK/04352/HONEYCOMB
Black. Metal. Filter.


Box
1pc

Details

Can be used to **VK/04352**. Material **Metal**.



Black metal



Track lights *LED Dimmable*



ø8cm
18° 24° 40°

Flicker free



VK/04352/TR/D

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-615269	VK/04352/TR/D/W/18/927	□ White	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64174-616269	VK/04352/TR/D/W/18/930	□ White	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-771269	VK/04352/TR/D/W/18/935	□ White	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-617269	VK/04352/TR/D/W/18/940	□ White	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-772269	VK/04352/TR/D/W/18/865	□ White	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64174-618269	VK/04352/TR/D/B/18/927	■ Black	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64174-517269	VK/04352/TR/D/B/18/930	■ Black	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-773269	VK/04352/TR/D/B/18/935	■ Black	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-619269	VK/04352/TR/D/B/18/940	■ Black	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-774269	VK/04352/TR/D/B/18/865	■ Black	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64174-620269	VK/04352/TR/D/G/18/927	■ Grey	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64174-621269	VK/04352/TR/D/G/18/930	■ Grey	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-775269	VK/04352/TR/D/G/18/935	■ Grey	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-622269	VK/04352/TR/D/G/18/940	■ Grey	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-776269	VK/04352/TR/D/G/18/865	■ Grey	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64174-623269	VK/04352/TR/D/W/24/927	□ White	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64174-518269	VK/04352/TR/D/W/24/930	□ White	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-777269	VK/04352/TR/D/W/24/935	□ White	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-624269	VK/04352/TR/D/W/24/940	□ White	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-778269	VK/04352/TR/D/W/24/865	□ White	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs
64174-625269	VK/04352/TR/D/B/24/927	■ Black	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64174-626269	VK/04352/TR/D/B/24/930	■ Black	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-779269	VK/04352/TR/D/B/24/935	■ Black	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-627269	VK/04352/TR/D/B/24/940	■ Black	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-780269	VK/04352/TR/D/B/24/865	■ Black	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs


Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-628269	VK/04352/TR/D/G/24/927	■ Grey	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64174-629269	VK/04352/TR/D/G/24/930	■ Grey	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-781269	VK/04352/TR/D/G/24/935	■ Grey	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-630269	VK/04352/TR/D/G/24/940	■ Grey	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-782269	VK/04352/TR/D/G/24/865	■ Grey	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs
64174-631269	VK/04352/TR/D/W/40/927	□ White	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64174-632269	VK/04352/TR/D/W/40/930	□ White	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-783269	VK/04352/TR/D/W/40/935	□ White	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-633269	VK/04352/TR/D/W/40/940	□ White	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-784269	VK/04352/TR/D/W/40/865	□ White	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs
64174-634269	VK/04352/TR/D/B/40/927	■ Black	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64174-635269	VK/04352/TR/D/B/40/930	■ Black	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-785269	VK/04352/TR/D/B/40/935	■ Black	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-636269	VK/04352/TR/D/B/40/940	■ Black	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-786269	VK/04352/TR/D/B/40/865	■ Black	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs
64174-637269	VK/04352/TR/D/G/40/927	■ Grey	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64174-519269	VK/04352/TR/D/G/40/930	■ Grey	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-787269	VK/04352/TR/D/G/40/935	■ Grey	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-638269	VK/04352/TR/D/G/40/940	■ Grey	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-788269	VK/04352/TR/D/G/40/865	■ Grey	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs

Details


Voltage 220-240V. LED source **OSRAM**. Working temperature -20°C → 50°C. Lifetime 60.000hrs. Clicks 100.000.
Material **Aluminium**. 3-phase adapter.

5 years guarantee    **IP20.**



VK/04352/18



VK/04352/24



VK/04352/40

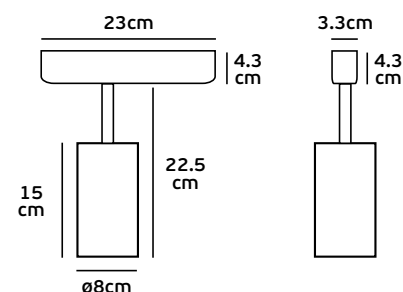

VK/04352/HONEYCOMB

Product Models

Code
64174-770269

Model
VK/04352/HONEYCOMB
Black. Metal. Filter.

Box
1pc

Details

Can be used to **VK/04352**. Material **Metal**.

Black metal



Track lights LED



ø12cm
18° 24° 40°

Flicker free

VK/04354/TR

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-639269	VK/04354/TR/W/18/927	□ White	2700K	39.20W	4.257lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-640269	VK/04354/TR/W/18/930	□ White	3000K	39.10W	4.295lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-789269	VK/04354/TR/W/18/935	□ White	3500K	39.00W	4.377lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-641269	VK/04354/TR/W/18/940	□ White	4000K	38.80W	4.467lm	D	18°	CRI>90	OSRAM 1050mA	6pcs
64174-642269	VK/04354/TR/B/18/927	■ Black	2700K	39.20W	4.257lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-643269	VK/04354/TR/B/18/930	■ Black	3000K	39.10W	4.295lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-790269	VK/04354/TR/B/18/935	■ Black	3500K	39.00W	4.377lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-644269	VK/04354/TR/B/18/940	■ Black	4000K	38.80W	4.467lm	D	18°	CRI>90	OSRAM 1050mA	6pcs
64174-645269	VK/04354/TR/G/18/927	■ Grey	2700K	39.20W	4.257lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-646269	VK/04354/TR/G/18/930	■ Grey	3000K	39.10W	4.295lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-791269	VK/04354/TR/G/18/935	■ Grey	3500K	39.00W	4.377lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-647269	VK/04354/TR/G/18/940	■ Grey	4000K	38.80W	4.467lm	D	18°	CRI>90	OSRAM 1050mA	6pcs
64174-648269	VK/04354/TR/W/24/927	□ White	2700K	39.20W	4.257lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64174-649269	VK/04354/TR/W/24/930	□ White	3000K	39.10W	4.295lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64174-792269	VK/04354/TR/W/24/935	□ White	3500K	39.00W	4.377lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64174-650269	VK/04354/TR/W/24/940	□ White	4000K	38.80W	4.467lm	D	24°	CRI>90	OSRAM 1050mA	6pcs
64174-651269	VK/04354/TR/B/24/927	■ Black	2700K	39.20W	4.257lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64174-652269	VK/04354/TR/B/24/930	■ Black	3000K	39.10W	4.295lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64174-793269	VK/04354/TR/B/24/935	■ Black	3500K	39.00W	4.377lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64174-653269	VK/04354/TR/B/24/940	■ Black	4000K	38.80W	4.467lm	D	24°	CRI>90	OSRAM 1050mA	6pcs
64174-654269	VK/04354/TR/G/24/927	■ Grey	2700K	39.20W	4.257lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64174-655269	VK/04354/TR/G/24/930	■ Grey	3000K	39.10W	4.295lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64174-794269	VK/04354/TR/G/24/935	■ Grey	3500K	39.00W	4.377lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64174-656269	VK/04354/TR/G/24/940	■ Grey	4000K	38.80W	4.467lm	D	24°	CRI>90	OSRAM 1050mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-657269	VK/04354/TR/W/40/927	□ White	2700K	39.20W	4.257lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-658269	VK/04354/TR/W/40/930	□ White	3000K	39.10W	4.295lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-795269	VK/04354/TR/W/40/935	□ White	3500K	39.00W	4.377lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-659269	VK/04354/TR/W/40/940	□ White	4000K	38.80W	4.467lm	D	40°	CRI>90	OSRAM 1050mA	6pcs
64174-661269	VK/04354/TR/B/40/927	■ Black	2700K	39.20W	4.257lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-662269	VK/04354/TR/B/40/930	■ Black	3000K	39.10W	4.295lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-796269	VK/04354/TR/B/40/935	■ Black	3500K	39.00W	4.377lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-663269	VK/04354/TR/B/40/940	■ Black	4000K	38.80W	4.467lm	D	40°	CRI>90	OSRAM 1050mA	6pcs
64174-665269	VK/04354/TR/G/40/927	■ Grey	2700K	39.20W	4.257lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-666269	VK/04354/TR/G/40/930	■ Grey	3000K	39.10W	4.295lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-797269	VK/04354/TR/G/40/935	■ Grey	3500K	39.00W	4.377lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-667269	VK/04354/TR/G/40/940	■ Grey	4000K	38.80W	4.467lm	D	40°	CRI>90	OSRAM 1050mA	6pcs

Details


Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20°C → 50°C**. Lifetime **60.000hrs**. Clicks **100.000**. Material **Aluminium**. 3-phase adapter.

5 years guarantee




IP20.




VK/04354/18




VK/04354/24



VK/04354/40

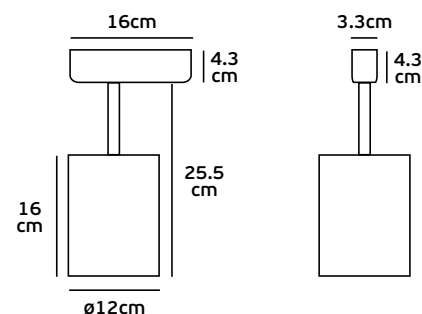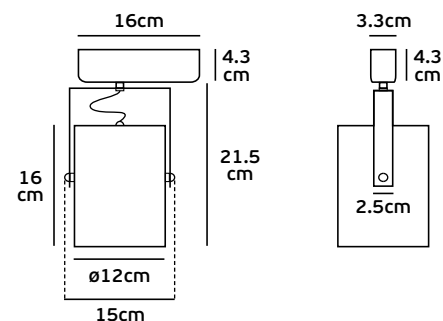

VK/04354/HONEYCOMB

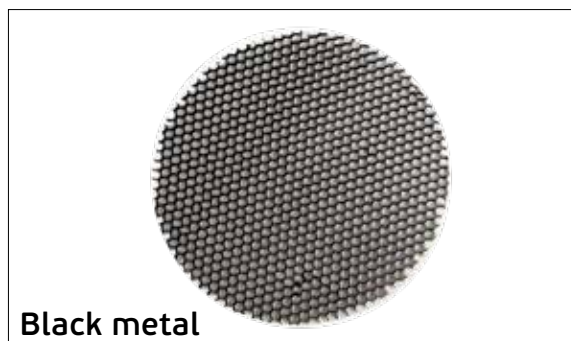


Product Models

Code	Model	Box
64174-798269	VK/04354/HONEYCOMB	1pc
	Black. Metal. Filter.	

Details

Can be used to **VK/04354**. Material **Metal**.



Track lights *LED Dimmable*



ø12cm
18° 24° 40°

Flicker free

VK/04354/TR/D

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-669269	VK/04354/TR/D/W/18/927	□ White	2700K	29.80W	3.163lm	E	18°	CRI>90	HEP 800mA	6pcs
64174-670269	VK/04354/TR/D/W/18/930	□ White	3000K	29.70W	3.512lm	D	18°	CRI>90	HEP 800mA	6pcs
64175-425269	VK/04354/TR/D/W/18/935	□ White	3500K	29.70W	3.265lm	E	18°	CRI>90	HEP 800mA	6pcs
64174-671269	VK/04354/TR/D/W/18/940	□ White	4000K	29.60W	3.344lm	E	18°	CRI>90	HEP 800mA	6pcs
64174-672269	VK/04354/TR/D/B/18/927	■ Black	2700K	29.80W	3.163lm	E	18°	CRI>90	HEP 800mA	6pcs
64174-673269	VK/04354/TR/D/B/18/930	■ Black	3000K	29.70W	3.512lm	D	18°	CRI>90	HEP 800mA	6pcs
64174-800269	VK/04354/TR/D/B/18/935	■ Black	3500K	29.70W	3.265lm	E	18°	CRI>90	HEP 800mA	6pcs
64174-674269	VK/04354/TR/D/B/18/940	■ Black	4000K	29.60W	3.344lm	E	18°	CRI>90	HEP 800mA	6pcs
64174-675269	VK/04354/TR/D/G/18/927	■ Grey	2700K	29.80W	3.163lm	E	18°	CRI>90	HEP 800mA	6pcs
64174-676269	VK/04354/TR/D/G/18/930	■ Grey	3000K	29.70W	3.512lm	D	18°	CRI>90	HEP 800mA	6pcs
64174-801269	VK/04354/TR/D/G/18/935	■ Grey	3500K	29.70W	3.265lm	E	18°	CRI>90	HEP 800mA	6pcs
64174-677269	VK/04354/TR/D/G/18/940	■ Grey	4000K	29.60W	3.344lm	E	18°	CRI>90	HEP 800mA	6pcs
64174-678269	VK/04354/TR/D/W/24/927	□ White	2700K	29.80W	3.163lm	E	24°	CRI>90	HEP 800mA	6pcs
64174-679269	VK/04354/TR/D/W/24/930	□ White	3000K	29.70W	3.512lm	D	24°	CRI>90	HEP 800mA	6pcs
64174-802269	VK/04354/TR/D/W/24/935	□ White	3500K	29.70W	3.265lm	E	24°	CRI>90	HEP 800mA	6pcs
64174-680269	VK/04354/TR/D/W/24/940	□ White	4000K	29.60W	3.344lm	E	24°	CRI>90	HEP 800mA	6pcs
64174-681269	VK/04354/TR/D/B/24/927	■ Black	2700K	29.80W	3.163lm	E	24°	CRI>90	HEP 800mA	6pcs
64174-682269	VK/04354/TR/D/B/24/930	■ Black	3000K	29.70W	3.512lm	D	24°	CRI>90	HEP 800mA	6pcs
64174-803269	VK/04354/TR/D/B/24/935	■ Black	3500K	29.70W	3.265lm	E	24°	CRI>90	HEP 800mA	6pcs
64174-683269	VK/04354/TR/D/B/24/940	■ Black	4000K	29.60W	3.344lm	E	24°	CRI>90	HEP 800mA	6pcs
64174-684269	VK/04354/TR/D/G/24/927	■ Grey	2700K	29.80W	3.163lm	E	24°	CRI>90	HEP 800mA	6pcs
64174-685269	VK/04354/TR/D/G/24/930	■ Grey	3000K	29.70W	3.512lm	D	24°	CRI>90	HEP 800mA	6pcs
64174-804269	VK/04354/TR/D/G/24/935	■ Grey	3500K	29.70W	3.265lm	E	24°	CRI>90	HEP 800mA	6pcs
64174-686269	VK/04354/TR/D/G/24/940	■ Grey	4000K	29.60W	3.344lm	E	24°	CRI>90	HEP 800mA	6pcs


Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-687269	VK/04354/TR/D/W/40/927	□ White	2700K	29.80W	3.163lm	E	40°	CRI>90	HEP 800mA	6pcs
64174-688269	VK/04354/TR/D/W/40/930	□ White	3000K	29.70W	3.512lm	D	40°	CRI>90	HEP 800mA	6pcs
64174-805269	VK/04354/TR/D/W/40/935	□ White	3500K	29.70W	3.265lm	E	40°	CRI>90	HEP 800mA	6pcs
64174-689269	VK/04354/TR/D/W/40/940	□ White	4000K	29.60W	3.344lm	E	40°	CRI>90	HEP 800mA	6pcs
64174-691269	VK/04354/TR/D/B/40/927	■ Black	2700K	29.80W	3.163lm	E	40°	CRI>90	HEP 800mA	6pcs
64174-692269	VK/04354/TR/D/B/40/930	■ Black	3000K	29.70W	3.512lm	D	40°	CRI>90	HEP 800mA	6pcs
64175-426269	VK/04354/TR/D/B/40/935	■ Black	3500K	29.70W	3.265lm	E	40°	CRI>90	HEP 800mA	6pcs
64174-693269	VK/04354/TR/D/B/40/940	■ Black	4000K	29.60W	3.344lm	E	40°	CRI>90	HEP 800mA	6pcs
64174-695269	VK/04354/TR/D/G/40/927	■ Grey	2700K	29.80W	3.163lm	E	40°	CRI>90	HEP 800mA	6pcs
64174-696269	VK/04354/TR/D/G/40/930	■ Grey	3000K	29.70W	3.512lm	D	40°	CRI>90	HEP 800mA	6pcs
64174-806269	VK/04354/TR/D/G/40/935	■ Grey	3500K	29.70W	3.265lm	E	40°	CRI>90	HEP 800mA	6pcs
64174-697269	VK/04354/TR/D/G/40/940	■ Grey	4000K	29.60W	3.344lm	E	40°	CRI>90	HEP 800mA	6pcs

Details


Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20°C → 50°C**. Lifetime **60.000hrs**. Clicks **100.000**. Material **Aluminium**. 3-phase adapter.

5 years guarantee   **IP20.**




VK/04354/18




VK/04354/24



VK/04354/40

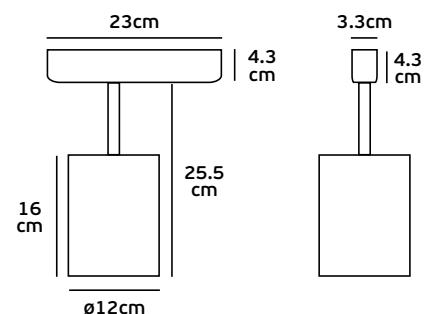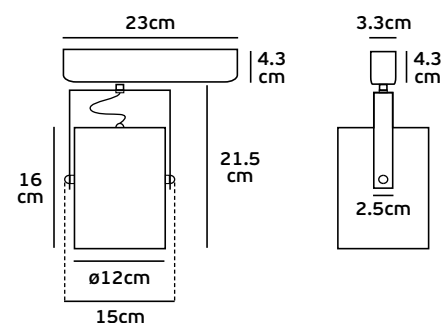

VK/04354/HONEYCOMB

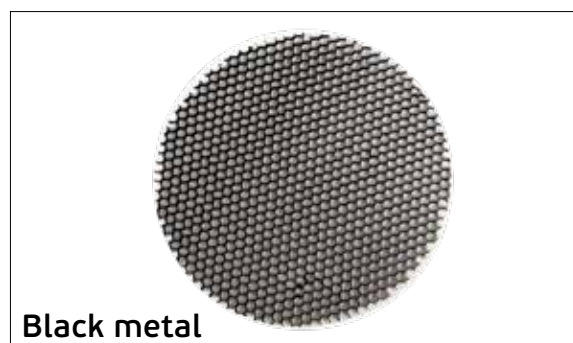


Product Models

Code	Model	Box
64174-798269	VK/04354/HONEYCOMB Black. Metal. Filter.	1pc

Details

Can be used to **VK/04354**. Material **Metal**.



Wall/Ceiling lights LED



ø6cm
18° 24° 40°

Flicker free

VK/04350/WA

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-807269	VK/04350/WA/W/18/927	□ White	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64174-808269	VK/04350/WA/W/18/930	□ White	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-809269	VK/04350/WA/W/18/935	□ White	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-810269	VK/04350/WA/W/18/940	□ White	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-811269	VK/04350/WA/B/18/927	■ Black	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64174-812269	VK/04350/WA/B/18/930	■ Black	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-813269	VK/04350/WA/B/18/935	■ Black	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-814269	VK/04350/WA/B/18/940	■ Black	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-815269	VK/04350/WA/G/18/927	■ Grey	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64174-816269	VK/04350/WA/G/18/930	■ Grey	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-817269	VK/04350/WA/G/18/935	■ Grey	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-818269	VK/04350/WA/G/18/940	■ Grey	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-819269	VK/04350/WA/W/24/927	□ White	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64174-820269	VK/04350/WA/W/24/930	□ White	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-821269	VK/04350/WA/W/24/935	□ White	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-822269	VK/04350/WA/W/24/940	□ White	4000K	16.0W	2.167lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-823269	VK/04350/WA/B/24/927	■ Black	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64174-824269	VK/04350/WA/B/24/930	■ Black	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-825269	VK/04350/WA/B/24/935	■ Black	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-826269	VK/04350/WA/B/24/940	■ Black	4000K	16.0W	2.164lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-827269	VK/04350/WA/G/24/927	■ Grey	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64174-828269	VK/04350/WA/G/24/930	■ Grey	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-829269	VK/04350/WA/G/24/935	■ Grey	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-830269	VK/04350/WA/G/24/940	■ Grey	4000K	16.0W	2.164lm	D	24°	CRI>90	HEP 500mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-831269	VK/04350/WA/W/40/927	□ White	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64174-832269	VK/04350/WA/W/40/930	□ White	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-833269	VK/04350/WA/W/40/935	□ White	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-834269	VK/04350/WA/W/40/940	□ White	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-835269	VK/04350/WA/B/40/927	■ Black	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64174-836269	VK/04350/WA/B/40/930	■ Black	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-837269	VK/04350/WA/B/40/935	■ Black	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-838269	VK/04350/WA/B/40/940	■ Black	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-839269	VK/04350/WA/G/40/927	■ Grey	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64174-840269	VK/04350/WA/G/40/930	■ Grey	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-841269	VK/04350/WA/G/40/935	■ Grey	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-842269	VK/04350/WA/G/40/940	■ Grey	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs

Details


Voltage 220-240V. LED source **OSRAM**. Working temperature -20°C → 50°C. Lifetime 60.000hrs. Clicks 100.000.
Material Aluminium.

5 years guarantee




IP20.



VK/04350/18




VK/04350/24



VK/04350/40



VK/04350/HONEYCOMB

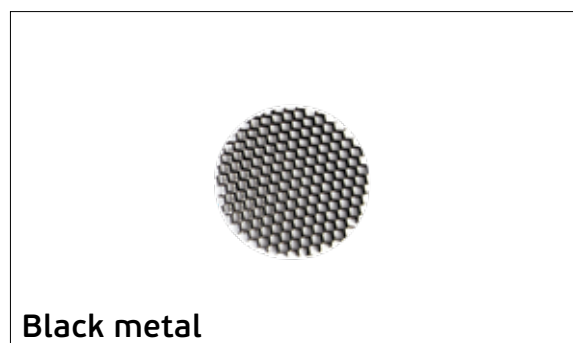


Product Models

Code	Model	Box
64174-742269	VK/04350/HONEYCOMB Black. Metal. Filter.	1pc

Details

Can be used to **VK/04350**. Material **Metal**.



Wall/Ceiling lights *LED Dimmable*



Ø6cm
18° 24° 40°

Flicker free

VK/04350/WA/D

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-799269	VK/04350/WA/D/W/18/927	□ White	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64174-843269	VK/04350/WA/D/W/18/930	□ White	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-844269	VK/04350/WA/D/W/18/935	□ White	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-845269	VK/04350/WA/D/W/18/940	□ White	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-846269	VK/04350/WA/D/B/18/927	■ Black	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64174-847269	VK/04350/WA/D/B/18/930	■ Black	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-848269	VK/04350/WA/D/B/18/935	■ Black	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-849269	VK/04350/WA/D/B/18/940	■ Black	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-850269	VK/04350/WA/D/G/18/927	■ Grey	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64174-851269	VK/04350/WA/D/G/18/930	■ Grey	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-852269	VK/04350/WA/D/G/18/935	■ Grey	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-853269	VK/04350/WA/D/G/18/940	■ Grey	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64174-854269	VK/04350/WA/D/W/24/927	□ White	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64174-855269	VK/04350/WA/D/W/24/930	□ White	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-856269	VK/04350/WA/D/W/24/935	□ White	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-857269	VK/04350/WA/D/W/24/940	□ White	4000K	16.0W	2.167lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-858269	VK/04350/WA/D/B/24/927	■ Black	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64174-859269	VK/04350/WA/D/B/24/930	■ Black	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-860269	VK/04350/WA/D/B/24/935	■ Black	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-861269	VK/04350/WA/D/B/24/940	■ Black	4000K	16.0W	2.164lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-862269	VK/04350/WA/D/G/24/927	■ Grey	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64174-863269	VK/04350/WA/D/G/24/930	■ Grey	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-864269	VK/04350/WA/D/G/24/935	■ Grey	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64174-865269	VK/04350/WA/D/G/24/940	■ Grey	4000K	16.0W	2.164lm	D	24°	CRI>90	HEP 500mA	6pcs


Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-866269	VK/04350/WA/D/W/40/927	□ White	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64174-867269	VK/04350/WA/D/W/40/930	□ White	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-868269	VK/04350/WA/D/W/40/935	□ White	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-869269	VK/04350/WA/D/W/40/940	□ White	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-870269	VK/04350/WA/D/B/40/927	■ Black	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64174-871269	VK/04350/WA/D/B/40/930	■ Black	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-872269	VK/04350/WA/D/B/40/935	■ Black	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-873269	VK/04350/WA/D/B/40/940	■ Black	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-874269	VK/04350/WA/D/G/40/927	■ Grey	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64174-875269	VK/04350/WA/D/G/40/930	■ Grey	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-876269	VK/04350/WA/D/G/40/935	■ Grey	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64174-877269	VK/04350/WA/D/G/40/940	■ Grey	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs

Details


Voltage 220-240V. LED source **OSRAM**. Working temperature -20°C→ 50°C. Lifetime 60.000hrs. Clicks 100.000.
Material Aluminium.

5 years guarantee    **IP20.**



VK/04350/18




VK/04350/24



VK/04350/40



VK/04350/HONEYCOMB

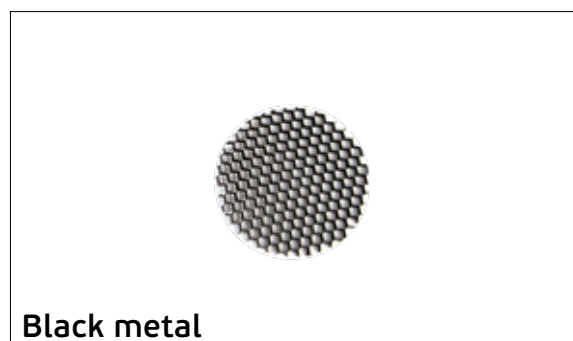


Product Models

Code	Model	Box
64174-742269	VK/04350/HONEYCOMB Black. Metal. Filter.	1pc

Details

Can be used to **VK/04350**. Material **Metal**.



Wall/Ceiling lights LED



ø8cm
18° 24° 40°

Flicker free

VK/04352/WA

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-878269	VK/04352/WA/W/18/927	□ White	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64174-879269	VK/04352/WA/W/18/930	□ White	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-880269	VK/04352/WA/W/18/935	□ White	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-881269	VK/04352/WA/W/18/940	□ White	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-882269	VK/04352/WA/W/18/865	□ White	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64174-883269	VK/04352/WA/B/18/927	■ Black	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64174-884269	VK/04352/WA/B/18/930	■ Black	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-885269	VK/04352/WA/B/18/935	■ Black	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-886269	VK/04352/WA/B/18/940	■ Black	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-887269	VK/04352/WA/B/18/865	■ Black	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64174-888269	VK/04352/WA/G/18/927	■ Grey	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64174-889269	VK/04352/WA/G/18/930	■ Grey	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-890269	VK/04352/WA/G/18/935	■ Grey	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-891269	VK/04352/WA/G/18/940	■ Grey	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-892269	VK/04352/WA/G/18/865	■ Grey	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64174-893269	VK/04352/WA/W/24/927	□ White	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64174-894269	VK/04352/WA/W/24/930	□ White	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-895269	VK/04352/WA/W/24/935	□ White	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-896269	VK/04352/WA/W/24/940	□ White	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-897269	VK/04352/WA/W/24/865	□ White	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs
64174-898269	VK/04352/WA/B/24/927	■ Black	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64174-899269	VK/04352/WA/B/24/930	■ Black	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-900269	VK/04352/WA/B/24/935	■ Black	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-901269	VK/04352/WA/B/24/940	■ Black	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-902269	VK/04352/WA/B/24/865	■ Black	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-903269	VK/04352/WA/G/24/927	■ Grey	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64174-904269	VK/04352/WA/G/24/930	■ Grey	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-905269	VK/04352/WA/G/24/935	■ Grey	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-906269	VK/04352/WA/G/24/940	■ Grey	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-907269	VK/04352/WA/G/24/865	■ Grey	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs
64174-908269	VK/04352/WA/W/40/927	□ White	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64174-909269	VK/04352/WA/W/40/930	□ White	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-910269	VK/04352/WA/W/40/935	□ White	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-911269	VK/04352/WA/W/40/940	□ White	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-912269	VK/04352/WA/W/40/865	□ White	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs
64174-913269	VK/04352/WA/B/40/927	■ Black	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64174-914269	VK/04352/WA/B/40/930	■ Black	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-915269	VK/04352/WA/B/40/935	■ Black	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-916269	VK/04352/WA/B/40/940	■ Black	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-917269	VK/04352/WA/B/40/865	■ Black	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs
64174-918269	VK/04352/WA/G/40/927	■ Grey	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64174-919269	VK/04352/WA/G/40/930	■ Grey	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-920269	VK/04352/WA/G/40/935	■ Grey	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-921269	VK/04352/WA/G/40/940	■ Grey	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-922269	VK/04352/WA/G/40/865	■ Grey	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs

Details

Voltage 220-240V. LED source **OSRAM**. Working temperature -20°C → 50°C. Lifetime 60.000hrs. Clicks 100.000.
Material Aluminium.


5 years guarantee




Adjustable

IP20.



VK/04352/18



VK/04352/24



VK/04352/40



VK/04352/HONEYCOMB

Product Models

Code
64174-770269

Model
VK/04352/HONEYCOMB
Black. Metal. Filter.

Box
1pc

Details

Can be used to **VK/04352**. Material **Metal**.

Black metal



Wall/Ceiling lights *LED Dimmable*



ø8cm
18° 24° 40°

Flicker free

VK/04352/WA/D

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-923269	VK/04352/WA/D/W/18/927	□ White	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64174-924269	VK/04352/WA/D/W/18/930	□ White	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-925269	VK/04352/WA/D/W/18/935	□ White	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-926269	VK/04352/WA/D/W/18/940	□ White	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-927269	VK/04352/WA/D/W/18/865	□ White	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64174-928269	VK/04352/WA/D/B/18/927	■ Black	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64174-929269	VK/04352/WA/D/B/18/930	■ Black	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-930269	VK/04352/WA/D/B/18/935	■ Black	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-931269	VK/04352/WA/D/B/18/940	■ Black	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-932269	VK/04352/WA/D/B/18/865	■ Black	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64174-933269	VK/04352/WA/D/G/18/927	■ Grey	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64174-934269	VK/04352/WA/D/G/18/930	■ Grey	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-935269	VK/04352/WA/D/G/18/935	■ Grey	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-936269	VK/04352/WA/D/G/18/940	■ Grey	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64174-937269	VK/04352/WA/D/G/18/865	■ Grey	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64174-938269	VK/04352/WA/D/W/24/927	□ White	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64174-939269	VK/04352/WA/D/W/24/930	□ White	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-940269	VK/04352/WA/D/W/24/935	□ White	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-941269	VK/04352/WA/D/W/24/940	□ White	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-942269	VK/04352/WA/D/W/24/865	□ White	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs
64174-943269	VK/04352/WA/D/B/24/927	■ Black	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64174-944269	VK/04352/WA/D/B/24/930	■ Black	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-945269	VK/04352/WA/D/B/24/935	■ Black	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-946269	VK/04352/WA/D/B/24/940	■ Black	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-947269	VK/04352/WA/D/B/24/865	■ Black	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs


Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-948269	VK/04352/WA/D/G/24/927	■ Grey	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64174-949269	VK/04352/WA/D/G/24/930	■ Grey	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-950269	VK/04352/WA/D/G/24/935	■ Grey	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-951269	VK/04352/WA/D/G/24/940	■ Grey	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64174-952269	VK/04352/WA/D/G/24/865	■ Grey	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs
64174-953269	VK/04352/WA/D/W/40/927	□ White	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64174-954269	VK/04352/WA/D/W/40/930	□ White	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-955269	VK/04352/WA/D/W/40/935	□ White	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-956269	VK/04352/WA/D/W/40/940	□ White	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-957269	VK/04352/WA/D/W/40/865	□ White	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs
64174-958269	VK/04352/WA/D/B/40/927	■ Black	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64174-959269	VK/04352/WA/D/B/40/930	■ Black	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-960269	VK/04352/WA/D/B/40/935	■ Black	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-961269	VK/04352/WA/D/B/40/940	■ Black	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-962269	VK/04352/WA/D/B/40/865	■ Black	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs
64174-963269	VK/04352/WA/D/G/40/927	■ Grey	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64174-964269	VK/04352/WA/D/G/40/930	■ Grey	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-965269	VK/04352/WA/D/G/40/935	■ Grey	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-966269	VK/04352/WA/D/G/40/940	■ Grey	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64174-967269	VK/04352/WA/D/G/40/865	■ Grey	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs

Details


Voltage 220-240V. LED source **OSRAM**. Working temperature -20°C → 50°C. Lifetime 60.000hrs. Clicks 100.000.
Material Aluminium.





VK/04352/18



VK/04352/24



VK/04352/40



VK/04352/HONEYCOMB

Product Models

Code	Model	Box
64174-770269	VK/04352/HONEYCOMB Black. Metal. Filter.	1pc

Details

Can be used to VK/04352. Material Metal.



Black metal



Wall/Ceiling lights LED



ø12cm
18° 24° 40°

Flicker free

VK/04354/WA

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-968269	VK/04354/WA/W/18/927	□ White	2700K	39.20W	4.257lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-969269	VK/04354/WA/W/18/930	□ White	3000K	39.10W	4.295lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-970269	VK/04354/WA/W/18/935	□ White	3500K	39.00W	4.377lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-971269	VK/04354/WA/W/18/940	□ White	4000K	38.80W	4.467lm	D	18°	CRI>90	OSRAM 1050mA	6pcs
64174-972269	VK/04354/WA/B/18/927	■ Black	2700K	39.20W	4.257lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-973269	VK/04354/WA/B/18/930	■ Black	3000K	39.10W	4.295lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-974269	VK/04354/WA/B/18/935	■ Black	3500K	39.00W	4.377lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-975269	VK/04354/WA/B/18/940	■ Black	4000K	38.80W	4.467lm	D	18°	CRI>90	OSRAM 1050mA	6pcs
64174-976269	VK/04354/WA/G/18/927	■ Grey	2700K	39.20W	4.257lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-977269	VK/04354/WA/G/18/930	■ Grey	3000K	39.10W	4.295lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-978269	VK/04354/WA/G/18/935	■ Grey	3500K	39.00W	4.377lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64174-979269	VK/04354/WA/G/18/940	■ Grey	4000K	38.80W	4.467lm	D	18°	CRI>90	OSRAM 1050mA	6pcs
64175-427269	VK/04354/WA/W/24/927	□ White	2700K	39.20W	4.257lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-428269	VK/04354/WA/W/24/930	□ White	3000K	39.10W	4.295lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-429269	VK/04354/WA/W/24/935	□ White	3500K	39.00W	4.377lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-430269	VK/04354/WA/W/24/940	□ White	4000K	38.80W	4.467lm	D	24°	CRI>90	OSRAM 1050mA	6pcs
64175-431269	VK/04354/WA/B/24/927	■ Black	2700K	39.20W	4.257lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-432269	VK/04354/WA/B/24/930	■ Black	3000K	39.10W	4.295lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-433269	VK/04354/WA/B/24/935	■ Black	3500K	39.00W	4.377lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-434269	VK/04354/WA/B/24/940	■ Black	4000K	38.80W	4.467lm	D	24°	CRI>90	OSRAM 1050mA	6pcs
64175-435269	VK/04354/WA/G/24/927	■ Grey	2700K	39.20W	4.257lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-436269	VK/04354/WA/G/24/930	■ Grey	3000K	39.10W	4.295lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-437269	VK/04354/WA/G/24/935	■ Grey	3500K	39.00W	4.377lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-438269	VK/04354/WA/G/24/940	■ Grey	4000K	38.80W	4.467lm	D	24°	CRI>90	OSRAM 1050mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-980269	VK/04354/WA/W/40/927	□ White	2700K	39.20W	4.257lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-981269	VK/04354/WA/W/40/930	□ White	3000K	39.10W	4.295lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-982269	VK/04354/WA/W/40/935	□ White	3500K	39.00W	4.377lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-983269	VK/04354/WA/W/40/940	□ White	4000K	38.80W	4.467lm	D	40°	CRI>90	OSRAM 1050mA	6pcs
64174-984269	VK/04354/WA/B/40/927	■ Black	2700K	39.20W	4.257lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-985269	VK/04354/WA/B/40/930	■ Black	3000K	39.10W	4.295lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-986269	VK/04354/WA/B/40/935	■ Black	3500K	39.00W	4.377lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-987269	VK/04354/WA/B/40/940	■ Black	4000K	38.80W	4.467lm	D	40°	CRI>90	OSRAM 1050mA	6pcs
64174-988269	VK/04354/WA/G/40/927	■ Grey	2700K	39.20W	4.257lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-989269	VK/04354/WA/G/40/930	■ Grey	3000K	39.10W	4.295lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-990269	VK/04354/WA/G/40/935	■ Grey	3500K	39.00W	4.377lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64174-991269	VK/04354/WA/G/40/940	■ Grey	4000K	38.80W	4.467lm	D	40°	CRI>90	OSRAM 1050mA	6pcs

Details


Voltage 220-240V. LED source **OSRAM**. Working temperature -20°C → 50°C. Lifetime 60.000hrs. Clicks 100.000. Material Aluminium.

5 years guarantee




IP20.



VK/04354/18




VK/04354/24



VK/04354/40



VK/04354/HONEYCOMB

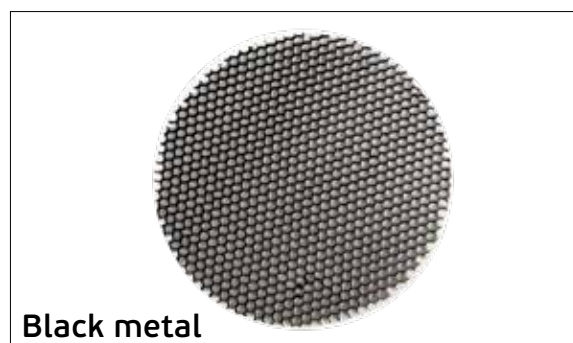


Product Models

Code	Model	Box
64174-798269	VK/04354/HONEYCOMB	1pc
	Black. Metal. Filter.	

Details

Can be used to **VK/04354**. Material **Metal**.





ø12cm
18° 24° 40°

Flicker free

VK/04354/WA/D

Product Models										
Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64174-992269	VK/04354/WA/D/W/18/927	□ White	2700K	29.80W	3.163lm	E	18°	CRI>90	HEP 800mA	6pcs
64174-993269	VK/04354/WA/D/W/18/930	□ White	3000K	29.70W	3.512lm	D	18°	CRI>90	HEP 800mA	6pcs
64174-994269	VK/04354/WA/D/W/18/935	□ White	3500K	29.70W	3.265lm	E	18°	CRI>90	HEP 800mA	6pcs
64174-995269	VK/04354/WA/D/W/18/940	□ White	4000K	29.60W	3.344lm	E	18°	CRI>90	HEP 800mA	6pcs
64174-996269	VK/04354/WA/D/B/18/927	■ Black	2700K	29.80W	3.163lm	E	18°	CRI>90	HEP 800mA	6pcs
64174-997269	VK/04354/WA/D/B/18/930	■ Black	3000K	29.70W	3.512lm	D	18°	CRI>90	HEP 800mA	6pcs
64174-998269	VK/04354/WA/D/B/18/935	■ Black	3500K	29.70W	3.265lm	E	18°	CRI>90	HEP 800mA	6pcs
64174-999269	VK/04354/WA/D/B/18/940	■ Black	4000K	29.60W	3.344lm	E	18°	CRI>90	HEP 800mA	6pcs
64175-001269	VK/04354/WA/D/G/18/927	■ Grey	2700K	29.80W	3.163lm	E	18°	CRI>90	HEP 800mA	6pcs
64175-002269	VK/04354/WA/D/G/18/930	■ Grey	3000K	29.70W	3.512lm	D	18°	CRI>90	HEP 800mA	6pcs
64175-003269	VK/04354/WA/D/G/18/935	■ Grey	3500K	29.70W	3.265lm	E	18°	CRI>90	HEP 800mA	6pcs
64175-004269	VK/04354/WA/D/G/18/940	■ Grey	4000K	29.60W	3.344lm	E	18°	CRI>90	HEP 800mA	6pcs
64175-005269	VK/04354/WA/D/W/24/927	□ White	2700K	29.80W	3.163lm	E	24°	CRI>90	HEP 800mA	6pcs
64175-006269	VK/04354/WA/D/W/24/930	□ White	3000K	29.70W	3.512lm	D	24°	CRI>90	HEP 800mA	6pcs
64175-007269	VK/04354/WA/D/W/24/935	□ White	3500K	29.70W	3.265lm	E	24°	CRI>90	HEP 800mA	6pcs
64175-008269	VK/04354/WA/D/W/24/940	□ White	4000K	29.60W	3.344lm	E	24°	CRI>90	HEP 800mA	6pcs
64175-009269	VK/04354/WA/D/B/24/927	■ Black	2700K	29.80W	3.163lm	E	24°	CRI>90	HEP 800mA	6pcs
64175-010269	VK/04354/WA/D/B/24/930	■ Black	3000K	29.70W	3.512lm	D	24°	CRI>90	HEP 800mA	6pcs
64175-011269	VK/04354/WA/D/B/24/935	■ Black	3500K	29.70W	3.265lm	E	24°	CRI>90	HEP 800mA	6pcs
64175-012269	VK/04354/WA/D/B/24/940	■ Black	4000K	29.60W	3.344lm	E	24°	CRI>90	HEP 800mA	6pcs
64175-013269	VK/04354/WA/D/G/24/927	■ Grey	2700K	29.80W	3.163lm	E	24°	CRI>90	HEP 800mA	6pcs
64175-014269	VK/04354/WA/D/G/24/930	■ Grey	3000K	29.70W	3.512lm	D	24°	CRI>90	HEP 800mA	6pcs
64175-015269	VK/04354/WA/D/G/24/935	■ Grey	3500K	29.70W	3.265lm	E	24°	CRI>90	HEP 800mA	6pcs
64175-016269	VK/04354/WA/D/G/24/940	■ Grey	4000K	29.60W	3.344lm	E	24°	CRI>90	HEP 800mA	6pcs


Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-017269	VK/04354/WA/D/W/40/927	□ White	2700K	29.80W	3.163lm	E	40°	CRI>90	HEP 800mA	6pcs
64175-018269	VK/04354/WA/D/W/40/930	□ White	3000K	29.70W	3.512lm	D	40°	CRI>90	HEP 800mA	6pcs
64175-019269	VK/04354/WA/D/W/40/935	□ White	3500K	29.70W	3.265lm	E	40°	CRI>90	HEP 800mA	6pcs
64175-020269	VK/04354/WA/D/W/40/940	□ White	4000K	29.60W	3.344lm	E	40°	CRI>90	HEP 800mA	6pcs
64175-021269	VK/04354/WA/D/B/40/927	■ Black	2700K	29.80W	3.163lm	E	40°	CRI>90	HEP 800mA	6pcs
64175-022269	VK/04354/WA/D/B/40/930	■ Black	3000K	29.70W	3.512lm	D	40°	CRI>90	HEP 800mA	6pcs
64175-023269	VK/04354/WA/D/B/40/935	■ Black	3500K	29.70W	3.265lm	E	40°	CRI>90	HEP 800mA	6pcs
64175-024269	VK/04354/WA/D/B/40/940	■ Black	4000K	29.60W	3.344lm	E	40°	CRI>90	HEP 800mA	6pcs
64175-025269	VK/04354/WA/D/G/40/927	■ Grey	2700K	29.80W	3.163lm	E	40°	CRI>90	HEP 800mA	6pcs
64175-026269	VK/04354/WA/D/G/40/930	■ Grey	3000K	29.70W	3.512lm	D	40°	CRI>90	HEP 800mA	6pcs
64175-027269	VK/04354/WA/D/G/40/935	■ Grey	3500K	29.70W	3.265lm	E	40°	CRI>90	HEP 800mA	6pcs
64175-028269	VK/04354/WA/D/G/40/940	■ Grey	4000K	29.60W	3.344lm	E	40°	CRI>90	HEP 800mA	6pcs

Details


Voltage 220-240V. LED source **OSRAM**. Working temperature -20°C → 50°C. Lifetime 60.000hrs. Clicks 100.000. Material Aluminium.

5 years guarantee   **IP20.**



VK/04354/18




VK/04354/24



VK/04354/40



VK/04354/HONEYCOMB

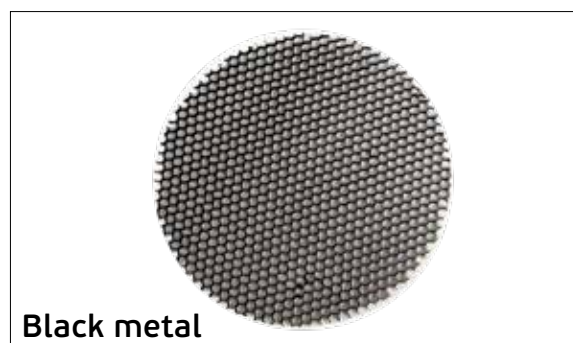


Product Models

Code	Model	Box
64174-798269	VK/04354/HONEYCOMB Black. Metal. Filter.	1pc

Details

Can be used to **VK/04354**. Material **Metal**.



▲ Η VK Leading Light έχει αναπτύξει ειδική μονάδα παραγωγής και κατασκευής φωτιστικών οροφής και κρεμαστών με γρήγορους χρόνους παράδοσης. Υπάρχει δυνατότητα κατασκευής, σε διάφορα μήκη έτσι ώστε να προσαρμόζονται στις απαιτήσεις των έργων, ειδικές βαφές (RAL), CRI, πιο πολλά lumen και Kelvin σύμφωνα με τις ανάγκες των μελετών.

▲ VK Leading Light has developed a special unit for the production and manufacture of ceiling and suspended luminaires with fast delivery times. It is possible to build, in different lengths so as to adapt to the requirements of the projects, special paints (RAL), CRI, more lumens and Kelvin according to the needs of the studies.



*led ceiling/pendant
lighting*

Ceiling lights LED



ø6cm
18° 24° 40°

Flicker free

VK/04350/CE/.../15		Product Models								
Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-029269	VK/04350/CE/W/18/927/15	□ White	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64175-030269	VK/04350/CE/W/18/930/15	□ White	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-031269	VK/04350/CE/W/18/935/15	□ White	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-032269	VK/04350/CE/W/18/940/15	□ White	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-033269	VK/04350/CE/B/18/927/15	■ Black	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64175-034269	VK/04350/CE/B/18/930/15	■ Black	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-035269	VK/04350/CE/B/18/935/15	■ Black	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-036269	VK/04350/CE/B/18/940/15	■ Black	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-037269	VK/04350/CE/G/18/927/15	■ Grey	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64175-038269	VK/04350/CE/G/18/930/15	■ Grey	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-039269	VK/04350/CE/G/18/935/15	■ Grey	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-040269	VK/04350/CE/G/18/940/15	■ Grey	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-041269	VK/04350/CE/W/24/927/15	□ White	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64175-042269	VK/04350/CE/W/24/930/15	□ White	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-043269	VK/04350/CE/W/24/935/15	□ White	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-044269	VK/04350/CE/W/24/940/15	□ White	4000K	16.0W	2.167lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-045269	VK/04350/CE/B/24/927/15	■ Black	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64175-046269	VK/04350/CE/B/24/930/15	■ Black	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-047269	VK/04350/CE/B/24/935/15	■ Black	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-048269	VK/04350/CE/B/24/940/15	■ Black	4000K	16.0W	2.164lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-049269	VK/04350/CE/G/24/927/15	■ Grey	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64175-050269	VK/04350/CE/G/24/930/15	■ Grey	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-051269	VK/04350/CE/G/24/935/15	■ Grey	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-052269	VK/04350/CE/G/24/940/15	■ Grey	4000K	16.0W	2.164lm	D	24°	CRI>90	HEP 500mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-053269	VK/04350/CE/W/40/927/15	□ White	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64175-054269	VK/04350/CE/W/40/930/15	□ White	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-055269	VK/04350/CE/W/40/935/15	□ White	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-056269	VK/04350/CE/W/40/940/15	□ White	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-057269	VK/04350/CE/B/40/927/15	■ Black	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64175-058269	VK/04350/CE/B/40/930/15	■ Black	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-059269	VK/04350/CE/B/40/935/15	■ Black	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-060269	VK/04350/CE/B/40/940/15	■ Black	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-061269	VK/04350/CE/G/40/927/15	■ Grey	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64175-062269	VK/04350/CE/G/40/930/15	■ Grey	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-063269	VK/04350/CE/G/40/935/15	■ Grey	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-064269	VK/04350/CE/G/40/940/15	■ Grey	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs

Details


Voltage 220-240V. LED source **OSRAM**. Working temperature -20°C → 50°C. Lifetime 60.000hrs. Clicks 100.000. Material Aluminium.

5 years guarantee




IP20.

15
cm




ø6cm


VK/04350/18



VK/04350/24



VK/04350/40



VK/04350/HONEYCOMB

Product Models

Code	Model	Box
64174-742269	VK/04350/HONEYCOMB Black. Metal. Filter.	1pc

Details

Can be used to VK/04350. Material Metal.



Black metal

ø5.9
cm





ø6cm
18° 24° 40°

Flicker free

VK/04350/CE/D/.../15										
Product Models										
Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-065269	VK/04350/CE/D/W/18/927/15	□ White	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64175-066269	VK/04350/CE/D/W/18/930/15	□ White	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-067269	VK/04350/CE/D/W/18/935/15	□ White	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-068269	VK/04350/CE/D/W/18/940/15	□ White	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-069269	VK/04350/CE/D/B/18/927/15	■ Black	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64175-070269	VK/04350/CE/D/B/18/930/15	■ Black	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-071269	VK/04350/CE/D/B/18/935/15	■ Black	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-072269	VK/04350/CE/D/B/18/940/15	■ Black	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-073269	VK/04350/CE/D/G/18/927/15	■ Grey	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64175-074269	VK/04350/CE/D/G/18/930/15	■ Grey	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-075269	VK/04350/CE/D/G/18/935/15	■ Grey	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-076269	VK/04350/CE/D/G/18/940/15	■ Grey	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-077269	VK/04350/CE/D/W/24/927/15	□ White	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64175-078269	VK/04350/CE/D/W/24/930/15	□ White	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-079269	VK/04350/CE/D/W/24/935/15	□ White	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-080269	VK/04350/CE/D/W/24/940/15	□ White	4000K	16.0W	2.167lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-081269	VK/04350/CE/D/B/24/927/15	■ Black	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64175-082269	VK/04350/CE/D/B/24/930/15	■ Black	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-083269	VK/04350/CE/D/B/24/935/15	■ Black	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-084269	VK/04350/CE/D/B/24/940/15	■ Black	4000K	16.0W	2.164lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-085269	VK/04350/CE/D/G/24/927/15	■ Grey	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64175-086269	VK/04350/CE/D/G/24/930/15	■ Grey	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-087269	VK/04350/CE/D/G/24/935/15	■ Grey	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-088269	VK/04350/CE/D/G/24/940/15	■ Grey	4000K	16.0W	2.164lm	D	24°	CRI>90	HEP 500mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-089269	VK/04350/CE/D/W/40/927/15	□ White	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64175-090269	VK/04350/CE/D/W/40/930/15	□ White	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-091269	VK/04350/CE/D/W/40/935/15	□ White	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-092269	VK/04350/CE/D/W/40/940/15	□ White	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-093269	VK/04350/CE/D/B/40/927/15	■ Black	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64175-094269	VK/04350/CE/D/B/40/930/15	■ Black	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-095269	VK/04350/CE/D/B/40/935/15	■ Black	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-096269	VK/04350/CE/D/B/40/940/15	■ Black	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-097269	VK/04350/CE/D/G/40/927/15	■ Grey	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64175-098269	VK/04350/CE/D/G/40/930/15	■ Grey	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-099269	VK/04350/CE/D/G/40/935/15	■ Grey	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-100269	VK/04350/CE/D/G/40/940/15	■ Grey	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs

Details


Voltage 220-240V. LED source **OSRAM**. Working temperature -20°C→ 50°C. Lifetime 60.000hrs. Clicks 100.000.
Material Aluminium.

5 years guarantee   **IP20.**


15
cm

ø6cm


VK/04350/18



VK/04350/24



VK/04350/40



VK/04350/HONEYCOMB

Product Models

Code	Model	Box
64174-742269	VK/04350/HONEYCOMB Black. Metal. Filter.	1pc

Details

Can be used to **VK/04350**. Material **Metal**.

Black metal

ø5.9
cm

Ceiling lights LED



ø8cm
18° 24° 40°

Flicker free

VK/04352/CE/.../17Product Models										
Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-101269	VK/04352/CE/W/18/927/17	□ White	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64175-102269	VK/04352/CE/W/18/930/17	□ White	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-103269	VK/04352/CE/W/18/935/17	□ White	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-104269	VK/04352/CE/W/18/940/17	□ White	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-105269	VK/04352/CE/W/18/865/17	□ White	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64175-106269	VK/04352/CE/B/18/927/17	■ Black	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64175-107269	VK/04352/CE/B/18/930/17	■ Black	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-108269	VK/04352/CE/B/18/935/17	■ Black	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-109269	VK/04352/CE/B/18/940/17	■ Black	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-110269	VK/04352/CE/B/18/865/17	■ Black	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64175-111269	VK/04352/CE/G/18/927/17	■ Grey	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64175-112269	VK/04352/CE/G/18/930/17	■ Grey	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-113269	VK/04352/CE/G/18/935/17	■ Grey	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-114269	VK/04352/CE/G/18/940/17	■ Grey	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-115269	VK/04352/CE/G/18/865/17	■ Grey	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64175-116269	VK/04352/CE/W/24/927/17	□ White	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64175-117269	VK/04352/CE/W/24/930/17	□ White	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-118269	VK/04352/CE/W/24/935/17	□ White	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-119269	VK/04352/CE/W/24/940/17	□ White	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-120269	VK/04352/CE/W/24/865/17	□ White	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs
64175-121269	VK/04352/CE/B/24/927/17	■ Black	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64175-122269	VK/04352/CE/B/24/930/17	■ Black	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-123269	VK/04352/CE/B/24/935/17	■ Black	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-124269	VK/04352/CE/B/24/940/17	■ Black	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-125269	VK/04352/CE/B/24/865/17	■ Black	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-126269	VK/04352/CE/G/24/927/17	■ Grey	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64175-127269	VK/04352/CE/G/24/930/17	■ Grey	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-128269	VK/04352/CE/G/24/935/17	■ Grey	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-129269	VK/04352/CE/G/24/940/17	■ Grey	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-130269	VK/04352/CE/G/24/865/17	■ Grey	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs
64175-131269	VK/04352/CE/W/40/927/17	□ White	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64175-132269	VK/04352/CE/W/40/930/17	□ White	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-133269	VK/04352/CE/W/40/935/17	□ White	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-134269	VK/04352/CE/W/40/940/17	□ White	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-135269	VK/04352/CE/W/40/865/17	□ White	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs
64175-136269	VK/04352/CE/B/40/927/17	■ Black	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64175-137269	VK/04352/CE/B/40/930/17	■ Black	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-138269	VK/04352/CE/B/40/935/17	■ Black	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-139269	VK/04352/CE/B/40/940/17	■ Black	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-140269	VK/04352/CE/B/40/865/17	■ Black	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs
64175-141269	VK/04352/CE/G/40/927/17	■ Grey	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64175-142269	VK/04352/CE/G/40/930/17	■ Grey	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-143269	VK/04352/CE/G/40/935/17	■ Grey	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-144269	VK/04352/CE/G/40/940/17	■ Grey	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-145269	VK/04352/CE/G/40/865/17	■ Grey	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs

Details


Voltage 220-240V. LED source **OSRAM**. Working temperature -20°C → 50°C. Lifetime 60.000hrs. Clicks 100.000.
Material Aluminium.

5 years guarantee   **IP20.**


17
cm

ø8cm


VK/04352/18



VK/04352/24



VK/04352/40



VK/04352/HONEYCOMB

Product Models

Code
64174-770269

Model
VK/04352/HONEYCOMB
Black. Metal. Filter.

Box
1pc

Details

Can be used to **VK/04352**. Material **Metal**.

Black metal

ø7.9
cm

Ceiling lights *LED Dimmable*



ø8cm
18° 24° 40°

Flicker free

VK/04352/CE/D/.../17

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-146269	VK/04352/CE/D/W/18/927/17	□ White	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64175-147269	VK/04352/CE/D/W/18/930/17	□ White	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-148269	VK/04352/CE/D/W/18/935/17	□ White	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-149269	VK/04352/CE/D/W/18/940/17	□ White	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-150269	VK/04352/CE/D/W/18/865/17	□ White	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64175-151269	VK/04352/CE/D/B/18/927/17	■ Black	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64175-152269	VK/04352/CE/D/B/18/930/17	■ Black	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-153269	VK/04352/CE/D/B/18/935/17	■ Black	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-154269	VK/04352/CE/D/B/18/940/17	■ Black	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-155269	VK/04352/CE/D/B/18/865/17	■ Black	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64175-156269	VK/04352/CE/D/G/18/927/17	■ Grey	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64175-157269	VK/04352/CE/D/G/18/930/17	■ Grey	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-158269	VK/04352/CE/D/G/18/935/17	■ Grey	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-159269	VK/04352/CE/D/G/18/940/17	■ Grey	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-160269	VK/04352/CE/D/G/18/865/17	■ Grey	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64175-161269	VK/04352/CE/D/W/24/927/17	□ White	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64175-162269	VK/04352/CE/D/W/24/930/17	□ White	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-163269	VK/04352/CE/D/W/24/935/17	□ White	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-164269	VK/04352/CE/D/W/24/940/17	□ White	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-165269	VK/04352/CE/D/W/24/865/17	□ White	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs
64175-166269	VK/04352/CE/D/B/24/927/17	■ Black	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64175-167269	VK/04352/CE/D/B/24/930/17	■ Black	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-168269	VK/04352/CE/D/B/24/935/17	■ Black	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-169269	VK/04352/CE/D/B/24/940/17	■ Black	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-170269	VK/04352/CE/D/B/24/865/17	■ Black	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-171269	VK/04352/CE/D/G/24/927/17	■ Grey	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64175-172269	VK/04352/CE/D/G/24/930/17	■ Grey	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-173269	VK/04352/CE/D/G/24/935/17	■ Grey	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-174269	VK/04352/CE/D/G/24/940/17	■ Grey	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-175269	VK/04352/CE/D/G/24/865/17	■ Grey	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs
64175-176269	VK/04352/CE/D/W/40/927/17	□ White	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64175-177269	VK/04352/CE/D/W/40/930/17	□ White	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-178269	VK/04352/CE/D/W/40/935/17	□ White	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-179269	VK/04352/CE/D/W/40/940/17	□ White	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-180269	VK/04352/CE/D/W/40/865/17	□ White	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs
64175-181269	VK/04352/CE/D/B/40/927/17	■ Black	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64175-182269	VK/04352/CE/D/B/40/930/17	■ Black	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-183269	VK/04352/CE/D/B/40/935/17	■ Black	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-184269	VK/04352/CE/D/B/40/940/17	■ Black	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-185269	VK/04352/CE/D/B/40/865/17	■ Black	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs
64175-186269	VK/04352/CE/D/G/40/927/17	■ Grey	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64175-187269	VK/04352/CE/D/G/40/930/17	■ Grey	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-188269	VK/04352/CE/D/G/40/935/17	■ Grey	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-189269	VK/04352/CE/D/G/40/940/17	■ Grey	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-190269	VK/04352/CE/D/G/40/865/17	■ Grey	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs

Details


Voltage 220-240V. LED source **OSRAM**. Working temperature -20°C → 50°C. Lifetime 60.000hrs. Clicks 100.000.
Material Aluminium.

5 years guarantee   **IP20.**


17
cm

ø8cm


VK/04352/18



VK/04352/24



VK/04352/40



VK/04352/HONEYCOMB

Product Models


Code
64174-770269

Model
VK/04352/HONEYCOMB
Black. Metal. Filter.

Box
1pc

Details

Can be used to **VK/04352**. Material **Metal**.

Black metalø7.9
cm

ø7.9cm

Ceiling lights LED



ø12cm
18° 24° 40°

Flicker free

VK/04354/CE/.../18

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-191269	VK/04354/CE/W/18/927/18	□ White	2700K	39.20W	4.257lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64175-192269	VK/04354/CE/W/18/930/18	□ White	3000K	39.10W	4.295lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64175-193269	VK/04354/CE/W/18/935/18	□ White	3500K	39.00W	4.377lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64175-194269	VK/04354/CE/W/18/940/18	□ White	4000K	38.80W	4.467lm	D	18°	CRI>90	OSRAM 1050mA	6pcs
64175-195269	VK/04354/CE/B/18/927/18	■ Black	2700K	39.20W	4.257lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64175-196269	VK/04354/CE/B/18/930/18	■ Black	3000K	39.10W	4.295lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64175-197269	VK/04354/CE/B/18/935/18	■ Black	3500K	39.00W	4.377lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64175-198269	VK/04354/CE/B/18/940/18	■ Black	4000K	38.80W	4.467lm	D	18°	CRI>90	OSRAM 1050mA	6pcs
64175-199269	VK/04354/CE/G/18/927/18	■ Grey	2700K	39.20W	4.257lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64175-200269	VK/04354/CE/G/18/930/18	■ Grey	3000K	39.10W	4.295lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64175-201269	VK/04354/CE/G/18/935/18	■ Grey	3500K	39.00W	4.377lm	E	18°	CRI>90	OSRAM 1050mA	6pcs
64175-202269	VK/04354/CE/G/18/940/18	■ Grey	4000K	38.80W	4.467lm	D	18°	CRI>90	OSRAM 1050mA	6pcs
64175-203269	VK/04354/CE/W/24/927/18	□ White	2700K	39.20W	4.257lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-204269	VK/04354/CE/W/24/930/18	□ White	3000K	39.10W	4.295lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-205269	VK/04354/CE/W/24/935/18	□ White	3500K	39.00W	4.377lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-206269	VK/04354/CE/W/24/940/18	□ White	4000K	38.80W	4.467lm	D	24°	CRI>90	OSRAM 1050mA	6pcs
64175-207269	VK/04354/CE/B/24/927/18	■ Black	2700K	39.20W	4.257lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-208269	VK/04354/CE/B/24/930/18	■ Black	3000K	39.10W	4.295lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-209269	VK/04354/CE/B/24/935/18	■ Black	3500K	39.00W	4.377lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-210269	VK/04354/CE/B/24/940/18	■ Black	4000K	38.80W	4.467lm	D	24°	CRI>90	OSRAM 1050mA	6pcs
64175-211269	VK/04354/CE/G/24/927/18	■ Grey	2700K	39.20W	4.257lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-212269	VK/04354/CE/G/24/930/18	■ Grey	3000K	39.10W	4.295lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-213269	VK/04354/CE/G/24/935/18	■ Grey	3500K	39.00W	4.377lm	E	24°	CRI>90	OSRAM 1050mA	6pcs
64175-214269	VK/04354/CE/G/24/940/18	■ Grey	4000K	38.80W	4.467lm	D	24°	CRI>90	OSRAM 1050mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-215269	VK/04354/CE/W/40/927/18	□ White	2700K	39.20W	4.257lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64175-216269	VK/04354/CE/W/40/930/18	□ White	3000K	39.10W	4.295lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64175-217269	VK/04354/CE/W/40/935/18	□ White	3500K	39.00W	4.377lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64175-218269	VK/04354/CE/W/40/940/18	□ White	4000K	38.80W	4.467lm	D	40°	CRI>90	OSRAM 1050mA	6pcs
64175-219269	VK/04354/CE/B/40/927/18	■ Black	2700K	39.20W	4.257lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64175-220269	VK/04354/CE/B/40/930/18	■ Black	3000K	39.10W	4.295lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64175-221269	VK/04354/CE/B/40/935/18	■ Black	3500K	39.00W	4.377lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64175-222269	VK/04354/CE/B/40/940/18	■ Black	4000K	38.80W	4.467lm	D	40°	CRI>90	OSRAM 1050mA	6pcs
64175-223269	VK/04354/CE/G/40/927/18	■ Grey	2700K	39.20W	4.257lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64175-224269	VK/04354/CE/G/40/930/18	■ Grey	3000K	39.10W	4.295lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64175-225269	VK/04354/CE/G/40/935/18	■ Grey	3500K	39.00W	4.377lm	E	40°	CRI>90	OSRAM 1050mA	6pcs
64175-226269	VK/04354/CE/G/40/940/18	■ Grey	4000K	38.80W	4.467lm	D	40°	CRI>90	OSRAM 1050mA	6pcs

Details

Voltage 220-240V. LED source **OSRAM**. Working temperature -20°C→ 50°C. Lifetime 60.000hrs. Clicks 100.000.
Material Aluminium.

5 years guarantee




IP20.

18
cm




12cm


VK/04354/18




VK/04354/24



VK/04354/40



VK/04354/HONEYCOMB




Black metal

Product Models

Code	Model	Box
64174-798269	VK/04354/HONEYCOMB Black. Metal. Filter.	1pc

Details

Can be used to **VK/04354**. Material **Metal**.



11.9
cm

11.9cm

Ceiling lights *LED Dimmable*



ø12cm
18° 24° 40°

Flicker free

VK/04354/CE/D/.../18

Product Models


Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-227269	VK/04354/CE/D/W/18/927/18	□ White	2700K	29.80W	3.163lm	E	18°	CRI>90	HEP 800mA	6pcs
64175-228269	VK/04354/CE/D/W/18/930/18	□ White	3000K	29.70W	3.512lm	D	18°	CRI>90	HEP 800mA	6pcs
64175-229269	VK/04354/CE/D/W/18/935/18	□ White	3500K	29.70W	3.265lm	E	18°	CRI>90	HEP 800mA	6pcs
64175-230269	VK/04354/CE/D/W/18/940/18	□ White	4000K	29.60W	3.344lm	E	18°	CRI>90	HEP 800mA	6pcs
64175-231269	VK/04354/CE/D/B/18/927/18	■ Black	2700K	29.80W	3.163lm	E	18°	CRI>90	HEP 800mA	6pcs
64175-232269	VK/04354/CE/D/B/18/930/18	■ Black	3000K	29.70W	3.512lm	D	18°	CRI>90	HEP 800mA	6pcs
64175-233269	VK/04354/CE/D/B/18/935/18	■ Black	3500K	29.70W	3.265lm	E	18°	CRI>90	HEP 800mA	6pcs
64175-234269	VK/04354/CE/D/B/18/940/18	■ Black	4000K	29.60W	3.344lm	E	18°	CRI>90	HEP 800mA	6pcs
64175-235269	VK/04354/CE/D/G/18/927/18	■ Grey	2700K	29.80W	3.163lm	E	18°	CRI>90	HEP 800mA	6pcs
64175-236269	VK/04354/CE/D/G/18/930/18	■ Grey	3000K	29.70W	3.512lm	D	18°	CRI>90	HEP 800mA	6pcs
64175-237269	VK/04354/CE/D/G/18/935/18	■ Grey	3500K	29.70W	3.265lm	E	18°	CRI>90	HEP 800mA	6pcs
64175-238269	VK/04354/CE/D/G/18/940/18	■ Grey	4000K	29.60W	3.344lm	E	18°	CRI>90	HEP 800mA	6pcs
64175-239269	VK/04354/CE/D/W/24/927/18	□ White	2700K	29.80W	3.163lm	E	24°	CRI>90	HEP 800mA	6pcs
64175-240269	VK/04354/CE/D/W/24/930/18	□ White	3000K	29.70W	3.512lm	D	24°	CRI>90	HEP 800mA	6pcs
64175-241269	VK/04354/CE/D/W/24/935/18	□ White	3500K	29.70W	3.265lm	E	24°	CRI>90	HEP 800mA	6pcs
64175-242269	VK/04354/CE/D/W/24/940/18	□ White	4000K	29.60W	3.344lm	E	24°	CRI>90	HEP 800mA	6pcs
64175-243269	VK/04354/CE/D/B/24/927/18	■ Black	2700K	29.80W	3.163lm	E	24°	CRI>90	HEP 800mA	6pcs
64175-244269	VK/04354/CE/D/B/24/930/18	■ Black	3000K	29.70W	3.512lm	D	24°	CRI>90	HEP 800mA	6pcs
64175-245269	VK/04354/CE/D/B/24/935/18	■ Black	3500K	29.70W	3.265lm	E	24°	CRI>90	HEP 800mA	6pcs
64175-246269	VK/04354/CE/D/B/24/940/18	■ Black	4000K	29.60W	3.344lm	E	24°	CRI>90	HEP 800mA	6pcs
64175-247269	VK/04354/CE/D/G/24/927/18	■ Grey	2700K	29.80W	3.163lm	E	24°	CRI>90	HEP 800mA	6pcs
64175-248269	VK/04354/CE/D/G/24/930/18	■ Grey	3000K	29.70W	3.512lm	D	24°	CRI>90	HEP 800mA	6pcs
64175-249269	VK/04354/CE/D/G/24/935/18	■ Grey	3500K	29.70W	3.265lm	E	24°	CRI>90	HEP 800mA	6pcs
64175-250269	VK/04354/CE/D/G/24/940/18	■ Grey	4000K	29.60W	3.344lm	E	24°	CRI>90	HEP 800mA	6pcs

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-251269	VK/04354/CE/D/W/40/927/18	□ White	2700K	29.80W	3.163lm	E	40°	CRI>90	HEP 800mA	6pcs
64175-252269	VK/04354/CE/D/W/40/930/18	□ White	3000K	29.70W	3.512lm	D	40°	CRI>90	HEP 800mA	6pcs
64175-253269	VK/04354/CE/D/W/40/935/18	□ White	3500K	29.70W	3.265lm	E	40°	CRI>90	HEP 800mA	6pcs
64175-254269	VK/04354/CE/D/W/40/940/18	□ White	4000K	29.60W	3.344lm	E	40°	CRI>90	HEP 800mA	6pcs
64175-255269	VK/04354/CE/D/B/40/927/18	■ Black	2700K	29.80W	3.163lm	E	40°	CRI>90	HEP 800mA	6pcs
64175-256269	VK/04354/CE/D/B/40/930/18	■ Black	3000K	29.70W	3.512lm	D	40°	CRI>90	HEP 800mA	6pcs
64175-257269	VK/04354/CE/D/B/40/935/18	■ Black	3500K	29.70W	3.265lm	E	40°	CRI>90	HEP 800mA	6pcs
64175-258269	VK/04354/CE/D/B/40/940/18	■ Black	4000K	29.60W	3.344lm	E	40°	CRI>90	HEP 800mA	6pcs
64175-259269	VK/04354/CE/D/G/40/927/18	■ Grey	2700K	29.80W	3.163lm	E	40°	CRI>90	HEP 800mA	6pcs
64175-260269	VK/04354/CE/D/G/40/930/18	■ Grey	3000K	29.70W	3.512lm	D	40°	CRI>90	HEP 800mA	6pcs
64175-261269	VK/04354/CE/D/G/40/935/18	■ Grey	3500K	29.70W	3.265lm	E	40°	CRI>90	HEP 800mA	6pcs
64175-262269	VK/04354/CE/D/G/40/940/18	■ Grey	4000K	29.60W	3.344lm	E	40°	CRI>90	HEP 800mA	6pcs


Details

Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20°C→ 50°C**. Lifetime **60.000hrs**. Clicks **100.000**. Material **Aluminium**.


5 years guarantee   **IP20.**




VK/04354/18




VK/04354/24



VK/04354/40



VK/04354/HONEYCOMB

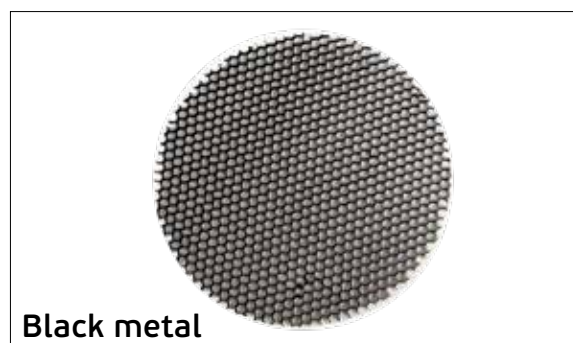


Product Models

Code	Model	Box
64174-798269	VK/04354/HONEYCOMB Black. Metal. Filter.	1pc

Details

Can be used to **VK/04354**. Material **Metal**.



Pendant lights LED

ø6cm
18° 24° 40°
Flicker free



VK/04350/PE/.../15

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-263269	VK/04350/PE/W/18/927/15	□ White	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64175-264269	VK/04350/PE/W/18/930/15	□ White	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-265269	VK/04350/PE/W/18/935/15	□ White	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-266269	VK/04350/PE/W/18/940/15	□ White	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-267269	VK/04350/PE/B/18/927/15	■ Black	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64175-268269	VK/04350/PE/B/18/930/15	■ Black	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-269269	VK/04350/PE/B/18/935/15	■ Black	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-270269	VK/04350/PE/B/18/940/15	■ Black	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-271269	VK/04350/PE/G/18/927/15	■ Grey	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64175-272269	VK/04350/PE/G/18/930/15	■ Grey	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-273269	VK/04350/PE/G/18/935/15	■ Grey	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-274269	VK/04350/PE/G/18/940/15	■ Grey	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-275269	VK/04350/PE/W/24/927/15	□ White	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64175-276269	VK/04350/PE/W/24/930/15	□ White	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-277269	VK/04350/PE/W/24/935/15	□ White	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-278269	VK/04350/PE/W/24/940/15	□ White	4000K	16.0W	2.167lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-279269	VK/04350/PE/B/24/927/15	■ Black	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64175-280269	VK/04350/PE/B/24/930/15	■ Black	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-281269	VK/04350/PE/B/24/935/15	■ Black	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-282269	VK/04350/PE/B/24/940/15	■ Black	4000K	16.0W	2.164lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-283269	VK/04350/PE/G/24/927/15	■ Grey	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64175-284269	VK/04350/PE/G/24/930/15	■ Grey	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-285269	VK/04350/PE/G/24/935/15	■ Grey	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-286269	VK/04350/PE/G/24/940/15	■ Grey	4000K	16.0W	2.164lm	D	24°	CRI>90	HEP 500mA	6pcs


Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-287269	VK/04350/PE/W/40/927/15	□ White	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64175-288269	VK/04350/PE/W/40/930/15	□ White	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-289269	VK/04350/PE/W/40/935/15	□ White	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-290269	VK/04350/PE/W/40/940/15	□ White	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-291269	VK/04350/PE/B/40/927/15	■ Black	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64175-292269	VK/04350/PE/B/40/930/15	■ Black	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-293269	VK/04350/PE/B/40/935/15	■ Black	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-294269	VK/04350/PE/B/40/940/15	■ Black	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-295269	VK/04350/PE/G/40/927/15	■ Grey	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64175-296269	VK/04350/PE/G/40/930/15	■ Grey	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-297269	VK/04350/PE/G/40/935/15	■ Grey	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-298269	VK/04350/PE/G/40/940/15	■ Grey	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs

Details


Voltage 220-240V. LED source **OSRAM**. Working temperature -20°C→ 50°C. Lifetime 60.000hrs. Clicks 100.000. Material Aluminium.

5 years guarantee   **IP20.**



VK/04350/18




VK/04350/24



VK/04350/40



VK/04350/HONEYCOMB

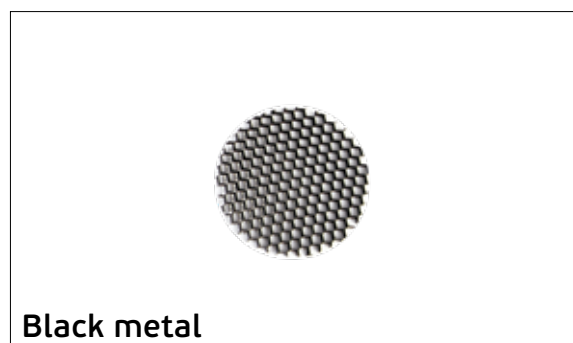


Product Models

Code	Model	Box
64174-742269	VK/04350/HONEYCOMB Black. Metal. Filter.	1pc

Details

Can be used to **VK/04350**. Material **Metal**.



Pendant lights LED Dimmable

ø6cm
18° 24° 40°
Flicker free



VK/04350/PE/D/.../15

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy_class	Degrees	CRI	Driver	Box
64175-299269	VK/04350/PE/D/W/18/927/15	□ White	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64175-300269	VK/04350/PE/D/W/18/930/15	□ White	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-301269	VK/04350/PE/D/W/18/935/15	□ White	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-302269	VK/04350/PE/D/W/18/940/15	□ White	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-303269	VK/04350/PE/D/B/18/927/15	■ Black	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64175-304269	VK/04350/PE/D/B/18/930/15	■ Black	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-305269	VK/04350/PE/D/B/18/935/15	■ Black	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-306269	VK/04350/PE/D/B/18/940/15	■ Black	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-307269	VK/04350/PE/D/G/18/927/15	■ Grey	2700K	18.5W	1.958lm	E	18°	CRI>90	HEP 500mA	6pcs
64175-308269	VK/04350/PE/D/G/18/930/15	■ Grey	3000K	17.1W	2.052lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-309269	VK/04350/PE/D/G/18/935/15	■ Grey	3500K	16.4W	2.124lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-310269	VK/04350/PE/D/G/18/940/15	■ Grey	4000K	16.0W	2.167lm	D	18°	CRI>90	HEP 500mA	6pcs
64175-311269	VK/04350/PE/D/W/24/927/15	□ White	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64175-312269	VK/04350/PE/D/W/24/930/15	□ White	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-313269	VK/04350/PE/D/W/24/935/15	□ White	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-314269	VK/04350/PE/D/W/24/940/15	□ White	4000K	16.0W	2.167lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-315269	VK/04350/PE/D/B/24/927/15	■ Black	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64175-316269	VK/04350/PE/D/B/24/930/15	■ Black	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-317269	VK/04350/PE/D/B/24/935/15	■ Black	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-318269	VK/04350/PE/D/B/24/940/15	■ Black	4000K	16.0W	2.164lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-319269	VK/04350/PE/D/G/24/927/15	■ Grey	2700K	18.5W	1.958lm	E	24°	CRI>90	HEP 500mA	6pcs
64175-320269	VK/04350/PE/D/G/24/930/15	■ Grey	3000K	17.1W	2.052lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-321269	VK/04350/PE/D/G/24/935/15	■ Grey	3500K	16.4W	2.124lm	D	24°	CRI>90	HEP 500mA	6pcs
64175-322269	VK/04350/PE/D/G/24/940/15	■ Grey	4000K	16.0W	2.164lm	D	24°	CRI>90	HEP 500mA	6pcs


Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-323269	VK/04350/PE/D/W/40/927/15	□ White	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64175-324269	VK/04350/PE/D/W/40/930/15	□ White	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-325269	VK/04350/PE/D/W/40/935/15	□ White	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-326269	VK/04350/PE/D/W/40/940/15	□ White	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-327269	VK/04350/PE/D/B/40/927/15	■ Black	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64175-328269	VK/04350/PE/D/B/40/930/15	■ Black	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-329269	VK/04350/PE/D/B/40/935/15	■ Black	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-330269	VK/04350/PE/D/B/40/940/15	■ Black	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-331269	VK/04350/PE/D/G/40/927/15	■ Grey	2700K	18.5W	1.958lm	E	40°	CRI>90	HEP 500mA	6pcs
64175-332269	VK/04350/PE/D/G/40/930/15	■ Grey	3000K	17.1W	2.052lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-333269	VK/04350/PE/D/G/40/935/15	■ Grey	3500K	16.4W	2.124lm	D	40°	CRI>90	HEP 500mA	6pcs
64175-334269	VK/04350/PE/D/G/40/940/15	■ Grey	4000K	16.0W	2.167lm	D	40°	CRI>90	HEP 500mA	6pcs

Details


Voltage **220-240V**. LED source **OSRAM**. Working temperature **-20°C → 50°C**. Lifetime **60.000hrs**. Clicks **100.000**. Material **Aluminium**.

5 years guarantee   **IP20.**



VK/04350/18



VK/04350/24



VK/04350/40



VK/04350/HONEYCOMB


Product Models

Code	Model	Box
64174-742269	VK/04350/HONEYCOMB Black. Metal. Filter.	1pc

Details

Can be used to **VK/04350**. Material **Metal**.

Black metal



Pendant lights LED

ø8cm
18° 24° 40°

Flicker free

VK/04352/PE/.../17



Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-335269	VK/04352/PE/W/18/927/17	□ White	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64175-336269	VK/04352/PE/W/18/930/17	□ White	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-337269	VK/04352/PE/W/18/935/17	□ White	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-338269	VK/04352/PE/W/18/940/17	□ White	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-339269	VK/04352/PE/W/18/865/17	□ White	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64175-340269	VK/04352/PE/B/18/927/17	■ Black	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64175-341269	VK/04352/PE/B/18/930/17	■ Black	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-342269	VK/04352/PE/B/18/935/17	■ Black	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-343269	VK/04352/PE/B/18/940/17	■ Black	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-344269	VK/04352/PE/B/18/865/17	■ Black	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64175-345269	VK/04352/PE/G/18/927/17	■ Grey	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64175-346269	VK/04352/PE/G/18/930/17	■ Grey	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-347269	VK/04352/PE/G/18/935/17	■ Grey	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-348269	VK/04352/PE/G/18/940/17	■ Grey	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-349269	VK/04352/PE/G/18/865/17	■ Grey	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64175-350269	VK/04352/PE/W/24/927/17	□ White	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64175-351269	VK/04352/PE/W/24/930/17	□ White	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-352269	VK/04352/PE/W/24/935/17	□ White	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-353269	VK/04352/PE/W/24/940/17	□ White	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-354269	VK/04352/PE/W/24/865/17	□ White	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs
64175-355269	VK/04352/PE/B/24/927/17	■ Black	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64175-356269	VK/04352/PE/B/24/930/17	■ Black	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-357269	VK/04352/PE/B/24/935/17	■ Black	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-358269	VK/04352/PE/B/24/940/17	■ Black	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-359269	VK/04352/PE/B/24/865/17	■ Black	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs


Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-360269	VK/04352/PE/G/24/927/17	■ Grey	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64175-361269	VK/04352/PE/G/24/930/17	■ Grey	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-362269	VK/04352/PE/G/24/935/17	■ Grey	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-363269	VK/04352/PE/G/24/940/17	■ Grey	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-364269	VK/04352/PE/G/24/865/17	■ Grey	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs
64175-365269	VK/04352/PE/W/40/927/17	□ White	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64175-366269	VK/04352/PE/W/40/930/17	□ White	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-367269	VK/04352/PE/W/40/935/17	□ White	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-368269	VK/04352/PE/W/40/940/17	□ White	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-369269	VK/04352/PE/W/40/865/17	□ White	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs
64175-370269	VK/04352/PE/B/40/927/17	■ Black	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64175-371269	VK/04352/PE/B/40/930/17	■ Black	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-372269	VK/04352/PE/B/40/935/17	■ Black	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-373269	VK/04352/PE/B/40/940/17	■ Black	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-374269	VK/04352/PE/B/40/865/17	■ Black	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs
64175-375269	VK/04352/PE/G/40/927/17	■ Grey	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64175-376269	VK/04352/PE/G/40/930/17	■ Grey	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-377269	VK/04352/PE/G/40/935/17	■ Grey	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-378269	VK/04352/PE/G/40/940/17	■ Grey	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-379269	VK/04352/PE/G/40/865/17	■ Grey	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs

Details


Voltage 220-240V. LED source **OSRAM**. Working temperature -20°C → 50°C. Lifetime 60.000hrs. Clicks 100.000. Material Aluminium.

5 years guarantee   **IP20.**


VK/04352/18



VK/04352/24



VK/04352/40



VK/04352/HONEYCOMB

Product Models

Code	Model	Box
64174-770269	VK/04352/HONEYCOMB Black. Metal. Filter.	1pc

Details

Can be used to VK/04352. Material Metal.

Black metal



Pendant lights LED Dimmable



VK/04352/PE/D/.../17

Product Models

Code	Model	Color	Kelvin	Watt	Lumen	Energy_class	Degrees	CRI	Driver	Box
64175-380269	VK/04352/PE/D/W/18/927/17	□ White	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64175-381269	VK/04352/PE/D/W/18/930/17	□ White	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-382269	VK/04352/PE/D/W/18/935/17	□ White	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-383269	VK/04352/PE/D/W/18/940/17	□ White	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-384269	VK/04352/PE/D/W/18/865/17	□ White	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64175-385269	VK/04352/PE/D/B/18/927/17	■ Black	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64175-386269	VK/04352/PE/D/B/18/930/17	■ Black	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-387269	VK/04352/PE/D/B/18/935/17	■ Black	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-388269	VK/04352/PE/D/B/18/940/17	■ Black	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-389269	VK/04352/PE/D/B/18/865/17	■ Black	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64175-390269	VK/04352/PE/D/G/18/927/17	■ Grey	2700K	27.0W	2.828lm	E	18°	CRI>90	HEP 700mA	6pcs
64175-391269	VK/04352/PE/D/G/18/930/17	■ Grey	3000K	25.5W	2.959lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-392269	VK/04352/PE/D/G/18/935/17	■ Grey	3500K	24.3W	3.071lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-393269	VK/04352/PE/D/G/18/940/17	■ Grey	4000K	23.7W	3.137lm	D	18°	CRI>90	HEP 700mA	6pcs
64175-394269	VK/04352/PE/D/G/18/865/17	■ Grey	6500K	18.7W	2.935lm	C	18°	CRI>80	HEP 550mA	6pcs
64175-395269	VK/04352/PE/D/W/24/927/17	□ White	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64175-396269	VK/04352/PE/D/W/24/930/17	□ White	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-397269	VK/04352/PE/D/W/24/935/17	□ White	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-398269	VK/04352/PE/D/W/24/940/17	□ White	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-399269	VK/04352/PE/D/W/24/865/17	□ White	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs
64175-400269	VK/04352/PE/D/B/24/927/17	■ Black	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64175-401269	VK/04352/PE/D/B/24/930/17	■ Black	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-402269	VK/04352/PE/D/B/24/935/17	■ Black	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-403269	VK/04352/PE/D/B/24/940/17	■ Black	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-404269	VK/04352/PE/D/B/24/865/17	■ Black	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs


Code	Model	Color	Kelvin	Watt	Lumen	Energy class	Degrees	CRI	Driver	Box
64175-405269	VK/04352/PE/D/G/24/927/17	■ Grey	2700K	27.0W	2.828lm	E	24°	CRI>90	HEP 700mA	6pcs
64175-406269	VK/04352/PE/D/G/24/930/17	■ Grey	3000K	25.5W	2.959lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-407269	VK/04352/PE/D/G/24/935/17	■ Grey	3500K	24.3W	3.071lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-408269	VK/04352/PE/D/G/24/940/17	■ Grey	4000K	23.7W	3.137lm	D	24°	CRI>90	HEP 700mA	6pcs
64175-409269	VK/04352/PE/D/G/24/865/17	■ Grey	6500K	18.7W	2.935lm	C	24°	CRI>80	HEP 550mA	6pcs
64175-410269	VK/04352/PE/D/W/40/927/17	□ White	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64175-411269	VK/04352/PE/D/W/40/930/17	□ White	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-412269	VK/04352/PE/D/W/40/935/17	□ White	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-413269	VK/04352/PE/D/W/40/940/17	□ White	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-414269	VK/04352/PE/D/W/40/865/17	□ White	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs
64175-415269	VK/04352/PE/D/B/40/927/17	■ Black	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64175-416269	VK/04352/PE/D/B/40/930/17	■ Black	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-417269	VK/04352/PE/D/B/40/935/17	■ Black	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-418269	VK/04352/PE/D/B/40/940/17	■ Black	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-419269	VK/04352/PE/D/B/40/865/17	■ Black	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs
64175-420269	VK/04352/PE/D/G/40/927/17	■ Grey	2700K	27.0W	2.828lm	E	40°	CRI>90	HEP 700mA	6pcs
64175-421269	VK/04352/PE/D/G/40/930/17	■ Grey	3000K	25.5W	2.959lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-422269	VK/04352/PE/D/G/40/935/17	■ Grey	3500K	24.3W	3.071lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-423269	VK/04352/PE/D/G/40/940/17	■ Grey	4000K	23.7W	3.137lm	D	40°	CRI>90	HEP 700mA	6pcs
64175-424269	VK/04352/PE/D/G/40/865/17	■ Grey	6500K	18.7W	2.935lm	C	40°	CRI>80	HEP 550mA	6pcs

Details


Voltage 220-240V. LED source **OSRAM**. Working temperature -20°C → 50°C. Lifetime 60.000hrs. Clicks 100.000.
Material Aluminium.

5 years guarantee   **IP20.**



VK/04352/18



VK/04352/24



VK/04352/40



VK/04352/HONEYCOMB

Product Models

Code
64174-770269


Model
VK/04352/HONEYCOMB
Black. Metal. Filter.

Box
1pc

Details

Can be used to **VK/04352**. Material **Metal**.

Black metal




Model (track, wall, ceiling, pendant)	Kelvin	Watt	Lumen	Degrees	CRI	Driver
VK/04350/.../.../827	2700K	13.5W	2487lm	18° / 24° / 40°	CRI>80	OSRAM 500mA
VK/04350/.../.../830	3000K	12.7W	2628lm	18° / 24° / 40°		
VK/04350/.../.../835	3500K	12.4W	2669lm	18° / 24° / 40°		
VK/04350/.../.../840	4000K	11.9W	2774lm	18° / 24° / 40°		
VK/04352/.../.../827	2700K	21.4W	3407lm	18° / 24° / 40°	CRI>80	OSRAM 700mA
VK/04352/.../.../830	3000K	20.3W	3556lm	18° / 24° / 40°		
VK/04352/.../.../835	3500K	20.9W	3476lm	18° / 24° / 40°		
VK/04352/.../.../840	4000K	18.9W	3780lm	18° / 24° / 40°		
VK/04354/.../.../827	2700K	41.1W	4722lm	18° / 24° / 40°	CRI>80	OSRAM 1050mA
VK/04354/.../.../830	3000K	36.1W	5228lm	18° / 24° / 40°		
VK/04354/.../.../835	3500K	37.7W	5052lm	18° / 24° / 40°		
VK/04354/.../.../840	4000K	34.0W	5489lm	18° / 24° / 40°		



▲ Η VK Leading Light επίσης σας δίνει την δυνατότητα κατασκευής όλων των φωτιστικών της σειράς VK/04350, VK/04352 και VK/04354 και σε μέτρηση **CRI>80**, στην κλίμακα 0 έως 100, ώστε να υπάρχει μεγαλύτερη ποικιλία σε Watt και lumen.

▲ VK Leading Light also gives you the possibility to manufacture all the lights of the VK/04350, VK/04352 and VK/04354 series in a **CRI>80** measurement, on the scale of 0 to 100, so that there is more variety in Watt and lumen.

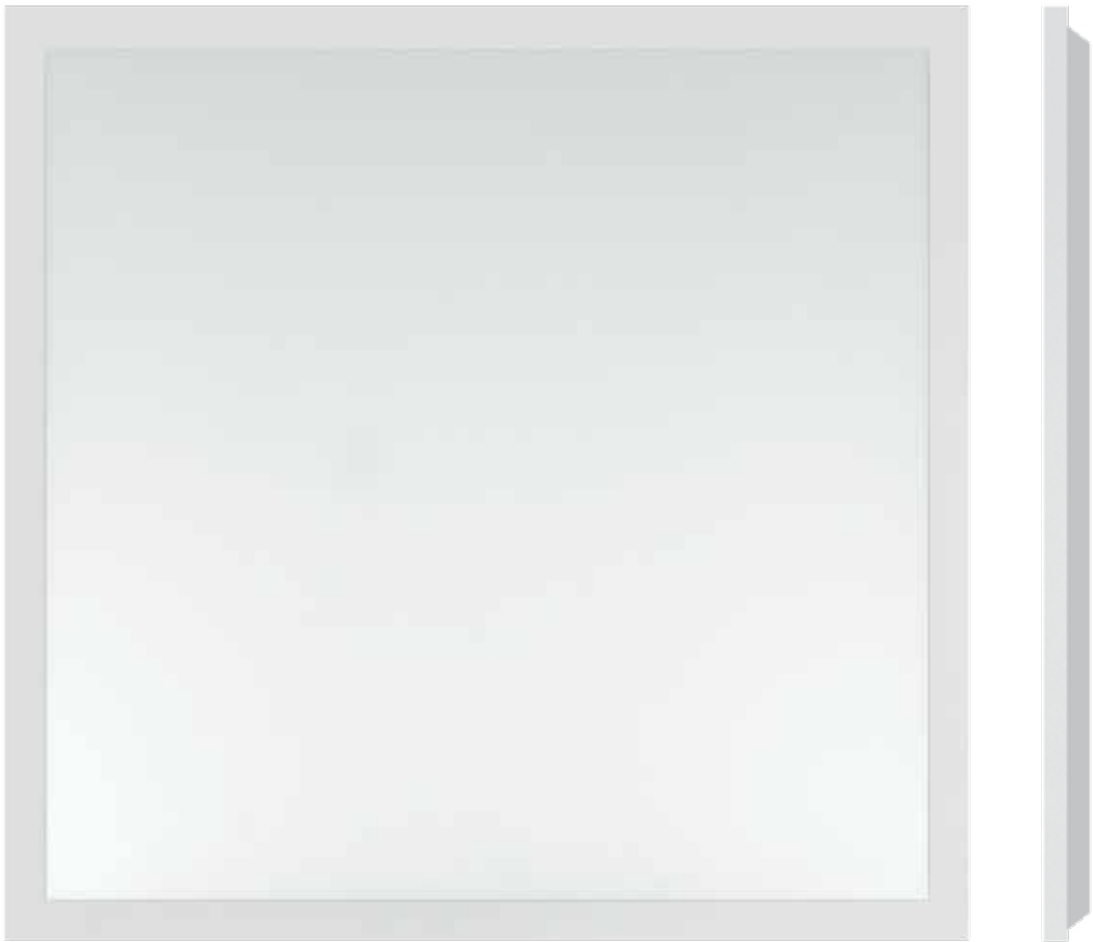

VK/04424
with **PHILIPS** driver

Product Models

Code	Model	Color	Kelvin	Lumen	Watt	Degrees	Driver	UGR	Box
63158-260727	VK/04424/W/W	□ White	3000K	4.000lm	40W	115°	LED driver PHILIPS		10pcs
63158-261727	VK/04424/W/C	□ White	4000K	4.400lm	40W	115°	LED driver PHILIPS		10pcs
63158-263727	VK/04424/W/W/19	□ White	3000K	3.240lm	36W	115°	LED driver PHILIPS	UGR<19	10pcs
63158-262727	VK/04424/W/C/19	□ White	4000K	3.600lm	36W	115°	LED driver PHILIPS	UGR<19	10pcs


Details

Led Panel Light 220-240V. CRI>80. LED **OSRAM** SMD 2835 with **PHILIPS** flicker free driver PF>0.95. Lifetime 50.000hrs. Clicks 50.000. Working temperature -20°C → 45°C. Material Aluminium, plastic.

5 years guarantee   **IP20. 36W/42W.**



LED SMD 2835 **OSRAM**
170

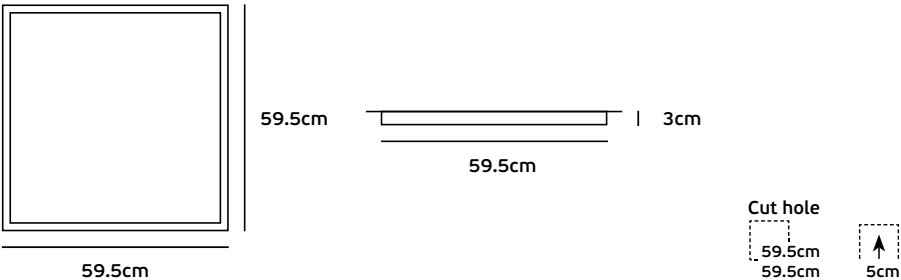



VK/04426
with driver

Product Models

Code	Model	Color	Kelvin	Lumen	Watt	Degrees	Driver	UGR	Box
63158-292123	VK/04426/W/W/19	□ White	3000K	4.000lm	40W	90°	CRI>80	UGR<19	1pc
63158-291123	VK/04426/W/C/19	□ White	4000K	4.000lm	40W	90°	CRI>80	UGR<19	1pc


Details

AC Driver **85-265V** (Included). Beam Angle **115°**. CRI>80. LED **SMD 4014**. Lifetime **50.000hrs**. Clicks **50.000**. Working temperature < **45°C**.
Material **Aluminium, PMMA**. Unified Glare Rating **UGR<19**.


5 years guarantee



IP40. 40W.

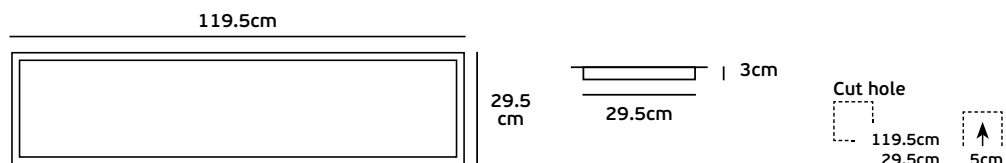


VK/09

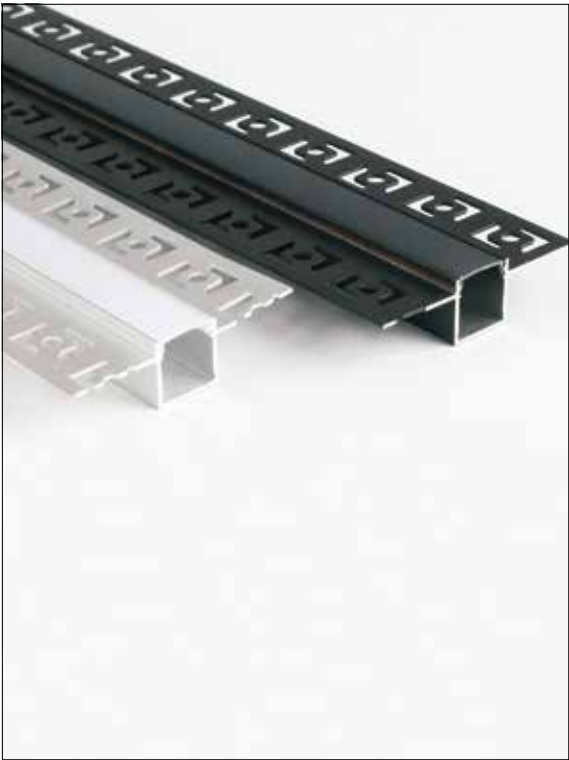


Product Models		
Code	Model	Box
75165-269264	VK/09/AL/W □ Aluminium + white cover. 2.000x14.4x14.9mm	1pc
75165-271264	VK/09/B/B ■ Black aluminium + black cover. 2.000x14.4x14.9mm	1pc

Details
Use Recessed trimless. Length 2m + 2 end caps. Working temperature -20°C → 40°C.
Material Aluminium.

IP20.




VK/10

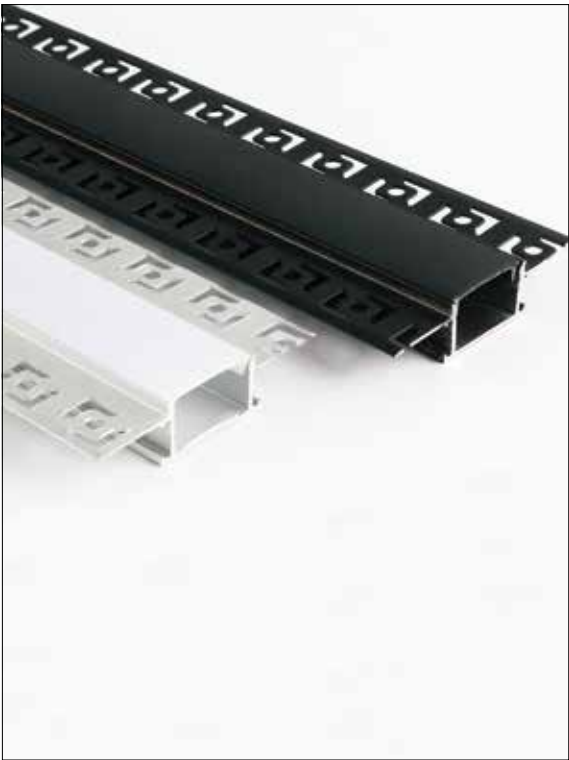

Product Models		
Code	Model	Box
75165-270264	VK/10/AL/W □ Aluminium + white cover. 2.000x13.8x28.4mm	1pc
75165-272264	VK/10/B/B ■ Black aluminium + black cover. 2.000x13.8x28.4mm	1pc

Details
Use Recessed trimless. Length 2m + 2 end caps. Working temperature -20°C → 40°C.
Material Aluminium.

IP20.

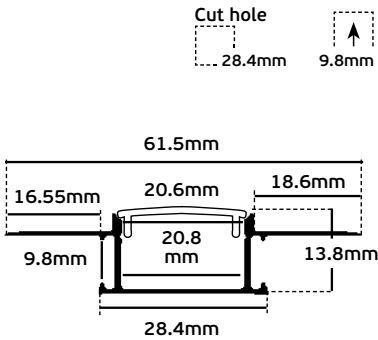

VK/12




Product Models

Code	Model	Box
75165-212264	VK/12/AL Aluminium. 2.000x17.4x12mm	100pcs

Details

Charged **per meter**. Available **2m**. Material **Aluminium**.

IP20.



VK/K01




Product Models

Code	Model	Box
75165-039264	VK/K01/CL Clear. 2.000x16x4.5mm	100pcs
75165-062264	VK/K01/W Frost. 2.000x16x4.5mm	100pcs

Details

Suitable for: VK/01R/DEEP/TRIMLESS/AL, VK/12/AL.
Material **Polycarbonate**. Charged **per meter**. Available **2m**.

IP20.



VK/GU10-E27/EME/3A




Product Models

Code	Model	Box
78000-001724	VK/GU10-E27/EME/3A □ Aluminium + white cover. Lithium-Iron 3Ah	1pc

Details
Duration 1-3 hours. Load 3-10W max. Emergency Power 3-10W.
Voltage AC90-277V, 50Hz/60Hz

IP20.

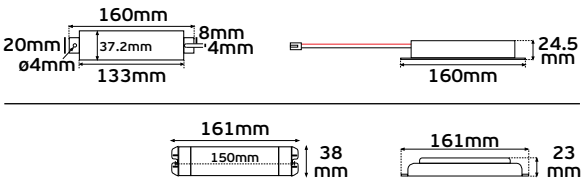

VK/GU10-E27/EME/6A





Product Models

Code	Model	Box
78000-002724	VK/GU10-E27/EME/6A □ Aluminium + white cover. Lithium-Iron 6Ah	1pc

Details
Duration 3 hours. Load 7W max. Emergency Power 7W.
Voltage AC90-277V, 50Hz/60Hz

IP20.

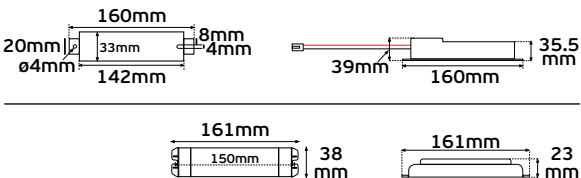

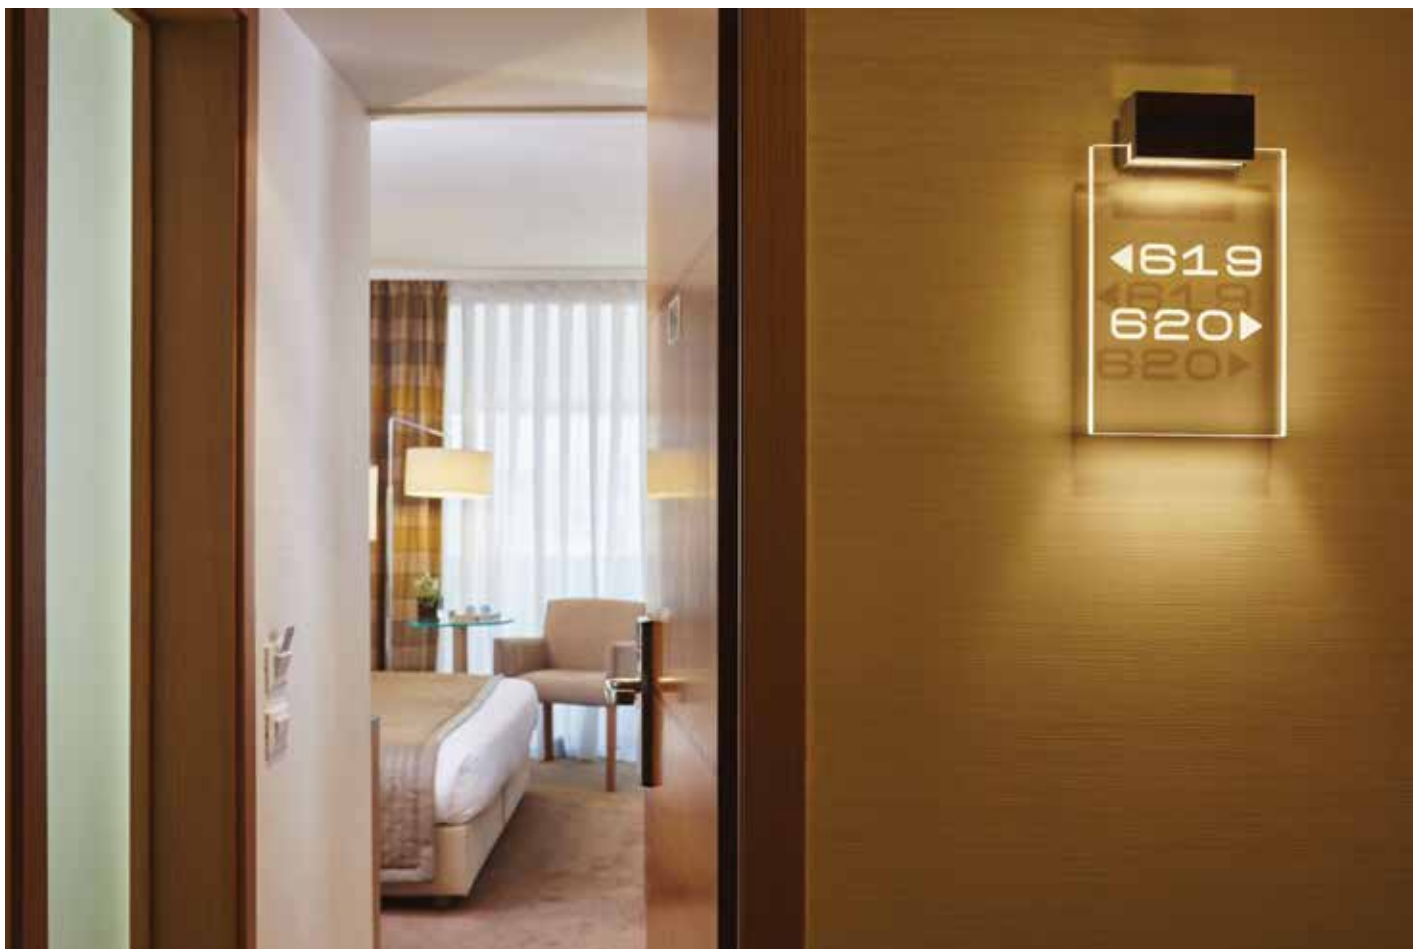

VK/04244, VK/04246


Product Models

Code	Model	Color	Kelvin	Lumen	Watt	Degrees	CRI	Box
64174-033126	VK/04244/MC/BL	■ Matt Nickel	Blue	300lm	2W	120°	CRI>70	30pcs
64174-034126	VK/04246/MC/BL	■ Matt Nickel	Blue	300lm	2W	120°	CRI>70	30pcs


Details

Voltage 230V. Watt 2W. Type of LED SMD 5730. CRI>70. Beam angle 120°. No dimmable. Lifetime 30.000hrs. Working temperature -20°C→ 45°C. Material Acrylic, iron base. 2 years guarantee.

IP20. 2W.

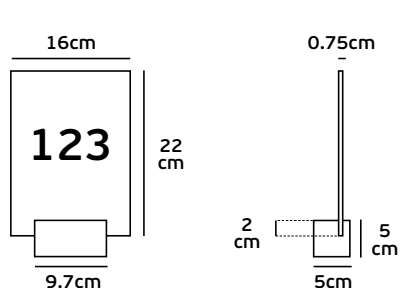

VK/04244

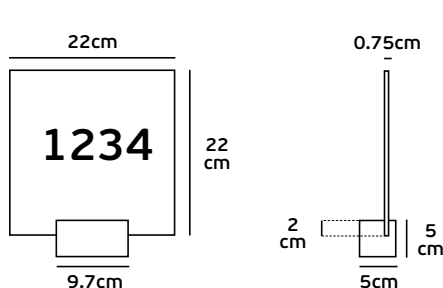

VK/04246

A40PBOX_100DB-150DB



Product Models

Code	Model	Box
78000-696255	A40PBOX_100DB 4.16A. 100W. 24V. Dimmable LED Driver DALI/0-10V/1-10V/Push	1pc
78000-693255	A40PBOX_150DB 6.25A. 150W. 24V. Dimmable LED Driver DALI/0-10V/1-10V/Push	1pc

Details


Voltage 100-250V. Watt 100W. 150W. Material Plastic.  . 5 years guarantee.



5 years guarantee



IP20. 100W. 150W



A40SLBOX_60DB



Product Models

Code	Model	Box
78000-694255	A40SLBOX_60DB 2.5A. 60W. 24V. Dimmable LED Driver DALI/1-10V/Push	1pc

Details


Voltage 100-250V. Watt 60W. Material Plastic.  . 5 years guarantee.



5 years guarantee



IP20. 60W



A40PBF0_60DOB_100DOB



Product Models

Code	Model	Box
78000-695255	A40PBF0_60DOB 2.5A. 60W. 24V. LED Driver DALI/Push	1pc
78000-699255	A40PBF_100DOB 4.16A. 100W. 24V. LED Driver DALI/Push	1pc

Details


Voltage 100-250V. Watt 60W. 100W. Material Plastic.  . 5 years guarantee.



5 years guarantee



IP20. 60W. 100W



A40PLKE_1090B_2050B



Product Models

Code	Model	Box
78000-697255	A40PLKE_1090B 350mA. 11.5W. 33V. Dimmable LED Driver for High Brightness LEDs	1pc
78000-698255	A40PLKE_2050B 500mA. 10W. 20V. Dimmable LED Driver for High Brightness LEDs	1pc

Details

Voltage 230V. Watt 11.5W. 10W. Material Plastic.  . 5 years guarantee.





5 years guarantee



TRIAC/IGBT/MOSFET

IP20. 11.5W. 10W



A40DALI_1102B



Product Models

Code	Model	Box
78000-700255	A40DALI_1102B 12A. 144/288W. 24V. DALI/0-10V/1-10V interface and low voltage push	1pc

Details

Voltage 12-24V/DC. Watt 144/288W. Material Plastic. PWM controller.  . 5 years guarantee.





5 years guarantee



DALI/PUSH
0/1-10V

IP20. 144/288W.



A40PBOX_20D2B



Product Models

Code	Model	Box
78000-703255	A40PBOX_20D2B 8.32A. 200W. 24V. Dimmable LED Driver DALI/Push	1pc

Details

Voltage 100-250V. Watt 200W. Material Plastic.  . 5 years guarantee.





5 years guarantee



DALI/PUSH

IP20. 200W





Leading light 1978 * new products catalogue 22-23 *

catalogue * vk leading light 1978 * new products catalogue